

THE COUPLING.

R+W[®]
A POPPE + POTTHOFF COMPANY

INDUSTRIAL COUPLINGS

AUGEMENTED REALITY APP


NEXT LEVEL INFORMATION DISCOVER THE FUTURE TODAY

The R+W app blurs the borders between the real and virtual worlds. Thanks to Augmented Reality technology, you can experience the R+W product portfolio like never before



Every product image in our catalog shown with this icon contains additional information. With your smartphone or tablet, you unlock all of this in virtual reality.

JUST A FEW STEPS TO AUGMENTED REALITY

1. Download the free R+W App from the App Store or Google Play. It is available for all devices with iOS version 7.0 or higher, as well as Android devices with version 4.1 or higher.
2. Wherever you see an image with the Augmented Reality icon  in the catalog, you can use the Augmented Reality app to learn more about product.
3. The app will recognize the image and display the AR content. To enter the virtual world, simply hold your mobile device 20-30 cm above the brochure and move it slightly. 3D models, animations, videos, and other information are waiting to be discovered.



Download the R+W AR App free from the App Store or Google Play now.

The R+W App is also available as Windows version (rw-couplings.com/app/).



NEXT LEVEL COMMUNICATION

SOCIALIZING WITH R+W

Would you like to learn more about R+W and our couplings? We are pleased to take you into the world of R+W. On our YouTube channel, you can find several videos pertaining to our product line.

Are you more interested in application examples for our couplings? If so, please take a look at our case studies that can be found on our homepage. Here you can also subscribe to the R+W newsletter or find a link to download the R+W App.

And if you simply cannot get enough of us, you can find us on Facebook, Google+, and Twitter.



WHO WE ARE.

ABOVE ALL R+W IS: THE PERFECT COUPLING

When R+W Antriebselemente GmbH was first established in 1990 in Klingenberg, Germany, there were three people on board. The head office is still there, but we are now more than 220 people, with subsidiaries in the USA, China, Italy, Singapore, France and Slovakia, and are partnered with over 60 well established distributors in more than 50 countries throughout the world. Many developments have led to this success, but most importantly it was brought about by our endless search for the best possible coupling solutions as well as the high esteem in which we hold all of our customers.

WE PROVIDE INSPIRED SOLUTIONS BACKED BY SOUND PLANNING AND DESIGN.

R+W stands for expertise in the development of solutions for precise torque transmission. The focus of our development is on innovative coupling systems for all sectors of precision drive technology. As a leading manufacturer of precision couplings and line shafts, we strive to maintain a permanent status of technology leadership in our field. Our central claim: R+W couplings ensure precision for process reliability and efficiency, and to that end we seek perfection.

Optimized for technology and business, our product portfolio includes:

- ▶ **Bellows couplings**
- ▶ **Metallic couplings**
- ▶ **Elastic couplings**
- ▶ **Ball-detent safety couplings**
- ▶ **Drive shafts**
- ▶ **Development of customized solutions with collaboration from start to finish, including:**
 - Consultation
 - Conception
 - Engineering analysis
 - Prototyping
 - Manufacturing

TO THE TOP OF THE WORLD WITH TONS OF DRIVE

Our guiding principle, DRIVE, is a mutual calling that unifies our 220 employees: To manufacture top-notch, high-performance couplings and torque limiters for the global market; precise to the micrometer.

With DRIVE, we present ourselves as a Dynamic, Reliable, Innovative and Versatile market and technology leader that strives for Expansion by making further development and improvement part of our everyday business.

DRIVE MEANS

DYNAMIC

Dynamics fascinate us. For our team “dynamic” means outstanding expertise in all matters involving torque transmission and ideal collaboration for the acquisition and application of company knowledge. We work shoulder to shoulder with our customers on a dynamic course toward performance and corporate excellence!

RELIABLE

Our course is set for the future! R+W makes state of the art, zero backlash, wear free coupling systems for the leading industries in drive technology. In addition, we manufacture pioneering special solutions produced with absolute precision. Our reliable products are a sound investment in the efficiency and dependability of your systems and machines.

INNOVATIVE

We understand that adaptability is one of the most significant strengths of our company. A creative work environment based on the spirit of innovation does not happen by accident; instead it is the result of consistent effort.

In order to remain at the heart of technology development, we network tightly with the elite industry leaders and collaborate intensively with universities and technical colleges. This has led to the creation of a prolific research & development department in which we have been able to prototype and test our own inventions.

VERSATILE

Versatility at R+W begins with leveraging the creativity, skills and capacities of our employees. With a broad foundation and a solution oriented mindset, we work in accordance with customer requirements and respond quickly to changes. For this very reason we are also the perfect partner for designing, engineering, and manufacturing unique and special couplings. We are particularly proud of the high level of diversification of our products and of our dedication to continuous improvement.

EXPANDING

Expansion is a critical objective for the future of our company. Most importantly for us this means maintaining genuine industry contacts in a continuously growing global network of expertise. Our customers benefit from our broad based proximity to the market and from strong collaboration with our partners. This allows us to stay focused on our customers’ most up to date requirements, keeping us flexible and able to respond to inquiries with the right solution!

OTHER R+W COUPLINGS

Aside from the products detailed in this catalog, we also offer high quality shaft couplings and torque limiters for servo motion control and other small to midsize precision applications.

More information on these can be found in our PRECISION COUPLINGS guide book.



APPLICATIONS AND DESIGN FEATURES INDUSTRIAL DRIVE COUPLINGS

SIZING AND SELECTION

P. 9

INSTALLATION AND HANDLING

P. 31

TORQSET® SAFETY COUPLINGS

ST

P. 41

from **200 – 250,000 Nm**

AREAS OF APPLICATION

- ▶ timber processing machinery
- ▶ bulk material handling systems
- ▶ tunnel boring machinery
- ▶ industrial shredders
- ▶ rotary test stands
- ▶ extruder drives
- ▶ wastewater scraper drives
- ▶ wherever potential for torque overload exists

FEATURES

- ▶ compact, simple design
- ▶ precise overload protection
- ▶ adjustable disengagement torque
- ▶ robust
- ▶ full disengagement up on overload

HIGH STRENGTH DISC PACK COUPLINGS

LP

P. 65

from **350 – 50,000 Nm**

AREAS OF APPLICATION

- ▶ API 610 pump packages
- ▶ paper machinery
- ▶ steel mill equipment
- ▶ test stands
- ▶ generators
- ▶ bulk material handling systems
- ▶ centrifuges
- ▶ cooling tower drives
- ▶ compressors
- ▶ printing machinery
- ▶ for infinite life in extreme conditions

FEATURES

- ▶ maintenance free for infinite life
- ▶ frictional clamping of disc packs
- ▶ high speeds with extended DBSE
- ▶ zero backlash
- ▶ high torsional stiffness
- ▶ low restoring forces from misalignment

FLEXIBLE GEAR COUPLINGS

BZ

P. 93

from **1,900 – 2,080,000 Nm**

AREAS OF APPLICATION

- ▶ mixers
- ▶ rolling mills
- ▶ conveyors
- ▶ crushers
- ▶ shredders
- ▶ levelers
- ▶ wherever high torque and low cost meet

FEATURES

- ▶ very compact design
- ▶ corrosion resistant
- ▶ large misalignment compensation
- ▶ reduced wear design
- ▶ low maintenance

TORSIONALLY STIFF BELLOWS COUPLINGS

BX

P. 103

from **10,000 – 100,000 Nm**

AREAS OF APPLICATION

- ▶ test stands
- ▶ centrifuges
- ▶ wind energy
- ▶ machine tools
- ▶ printing machinery
- ▶ wherever precise transmission is required

FEATURES

- ▶ robust construction
- ▶ high torsional stiffness
- ▶ fatigue resistant for infinite life
- ▶ easy to mount and dismount
- ▶ precise rotational transmission
- ▶ minimal restoring loads under misalignment

BACKLASH FREE SERVOMAX® ELASTIC JAW COUPLINGS

EK
EZ

P. 109

from **1,950 – 25,000 Nm**

AREAS OF APPLICATION

- ▶ pump systems
- ▶ conveyors
- ▶ material handling systems
- ▶ extruder drives
- ▶ crushers
- ▶ shredders
- ▶ wherever shock, vibration, and misalignment need to be absorbed

FEATURES

- ▶ vibration damping
- ▶ electrically isolating (standard version)
- ▶ misalignment compensation
- ▶ backlash free
- ▶ maintenance free

FOR USE IN HAZARDOUS ENVIRONMENTS

ATEX

P. 117

AREAS OF APPLICATION




for safer operation in industries with explosive atmospheres, such as:

- ▶ oil & gas extraction
- ▶ petrochemical processing
- ▶ munitions manufacturing
- ▶ bulk and powder processing
- ▶ paint systems

FEATURES

For hazardous zones 1/21 and 2/22 these couplings are authorized under directive 94/9/EG.

- ▶ Safety couplings
- ▶ Bellows couplings
- ▶ Elastic jaw couplings
- ▶ Disc pack couplings

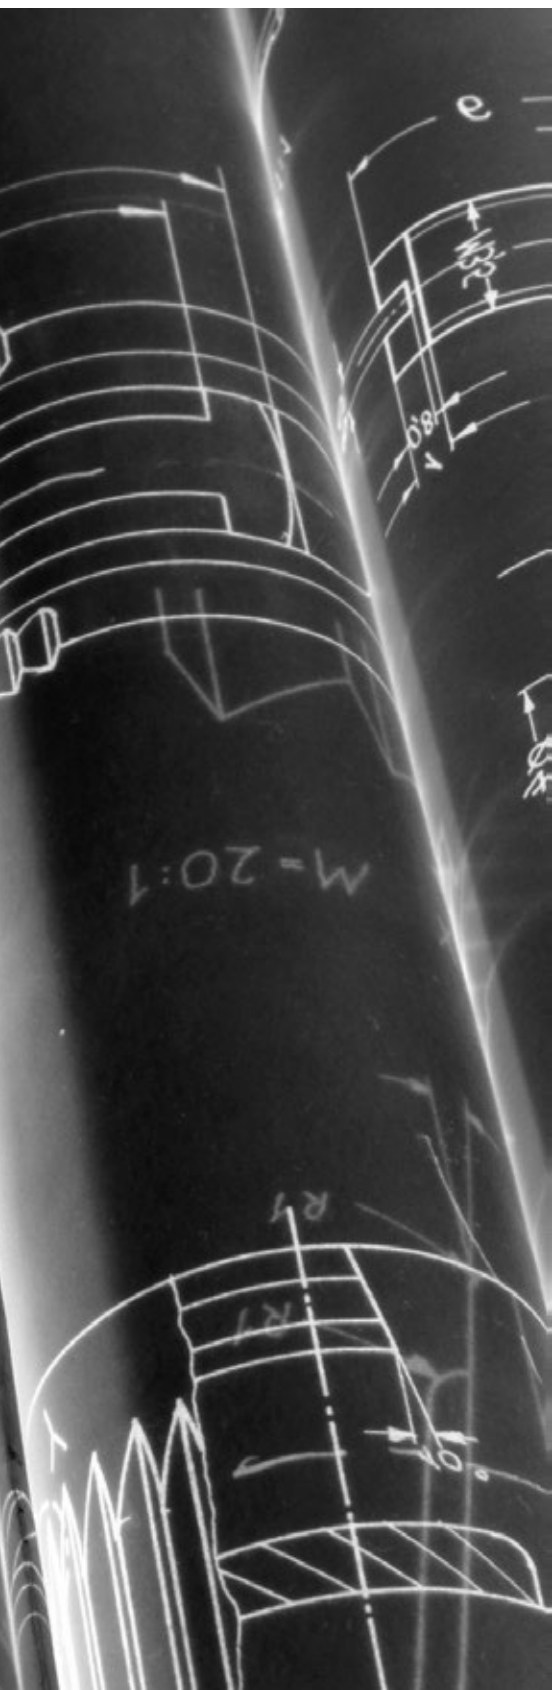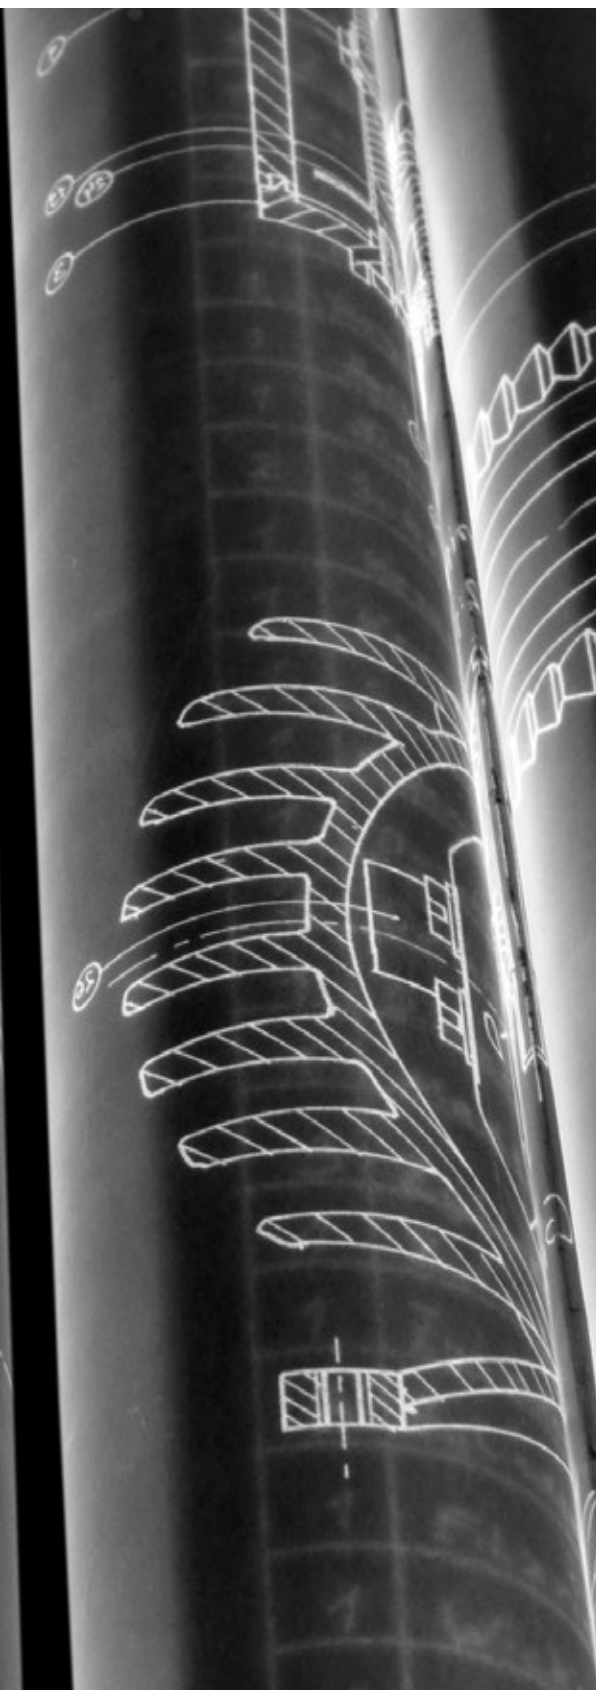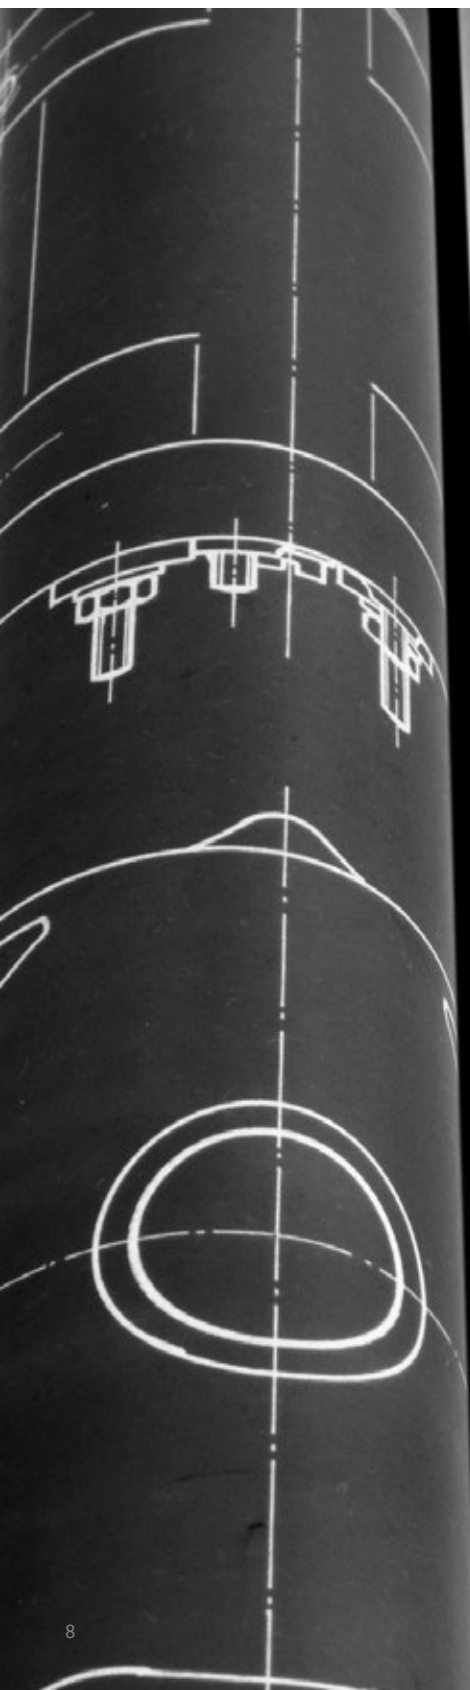

SIZING AND SELECTION

According to
DIN 740 part 2

GENERAL INFORMATION

SAFETY COUPLINGS

ST

SAFETY COUPLINGS


RELIABLE TORQUE OVERLOAD PROTECTION

ST series safety couplings are designed to decouple machine drives in the event of torque overload, preventing damage and downtime.


A series of ball bearings are spring loaded into detents on an otherwise freely spinning output plate. In the case of the ST series, these ball bearings are mounted onto plungers which are individually loaded in order to generate high clutching forces while maintaining a relatively small profile.

The transmittable torque is determined by the number and force setting of the safety elements and their distance from the center of the rotational axis. In the event of an overload, the force applied by the detents causes the plungers to overcome the spring loading and retract into the housings, resulting in a complete separation of the driving and driven hubs.


They will not re-engage automatically. After the overload condition has passed, an axial force must be applied in order to re-engage the safety elements into the detents of the output plate.

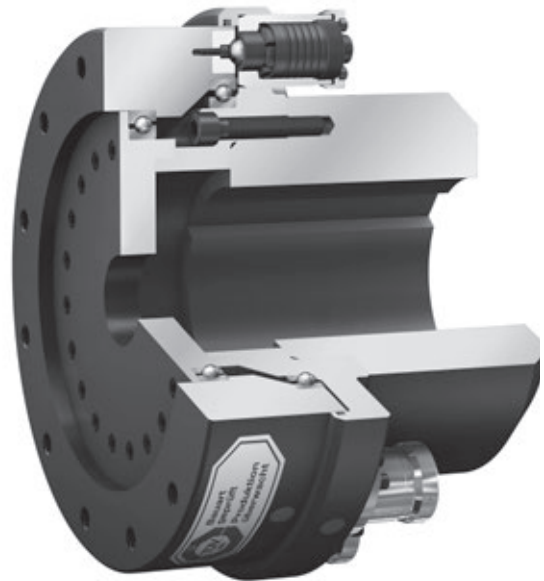

The safety elements consist of two components: the detent receptacle and the adjustable plunger mechanism.

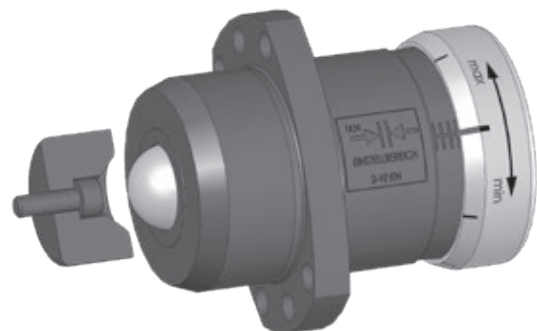

TORQUE ADJUSTMENT

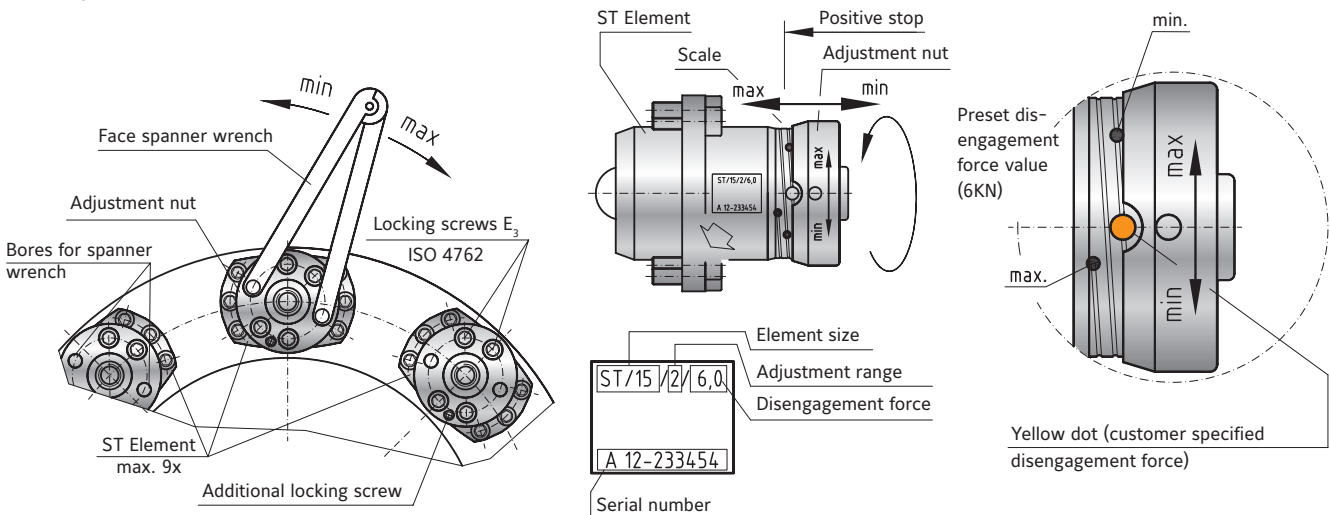


After loosening (approx. 1 rotation) the locking screws (E₃), the adjustment nut can be turned to adjust the disengagement setting. Minimum, maximum and preset values are marked on the adjustment scale. After adjustment, the torque setting is secured by tightening the locking screws (E₃).

► **Note**

All safety elements must be set to the same value.


RE-ENGAGEMENT OF THE SAFETY ELEMENTS

After the overload has been cleared, the drive or driven side must be rotated until the re-engagement position markings are lined up. The elements can only be re-engaged in this position. The element is re-engaged through applying an axial force to the plunger. Re-engagement is audible. Once this is complete, the torque limiter is ready for operation.

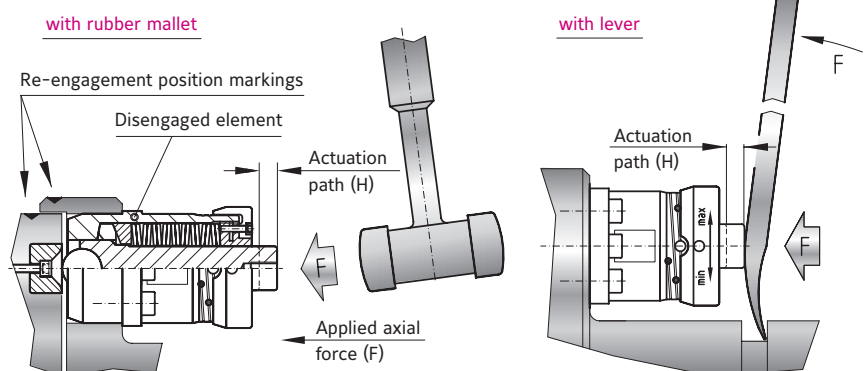

MANUAL DISENGAGEMENT OF ELEMENTS

Prior to machine start-up, the individual elements can be manually disengaged. A manual disengagement tool is available from R+W (see page 61).

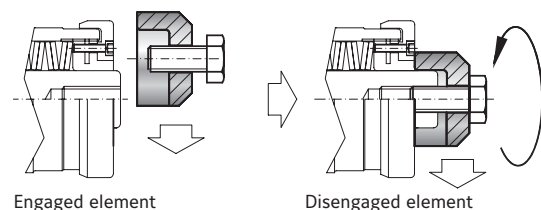

SAFETY COUPLINGS

SYMBOLS

| | |
|--------------|---|
| T_{AR} | = Disengagement torque of the coupling (Nm) |
| K | = Service factor |
| T_{max} | = Maximum torque of the drive system (Nm) |
| T_{AN} | = Rated torque of the motor (Nm) |
| P_{Drive} | = Drive power (kW) |
| n | = Drive speed (min^{-1}) |
| α | = Angular acceleration (rad/s^2) |
| t | = Acceleration time (s) |
| ω | = Angular velocity (rad/s) |
| J_L | = Moment of inertia of load (kgm^2) |
| J_A | = Moment of inertia of drive (kgm^2) |
| T_{AS} | = Peak motor torque (Nm) |
| S | = Number of safety elements |
| F | = Tangential force (kN) |
| r | = Radius to element (m) |
| s | = Spindle pitch (mm) |
| F_V | = Feed force (N) |
| η | = Spindle efficiency |
| d_0 | = Pitch diameter (mm) |
| F_V | = Feed force (N) |
| C_T | = Torsional stiffness of coupling (Nm/rad) |
| $J_{Masch.}$ | = Total load inertia (kgm^2) (e.g. shaft + sprocket + chain + roller + 1/2 of coupling) |
| $J_{Mot.}$ | = Total driving inertia (kgm^2) (e.g. motor shaft + 1/2 of coupling) |
| f_e | = Resonant frequency of the two mass system (Hz) |

| Shock or Load Factor S_A | | |
|--|------------------|------------------|
| uniform load | non-uniform load | heavy shock load |
| 1 | 2 | 3 |
| For many crushing and shredding applications load factors are commonly $S_A = 2-3$ | | |

ACCORDING TO DISENGAGEMENT TORQUE

Safety couplings are normally selected according to the required disengagement torque, which must be greater than the maximum torque required for start-up and operation.

Disengagement torque values are often determined from the drive data and are typically a multiple of the nominal torque at the operating drive speed (T_{AN}). In addition to a start-up torque (T_{max}), the following values are used as further safety factors, depending on the load conditions:

- $K = 1.3$ uniform harmonious load
- $K = 1.5$ non-uniform load
- $K = 1.8$ heavy shock load

$$T_{AR} \geq K \cdot T_{max} \text{ (Nm)}$$

or

$$T_{AN} \geq 9,550 \cdot \frac{P_{Drive}}{n} \text{ (Nm)}$$

ACCORDING TO ACCELERATION
(START-UP WITH NO LOAD)

$$T_{AR} \cong \frac{J_L}{J_A + J_L} \cdot T_{As} \cdot S_A \cong \alpha \cdot J_L \text{ (Nm)}$$



$$\alpha = \frac{\omega}{n} = \frac{\pi \cdot n}{t \cdot 30}$$

ACCORDING TO
ACCELERATION
(START-UP WITH LOAD)

$$T_{AR} \cong \left[\frac{J_L}{J_A + J_L} \cdot (T_{AS} - T_{AN}) + T_{AN} \right] \cdot S_A \cong \alpha \cdot J_L + T_{AN} \text{ (Nm)}$$

ACCORDING TO THE NUMBER
OF SAFETY ELEMENTS

$$T_{AR} = S \cdot F \cdot r$$

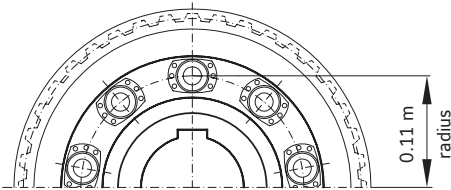

ACCORDING TO LINEAR FEED FORCE

Screw drive

$$T_{AN} = \frac{s \cdot F_v}{2,000 \cdot \pi \cdot \eta} \text{ (Nm)}$$

Rack and pinion drive

$$T_{AN} = \frac{d_0 \cdot F_v}{2,000} \text{ (Nm)}$$

ACCORDING TO RESONANT FREQUENCY

The torsional natural frequency of the coupling must be significantly higher or lower than that of the equipment. For the mechanical substitution model the two mass system applies.

$$f_e = \frac{1}{2 \cdot \pi} \sqrt{C_T \cdot \frac{J_{Masch} + J_{Mot}}{J_{Masch} \cdot J_{Mot}}} \text{ (Hz)}$$

SAFETY COUPLINGS

ELASTIC JAW COUPLING DESIGN ST2

| Size | | ST2 / 2 | ST2 / 5 | ST2 / 10 | ST2 / 25 | ST2 / 40 | ST2 / 60 | ST2 / 100 | ST2 / 160 |
|--------------------------------------|--|---------|---------|----------|----------|----------|----------|-----------|-----------|
| T_{KN} Rated Torque (Nm) | | 2,000 | 3,000 | 5,000 | 7,500 | 20,000 | 20,000 | 40,000 | 40,000 |
| T_{Kmax} Maximum Torque (Nm) | | 4,800 | 7,500 | 18,000 | 25,000 | 48,000 | 48,000 | 120,000 | 120,000 |
| Torsional Stiffness (10^3 Nm/rad) | | 58 | 92 | 145 | 230 | 500 | 580 | 850 | 1000 |
| Relative Damping | | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |

LOAD FACTORS BY MACHINE TYPE

EXCAVATORS

- S bucket chain excavators
- S traveling gear (caterpillar)
- M traveling gear (rails)
- M suction pumps
- S bucket wheels
- M slewing gears

CONSTRUCTION MACHINERY

- M concrete mixers
- M road construction machinery

CHEMICAL INDUSTRY

- M mixers
- G agitators (light fluids)
- M dryer drums
- G centrifuges

FEEDERS AND CONVEYORS

- S belt conveyors
- G belt conveyors (bulk materials)
- M belt bucket conveyors
- M screw conveyors
- M circular conveyors
- M hoists

BLOWERS AND FANS¹⁾

- G blowers (axial/radial) $P:n \leq 0.007$
- M blowers (axial/radial) $P:n \leq 0.07$
- S blowers (axial/radial) $P:n > 0.07$
- G cooling tower fans $P:n \leq 0.007$
- M cooling tower fans $P:n \leq 0.07$
- S cooling tower fans $P:n > 0.07$

GENERATORS AND TRANSFORMERS

- S generators

RUBBER MACHINERY

- S extruders
- S calendars
- M mixers
- S rolling millse

WOOD PROCESSING MACHINERY

- G woodworking machines

CRANES

- S traveling gears
- S hoisting gears
- M slewing gears

PLASTICS MACHINERY

- M mixers
- M shredders

METALWORKING MACHINERY

- M sheet metal bending machines
- S plate straightening machines

- S presses

- M shears
- S punch presses
- M machine tools, main drives

FOOD PROCESSING MACHINERY

- G filling machines
- M kneading machines
- M cane crushers
- M cane cutters
- S cane mills
- M sugar beet cutters
- M sugar beet washers

PAPER MACHINERY

- S wood cutters
- S calendars
- S wet presses
- S suction presses
- S suction rollers
- S drying cylinders

PUMPS

- S piston pumps
- G centrifugal pumps (light fluids)
- S reciprocating pumps

STONE AND CLAY MACHINES

- S breakers

- S rotary kilns
- S hammer mills
- S brick presses

TEXTILE MACHINERY

- M tanning vats
- M willows
- M looms

COMPRESSORS

- S reciprocating compressors
- M centrifugal compressors

METAL ROLLING MILLS

- M plate tilters
- S ingot handling machinery
- M winding machines (strip and wire)
- S descaling machines
- S cold rolling mills
- M chain transfers
- M cross transfers
- M roller straighteners
- S tube welding machines
- S continuous casting plants
- M roller adjustment drives

LAUNDRY MACHINES

- M tumblers
- M washing machines

WASTEWATER TREATMENT PLANTS

- M aerators
- G screw pumps

¹⁾ P = power of drive in kW
n = speed of drive in rpm

DESIGN FACTORS

Shock or Load Factor S_A

| Drive type | Load characteristics of driven machine | | |
|---|--|-----|-----|
| | G | M | S |
| electric motors, turbines, hydraulic motors | 1.25 | 1.6 | 2.0 |
| internal combustion engines ≥ 4 cylinder degree of uniformity $\geq 1:100$ | 1.5 | 2.0 | 2.5 |

G = smooth uniform load | M = moderate load | S = heavy shock load

Temperature Factor S_v

| Ambient Temperature | -40 C° +30 C° | +40 C° | +60 C° | +80 C° | > +80 C° |
|---------------------|------------------|--------|--------|--------|------------|
| S_v | 1.0 | 1.1 | 1.4 | 1.8 | on request |

Start Factor S_z

| Starts per Hour | 30 | 60 | 120 | 240 | >240 |
|-----------------|-----|-----|-----|-----|------------|
| S_z | 1.0 | 1.1 | 1.2 | 1.3 | on request |

ACCORDING TO TORQUE

1. Calculate the drive torque T_{AN} .

$$T_{AN} \geq 9,550 \cdot \frac{P_{Drive}}{n} \quad (\text{Nm})$$

2. Base the coupling rated torque T_{KN} on the drive torque T_{AN} multiplied by the application factors.

$$T_{KN} \geq T_{AN} \cdot S_A \cdot S_v \cdot S_z$$

Example:

Coupling between an electric motor (P = 450 kW and n = 980 rpm) and a gearbox driving a belt conveyor for bulk materials.

$$T_{AN} = 9,550 \cdot \frac{450 \text{ kW}}{980 \text{ min}^{-1}} = 4,385.2 \text{ Nm}$$

smooth uniform load
= G : $S_A = 1.25$
ambient temperature
40°C : $S_v = 1.1$
starts
30/h : $S_z = 1.0$

$$T_{KN} \geq T_{AN} \cdot S_A \cdot S_v \cdot S_z$$

$$T_{KN} \geq 4,385.2 \text{ Nm} \cdot 1.25 \cdot 1.1 \cdot 1.0 = 6,029.7 \text{ Nm}$$

Selected coupling: ST2 / 10 with elastomer coupling $T_{KN} = 6,030 \text{ Nm}$

SIZING AND SELECTION

SAFETY COUPLINGS

ST

GEAR COUPLING DESIGN ST4

| Size | ST4 / 2 | ST4 / 5 | ST4 / 10 | ST4 / 25 | ST4 / 40 | ST4 / 60 | ST4 / 100 | ST4 / 160 | ST4 / 250 |
|---|---------|---------|----------|----------|----------|----------|-----------|-----------|-----------|
| T_{KN} Rated Torque (Nm) | 5,700 | 9,000 | 14,500 | 22,000 | 45,000 | 70,000 | 150,000 | 200,000 | 402,000 |
| T_{Kmax} Maximum Torque (Nm) | 14,000 | 21,500 | 35,000 | 54,000 | 110,000 | 170,000 | 360,000 | 480,000 | 804,000 |
| n Ref (max speed) (min. ⁻¹) | 4,000 | 3,900 | 3,700 | 3,550 | 2,750 | 2,420 | 1,950 | 1,730 | 990 |

ACCORDING TO TORQUE

1. Calculate the drive torque. T_{AN} .

$$T_{AN} \cong 9,550 \cdot \frac{P_{Drive}}{n} \quad (\text{Nm})$$

2. Base the coupling rated torque T_{KN} on the drive torque T_{AN} multiplied by the application factor. (see page 20 for shock or load factors S_A).

$$T_{KN} \geq T_{AN} \cdot S_A$$

Example:

Coupling between an electric motor (P = 800 kW and n = 980 rpm) and a gearbox driving a bucket chain excavator ($S_A = 2$).

$$T_{AN} = 9,550 \cdot \frac{800 \text{ kW}}{980 \text{ min.}^{-1}} = 7,796 \text{ Nm}$$

$$\begin{aligned} T_{KN} &\geq T_{AN} \cdot S_A \\ T_{KN} &\geq 7,796 \text{ Nm} \cdot 2 = 15,592 \text{ Nm} \end{aligned}$$

Selected coupling: ST4 / 25 with gear coupling $T_{KN} = 16,000 \text{ Nm}$

SIZING AND SELECTION

LP

DISC PACK COUPLINGS

SYMBOLS

- T_{KN} = Rated torque of the coupling (Nm)
 T_{AS} = Peak torque of the drive system
e.g. max. acceleration torque of drive (Nm)
or max. braking torque of load (Nm)
 J_L = Total load inertia (e.g. shaft + sprocket + chain + roller + 1/2 of coupling) (kgm²)
 J_A = Total driving inertia (motor [including gear ratio] + 1/2 of coupling) (kgm²)

| Shock or Load Factor S_A | | |
|--|------------------|---------------------|
| uniform load | non-uniform load | highly dynamic load |
| 1 | 2 | 3-4 |
| Common factor for servo drives in machine tools: $S_A = 2-3$ | | |

ACCORDING TO TORQUE

Couplings are normally sized for the highest torque to be regularly transmitted. The peak torque of the application should not exceed the rated torque of the coupling. The following calculation provides an approximation of the minimum required coupling size, and allows for the maximum rated speed and misalignment to exist in the application.

$$T_{KN} \cong 1.5 \cdot T_{AS} \text{ (Nm)}$$

ACCORDING TO ACCELERATION TORQUE

A more detailed calculation takes acceleration and the driving and driven moments of inertia into account. A strong inertia ratio diminishes the effect of the load factor in the sizing calculation.

$$T_{KN} \cong T_{AS} \cdot S_A \cdot \frac{J_L}{J_A + J_L} \text{ (Nm)}$$

GENERAL INFORMATION

GEAR COUPLING

GEAR COUPLING


BZ

FUNCTION OF THE GEAR COUPLING


The high precision gearing of the coupling compensates for lateral, angular, and axial misalignment. The gearing transmits torque with minimal backlash and a high degree

of torsional rigidity. The precise geometry of the gearing ensures the performance of the coupling.

Axial misalignment

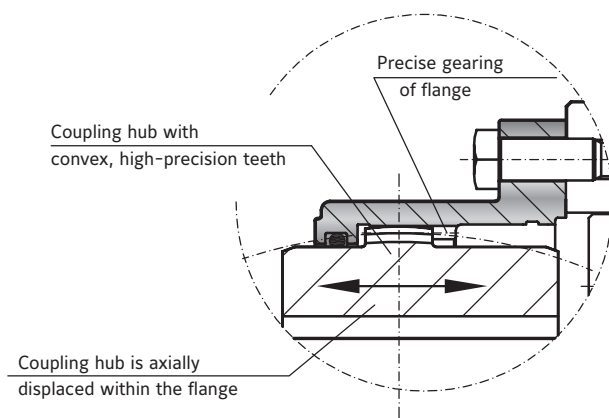

Angular and lateral misalignment

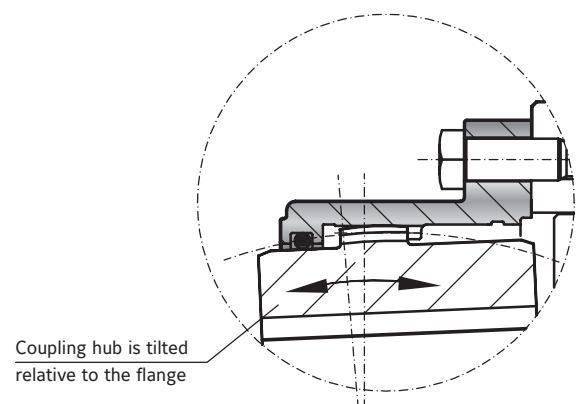


MAINTENANCE AND LUBRICATION

► **Note:** Lubrication of the gearing is very important to the service life of the coupling. An additional seal (optional) ensures the lubrication of the gearing over a long period of time.

Use only high performance grease

RECOMMENDED LUBRICANTS

| Normal speed | | High speed | |
|--------------|-------------------------------|------------|----------------------|
| Castrol | Impervia MDX | Caltex | Coupling Grease |
| Esso | Fibrax 370 | Klüber | Klüberplex GE 11-680 |
| Klüber | Klüberplex GE 11-680 | Mobil | Mobilgrease XTC |
| Mobil | Mobilux EPO | Shell | Albida GC1 |
| Shell | Alvania grease EP R-O or ER 1 | Texaco | Coupling Grease |
| Total | Specis EPG | | |

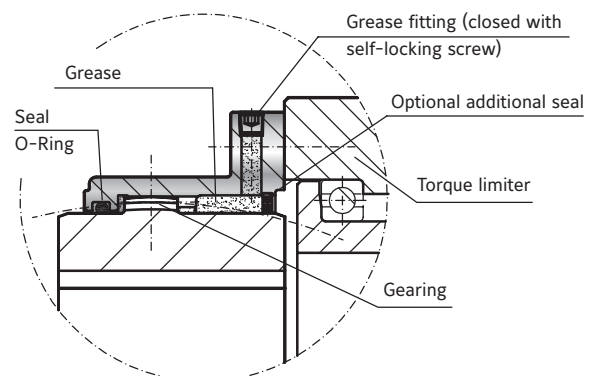

For easier handling, the coupling will be shipped unassembled.

GEAR COUPLINGS

SYMBOLS

- T_{KN} = Rated torque of the coupling (Nm)
 T_{AN} = Rated torque of the drive (Nm)
 S_A = Shock or load factor
 P = Drive power (kW)
 n = Rotational speed (rpm)

DESIGN FACTORS

Shock or Load Factor S_A

| Drive type | Load characteristics of driven machine | | |
|---|--|-----|-----|
| | G | M | S |
| electric motors, turbines, hydraulic motors | 1.25 | 1.6 | 2.0 |
| internal combustion engines ≥ 4 cylinder degree of uniformity $\geq 1:100$ | 1.5 | 2.2 | 2.5 |

G = smooth uniform load | M = moderate load | S = heavy shock load

LOAD FACTORS BY MACHINE TYPE

EXCAVATORS

- S bucket chain excavators
- S traveling gear (caterpillar)
- M traveling gear (rails)
- M suction pumps
- S bucket wheels
- M slewing gears

CONSTRUCTION MACHINERY

- M concrete mixers
- M road construction machinery

CHEMICAL INDUSTRY

- M mixers
- G agitators (light fluids)
- M dryer drums
- G centrifuges

FEEDERS AND CONVEYORS

- S belt conveyors
- G belt conveyors (bulk materials)
- M belt bucket conveyors
- M screw conveyors
- M circular conveyors
- M hoists

BLOWERS AND FANS¹⁾

- G blowers (axial/radial) $P:n \leq 0.007$
- M blowers (axial/radial) $P:n \leq 0.07$
- S blowers (axial/radial) $P:n > 0.07$
- G cooling tower fans $P:n \leq 0.007$
- M cooling tower fans $P:n \leq 0.07$
- S cooling tower fans $P:n > 0.07$

GENERATORS AND TRANSFORMERS

- S generators

RUBBER MACHINERY

- S extruders
- S calendars
- M mixers
- S rolling millse

WOOD PROCESSING MACHINERY

- G woodworking machines

CRANES

- S traveling gears
- S hoisting gears
- M slewing gears

PLASTICS MACHINERY

- M mixers
- M shredders

METALWORKING MACHINERY

- M sheet metal bending machines
- S plate straightening machines

- S presses

- M shears
- S punch presses
- M machine tools, main drives

FOOD PROCESSING MACHINERY

- G filling machines
- M kneading machines
- M cane crushers
- M cane cutters
- S cane mills
- M sugar beet cutters
- M sugar beet washers

PAPER MACHINERY

- S wood cutters
- S calendars
- S wet presses
- S suction presses
- S suction rollers
- S drying cylinders

PUMPS

- S piston pumps
- G centrifugal pumps (light fluids)
- S reciprocating pumps

STONE AND CLAY MACHINES

- S breakers

- S rotary kilns
- S hammer mills
- S brick presses

TEXTILE MACHINERY

- M tanning vats
- M willows
- M looms

COMPRESSORS

- S reciprocating compressors
- M centrifugal compressors

METAL ROLLING MILLS

- M plate tilters
- S ingot handling machinery
- M winding machines (strip and wire)
- S descaling machines
- S cold rolling mills
- M chain transfers
- M cross transfers
- M roller straighteners
- S tube welding machines
- S continuous casting plants
- M roller adjustment drives

LAUNDRY MACHINES

- M tumblers
- M washing machines

WASTEWATER TREATMENT PLANTS

- M aerators
- G screw pumps

¹⁾ P = power of drive in kW
n = speed of drive in rpm

ACCORDING TO TORQUE

1. Calculate the drive torque at speed T_{AN} .

$$T_{AN} \cong 9,550 \cdot \frac{P_{Drive}}{n} \text{ (Nm)}$$

2. Determine the required torque rating of the coupling T_{KN} based on the drive torque T_{AN} multiplied by the shock or load factor S_A (see page 20)

$$T_{KN} \geq T_{AN} \cdot S_A$$

Sample calculation:

Coupling between an electric motor ($P = 800 \text{ kW}$ at $n = 980 \text{ rpm}$) and a transmission, driving a screw conveyor ($S_A = 1.6$).

$$T_{AN} = 9,550 \cdot \frac{800 \text{ kW}}{980 \text{ min.}^{-1}} = 7,796 \text{ Nm}$$

$$\begin{aligned} T_{KN} &\geq T_{AN} \cdot S_A \\ T_{KN} &\geq 7,796 \text{ Nm} \cdot 1.6 = 12,473 \text{ Nm} \end{aligned}$$

SIZING AND SELECTION

BX

BELLOWS COUPLINGS

SYMBOLS

- T_{KN} = Rated torque of coupling (Nm)
 T_{AS} = Peak torque (Nm)
e.g. maximum acceleration peak torque or maximum braking torque from the load
 J_L = Moment of inertia of the load (load + drive line components + half of coupling) (kgm^2)
 J_A = Drive inertia (rotor of motor + drive line components + half of coupling) (kgm^2)
 C_T = Torsional stiffness of coupling (Nm/rad)
 f_e = Resonant frequency of the two mass system (Hz)
 f_{er} = Excitation frequency of the drive (Hz)
 φ = Angle of twist (degree)

| Shock or Load Factor S_A | | |
|--|------------------|------------------|
| uniform load | non-uniform load | heavy shock load |
| 1 | 2 | 3-4 |
| For many crushing and shredding applications load factors are commonly $S_A = 2-3$ | | |

ACCORDING TO TORQUE

Couplings are normally sized for the highest torque to be regularly transmitted. The peak torque of the application should not exceed the rated torque of the coupling. The following calculation provides an approximation of the minimum required coupling size, and allows for the maximum rated speed and misalignment to exist in the application.

$$T_{KN} \cong 1.5 \cdot T_{AS} \text{ (Nm)}$$

ACCORDING TO ACCELERATION TORQUE

A more detailed calculation takes acceleration and the driving and driven moments of inertia into account. A strong inertia ratio diminishes the effect of the load factor in the sizing calculation.

$$T_{KN} \cong T_{AS} \cdot S_A \cdot \frac{J_L}{J_A + J_L} \text{ (Nm)}$$


ACCORDING TO RESONANT FREQUENCY

The torsional natural frequency of the coupling must be significantly higher or lower than that of the equipment. For the mechanical substitution model the two mass system applies.

In practice the following applies: $f_e \geq 2 \cdot f_{er}$

$$f_e = \frac{1}{2 \cdot \pi} \sqrt{C_T \cdot \frac{J_A + J_L}{J_A \cdot J_L}} \text{ (Hz)}$$

Two Mass System

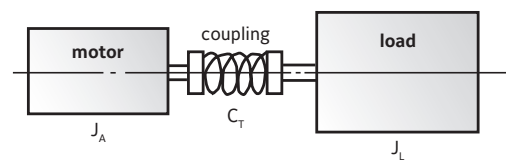

ACCORDING TO TORSIONAL DEFLECTION

To calculate transmission error as a result of torsional stress:

$$\varphi = \frac{180}{\pi} \cdot \frac{T_{AS}}{C_T} \text{ (degree)}$$

SIZING AND SELECTION

EK

ELASTIC JAW COUPLINGS

SYMBOLS

| | |
|---------------|---|
| T_{KN} | = Rated torque of the coupling (Nm) |
| T_{Kmax} | = Maximum torque rating of coupling (Nm) |
| T_S | = Peak torque applied to the coupling (Nm) |
| T_{AS} | = Peak torque of the drive system (Nm) |
| T_{AN} | = Nominal torque of the drive system (Nm) |
| T_{LN} | = Nominal torque of the load (Nm) |
| P | = Drive power (kW) |
| n | = Rotational speed (min. ⁻¹) |
| J_A | = Total driving inertia (kgm ²) (motor [including gear ratio] + 1/2 of coupling) |
| J_L | = Total load inertia (kgm ²) (load + drive line components + half of coupling) |
| J_1 | = Moment of inertia of driving coupling half (kgm ²) |
| J_2 | = Moment of inertia of driving coupling half (kgm ²) |
| m | = Ratio of the moment of inertia of the drive to the load |
| \mathcal{U} | = Temperature at the coupling (also consider radiant heat) |
| S_v | = Temperature factor |
| S_A | = Load factor |
| S_z | = Start factor (factor for the number of starts per hour) |
| Z_h | = Number of starts per hour (1/h) |

| Temperature factor S_v | A | B | E |
|--------------------------|---------|---------|---------|
| Temperature (v) | Sh 98 A | Sh 65 D | Sh 64 D |
| > -30°C to -10°C | 1.5 | 1.3 | 1.2 |
| > -10°C to +30°C | 1.0 | 1.0 | 1.0 |
| > +30°C to +40°C | 1.2 | 1.1 | 1.0 |
| > +40°C to +60°C | 1.4 | 1.3 | 1.2 |
| > +60°C to +80°C | 1.7 | 1.5 | 1.3 |
| > +80°C to +100°C | 2.0 | 1.8 | 1.6 |
| > +100°C to +120°C | - | 2.4 | 2.0 |
| > +120°C to +150°C | - | - | 2.8 |

| Start factor S_z | | | |
|--------------------|-----------|------------|------------|
| Z_h | up to 120 | 120 to 240 | over 240 |
| S_z | 1.0 | 1.3 | on request |

| Shock / load factor S_A | | | |
|---------------------------|--------------|------------------|------------------|
| | uniform load | non-uniform load | heavy shock load |
| | 1 | 1.8 | 2.5 |

COUPLING SELECTION FOR OPERATION WITHOUT SHOCK OR REVERSAL

The rated torque of the coupling (T_{KN}) must be greater than the rated torque of the load (T_{LN}), taking into account the temperature at the coupling (Temperature factor S_v). Should T_{LN} be unknown, T_{AN} can be used as a substitute in the formula.

Calculation

$$T_{KN} > T_{AN} \cdot S_v$$

Supplemental Calculation

$$T_{AN} = \frac{9,550 \cdot P}{n}$$

Sample calculation: (without shock loads)

Coupling conditions

$$v = 70^\circ \text{C}$$

$$S_v = 1.7 \text{ (for } 70^\circ \text{ Elastomer Type A)}$$

Drive for centrifugal pump

$$T_{AN} = 850 \text{ Nm}$$

Calculation: $T_{KN} > T_{AN} \cdot S_v$

$$T_{KN} > 850 \text{ Nm} \cdot 1.7$$

$$T_{KN} > \underline{1445 \text{ Nm}}$$

—————> **Result:** Coupling model EKH/2500/A ($T_{KN} = 1950 \text{ Nm}$) is selected.

COUPLING SELECTION FOR OPERATION WITH SHOCK LOADS

Same basic conditions as above. In addition, the maximum torque rating of the coupling (T_{Kmax}) is dictated by peak torque (T_s) due to shock loads.

Calculation

$$T_{KN} > T_{AN} \cdot S_v$$

Calculation

$$T_{Kmax} > T_s \cdot S_z \cdot S_v$$

Supplemental Calculation

$$T_{AN} = \frac{9,550 \cdot P}{n}$$

Supplemental Calculation

$$T_s = \frac{T_{AS} \cdot S_A}{m + 1}$$

$$m = \frac{J_A + J_1}{J_L + J_2}$$


SIZING AND SELECTION

EZ

ELASTOMER-DRIVE SHAFT COUPLINGS

SYMBOLS

- A = Overall length (mm)
AB = Distance between flextures (mm)
 $AB = (A - 2xN)$
Z = Tube length (mm)
 $Z = (A - 2xH)$
H = Length of coupling ends (mm)
N = Length to flexure (mm)
 T_{AS} = Peak torque of the drive (Nm)
 φ = Torsional deflection (degree)
 C_T^B = Torsional stiffness of both flexible elements (Nm/rad)
 C_T^{ZWR} = Torsional stiffness per 1m of tubing (Nm/rad)
 C_T^{ZA} = Total torsional stiffness (Nm/rad)
 n_k = Critical speed (1/min.)
 C_{Tdyn}^E = Dynamic torsional stiffness of both elastomer inserts (Nm/rad)
 C_{Tdyn}^{EZ} = Total torsional stiffness (Nm/rad)

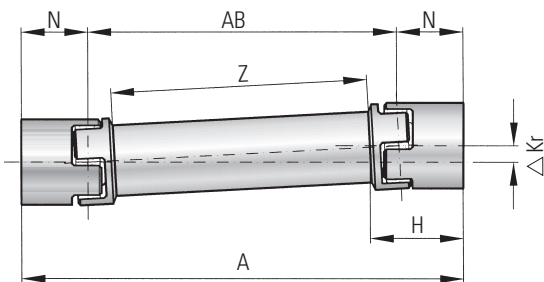

MODEL EZ

| Size | Torsional stiffness of both flexible elements | | Torsional stiffness per 1m of tubing | Length of coupling ends EZ | Length to flexure | Max. axial misalignment |
|------|---|--|--------------------------------------|----------------------------|-------------------|-------------------------|
| | Elastomer insert A C_T^B (Nm/rad) | Elastomer insert B C_T^B (Nm/rad) | C_T^{ZWR} (Nm/rad) | H (mm) | N (mm) | ΔK_a (mm) |
| 2500 | 87,500 | 108,000 | 1,000,000 | 142 | 108 | 5 |
| 4500 | 168,500 | 371,500 | 2,500,000 | 181 | 137 | 5 |
| 9500 | 590,000 | 670,000 | 5,000,000 | 229 | 171 | 6 |

Table 2

MAXIMUM TRANSMITTABLE TORQUE BY BORE DIAMETER (Nm)

| Size | Ø 35 | Ø 45 | Ø 50 | Ø 55 | Ø 60 | Ø 65 | Ø 70 | Ø 75 | Ø 80 | Ø 90 | Ø 120 | Ø 140 |
|------|------|------|------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| 2500 | 1900 | 2600 | 2900 | 3200 | 3500 | 3800 | 4000 | 4300 | 4600 | 5200 | | |
| 4500 | | 5300 | 5800 | 6300 | 7000 | 7600 | 8200 | 8800 | 9400 | 10600 | 14100 | |
| 9500 | | | 9200 | 10100 | 11100 | 11900 | 12800 | 13800 | 14800 | 16700 | 22000 | 25600 |

TEMPERATURE FACTOR S

| Temperature (°C) | A | B |
|------------------|---------|---------|
| | Sh 98 A | Sh 64 D |
| > -30° to -10° | 1.5 | 1.7 |
| > -10° to +30° | 1.0 | 1.0 |
| > +30° to +40° | 1.2 | 1.1 |
| > +40° to +60° | 1.4 | 1.3 |
| > +60° to +80° | 1.7 | 1.5 |
| > +80° to +100° | 2.0 | 1.8 |
| > +100° to +120° | - | 2.4 |

ACCORDING TO TORSIONAL STIFFNESS

Condition: Line shaft EZ2, Size 4500 $T_{AS} = 5,000\text{Nm}$
Wanted: Total torsional stiffness C_T^{ZA}

$$(C_T^{ZA}) = \frac{168,500 \text{ Nm/rad} \times (2,500,000 \text{ Nm/rad} / 1.344 \text{ m})}{168,500 \text{ Nm/rad} + (2,500,000 \text{ Nm/rad} / 1.344 \text{ m})} = 154504 \text{ [Nm/rad]}$$

$$(C_T^{ZA}) = \frac{C_T^B \cdot (C_T^{ZWR}/Z)}{C_T^B + (C_T^{ZWR}/Z)} \text{ (Nm/rad)}$$

ACCORDING TO TORSIONAL DEFLECTION

Condition: Line shaft EZ2, size 4500 $T_{AS} = 5,000 \text{ Nm}$
Wanted: Torsional deflection at maximum acceleration torque T_{AS}

Measurement (A) of line shaft = 1.706 m
 Length (Z) of tubing = $A - (2 \times H) = 1.344 \text{ m}$

$$\varphi = \frac{180 \times 5,000 \text{ Nm}}{\pi \times 154504 \text{ Nm/rad}} = 1,85^\circ$$

With a maximum torque of 5,000 Nm the torsional deflection is 1.85°

$$\varphi = \frac{180 \cdot T_{AS}}{\pi \cdot C_T^{ZA}} \text{ (degree)}$$

SIZING AND SELECTION

EZ

DRIVE SHAFT COUPLINGS

ACCORDING TO MAXIMUM MISALIGNMENT

Lateral misalignment ΔKr



$$\Delta Kr_{\max} = \tan \Delta \frac{Kw}{2} \cdot AB$$

$$AB = A - 2N$$

Angular misalignment ΔKw



$$\Delta Kw_{\max} = 2^\circ$$

Axial misalignment ΔKa



ΔKa See table
(Page 27)

R+W CALCULATION PROGRAM

Using proprietary software, R+W will calculate the specific mechanical details of exactly the model you plan to use. Overall length, tube materials (e.g. steel, aluminum, CFK), and other factors are used to determine a number of performance values unique to your line shaft coupling.

| | |
|-------------------------------|-----------------------------------|
| Critical speed | $n_k = 1/\text{min.}$ |
| Torsional stiffness of tubing | $C_T^{ZWR} = \text{Nm/rad}$ |
| Overall stiffness | $C_T^{ZA} = \text{Nm/rad}$ |
| Torsional deflection | $\varphi = \text{degree-min-sec}$ |
| Total Weight | $m = \text{kg}$ |
| Moment of inertia | $J = \text{kgm}^2$ |
| Maximum misalignment | $\Delta Kr = \text{mm}$ |

GENERAL INFORMATION

ELASTOMER SEGMENT ST2

ST2

ELASTIC SAFETY COUPLING

THE ELASTOMER SEGMENT


The compensating elements of the ST2 safety couplings are the elastomer segments. They transmit torque while damping vibration and compensating for lateral, axial

and angular misalignment. Three different versions are available with version A being supplied unless otherwise specified.


| Type | Relative damping (ψ) | Temperature range constant | Temperature range peak | Material | Shore hardness | Features |
|--------------|-----------------------------|----------------------------|------------------------|------------------------------|----------------|----------------------------------|
| A (Standard) | 1.0 | -40°C to +80°C | +90°C | Natural and synthetic rubber | 75-80 Shore A | Very high wear resistance |
| B | 1.0 | -40°C to +100°C | +120°C | Synthetic rubber | 73-78 Shore A | Resistant to many oils and fuels |
| C | 1.0 | -70°C to +120°C | +140°C | Silicone rubber | 70-75 Shore A | High temperature range |

► **Note**

Elastomer segments can be easily changed after installation. Every coupling utilizes 6x elastomer segments. The elastomer segments do not need to be installed prior to coupling mounting.

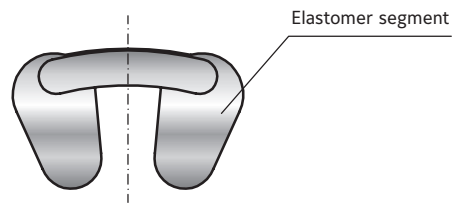

CHANGING THE ELASTOMER SEGMENTS

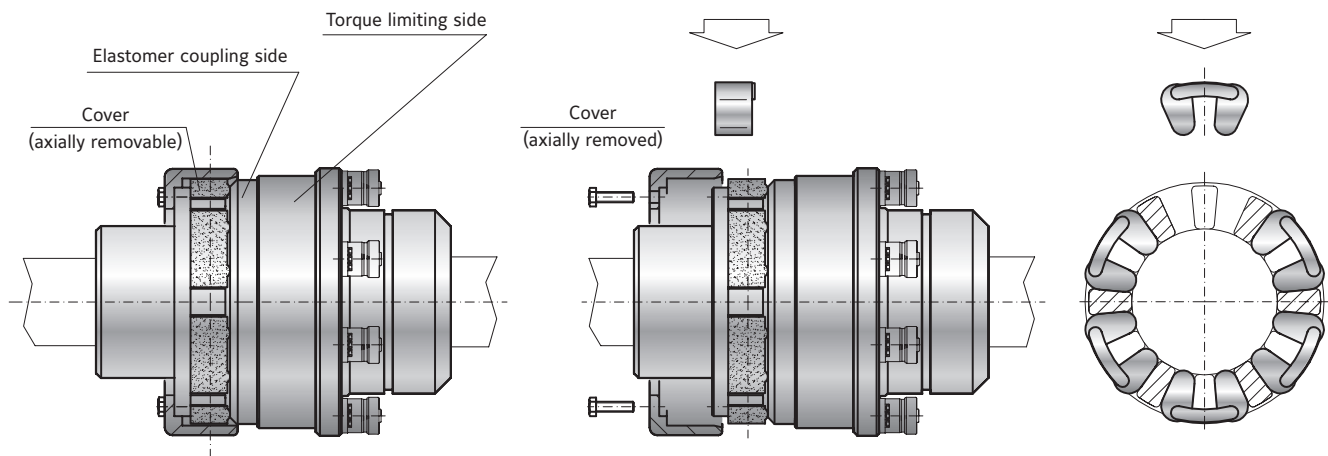

For easier handling, the coupling will be shipped unassembled.



INSTALLATION

SHAFT / AXIS MISALIGNMENT

Exact alignment of the shaft axes extends the service life of the coupling and adjacent components by minimizing reaction loads from misalignment.


INSTALLATION AND HANDLING INDUSTRIAL DRIVE COUPLINGS

INDIRECT DRIVES

SAFETY COUPLINGS


Drive attachments such as sprockets and universal joint shafts need to be centered on one of the precision locating features in the output flange of the coupling. In the case of sprockets, gears, sheaves, etc, the radial load should be centered between the two rows of ball bearings, integral to the coupling. In case this is not possible the overhung load can be supported by additional outboard bearings on the shaft. Make sure to observe the allowable size and radial load ratings for the safety couplings.

ST1

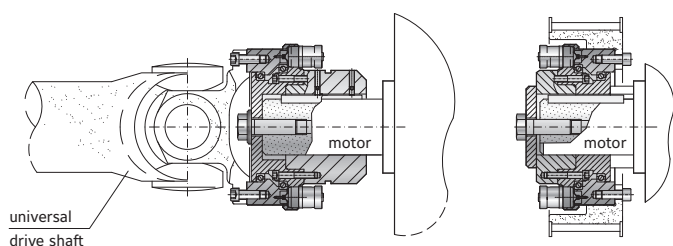


WITH KEYWAY MOUNTING

STR

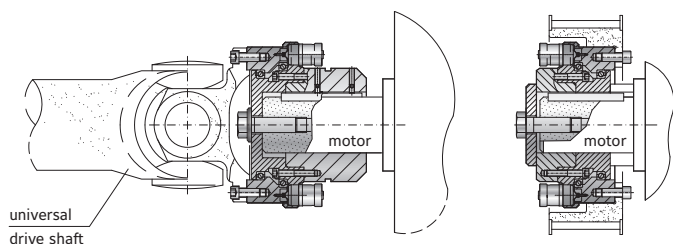


SPECIAL ROBUST VERSION

STN

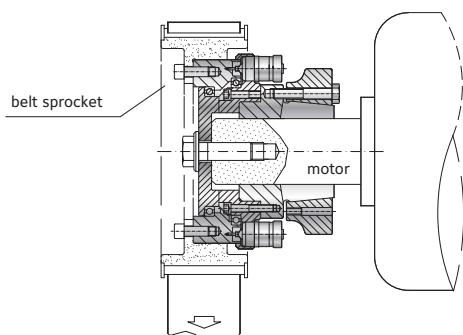

WITH CONICAL CLAMPING RINGS

STF




WITH FLANGE MOUNTING

DIRECT DRIVES

SAFETY COUPLINGS


Model ST safety couplings are designed for high torque. This is accomplished by means of the robust spring plunger safety elements, which are uniformly distributed around the face of the coupling body. These safety elements provide a spring loaded form fit connection between the input and output of the coupling system. Transmittable torque is determined by the quantity and force settings of the safety elements. At a predetermined maximum torque level, the balls of the safety elements exit the conical detents in the output flange of the coupling, and retract inside the housings of the safety elements. This creates a complete disconnection of the input and output of the coupling system. Re-engagement is performed by applying pressure to the back side of the safety elements, causing the balls to be released back into their detents. The coupling system is sealed to prevent dirt and debris from entering, and to prevent grease from escaping.

STE

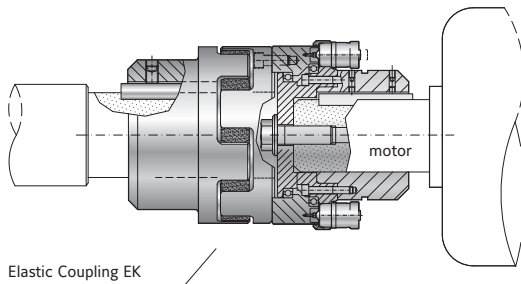


WITH KEYWAY MOUNTING
AND ELASTIC COUPLING

ST2

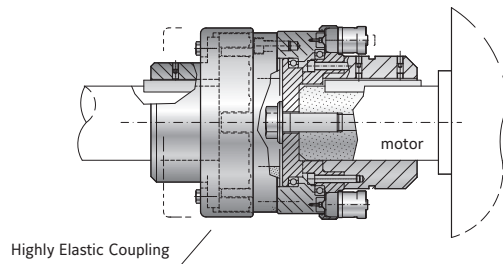

WITH KEYWAY MOUNTING AND
HIGHLY ELASTIC COUPLING

ST4

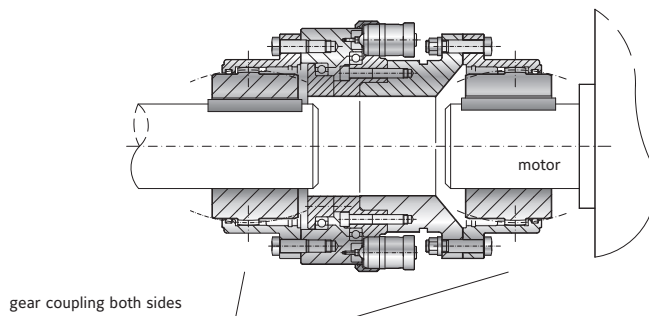

WITH KEYWAY MOUNTING
AND GEAR COUPLING


INSTALLATION AND HANDLING INDUSTRIAL DRIVE COUPLINGS

DIRECT DRIVES

DISC PACK COUPLINGS


R+W LP series couplings come with the disc packs fully assembled. They need only to be mounted to the hubs and spacers during installation. Once assembled the disc pack couplings compensate for axial, lateral, and angular shaft misalignment. Torque is transmitted across the disc packs purely by the frictional flanged connection created by the grade 12.9 bolts. This helps to avoid problems associated with backlash, stress concentration, and micro movements, while also making the coupling assembly more torsionally stiff.

LP1

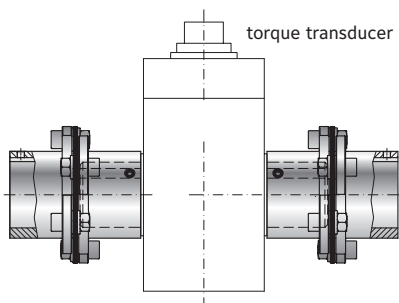

WITH KEYWAY MOUNTING AND
SINGLE FLEX FOR INTERMEDIATE
LOAD SUPPORT


LP2

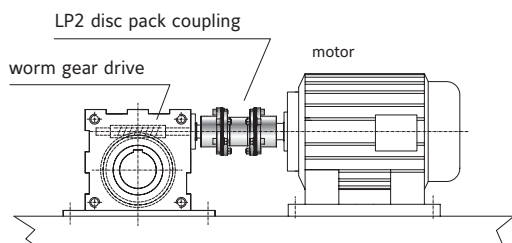

WITH KEYWAY MOUNTING AND
DOUBLE FLEX

LPA


LPAI

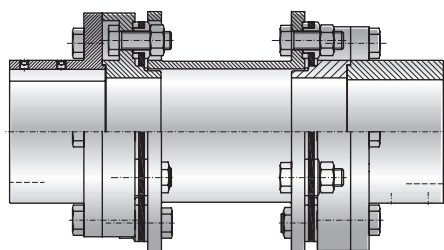

WITH KEYWAY MOUNTING
FOR API 610 / 671
METRIC OR IMPERIAL


DIRECT DRIVES

LP3

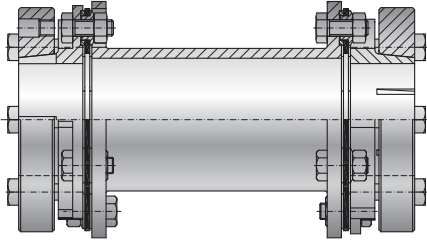


WITH CONICAL CLAMPING RING
AND DOUBLE FLEX

LP4



WITH CONICAL CLAMPING
RING AND SINGLE FLEX FOR
INTERMEDIATE LOAD SUPPORT

LPZ



INTERMEDIATE FLANGE
DOUBLE FLEX FOR USE WITH
VARIOUS END HUBS


INSTALLATION AND HANDLING INDUSTRIAL DRIVE COUPLINGS

DIRECT DRIVES

CROWNED GEAR COUPLINGS


The precise integration of the coupling hub and intermediate flange allow for low backlash and highly rigid torque transmission, while compensating for lateral, axial, and angular shaft misalignment. The crowned geometry of the gearing allows for a long life, even without the presence of misalignment.

BZ1

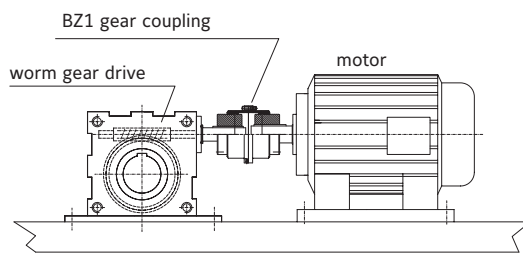

WITH KEYWAY MOUNTING
OR CYLINDRICAL BORE FOR
INTERFERENCE FIT

BZA

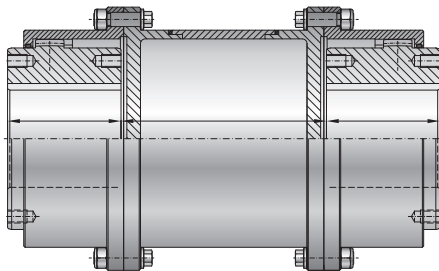


WITH INTERMEDIATE TUBE

DIRECT DRIVES

METAL BELLOWS COUPLINGS


R+W bellows couplings are flexible shaft couplings. The stainless steel bellows compensates for lateral, axial and angular shaft misalignment while transmitting torque with zero backlash and high torsional stiffness.

BX1

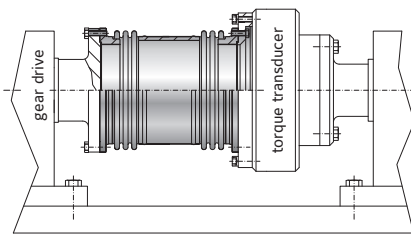


WITH FLANGE MOUNTING

BX4

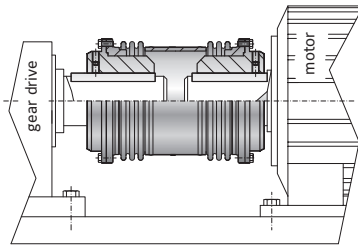

WITH KEYWAY MOUNTING

BX6

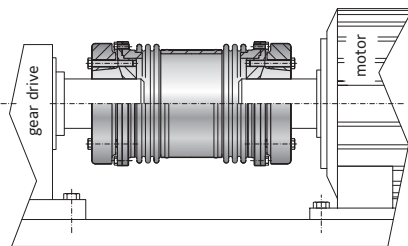

WITH CONICAL CLAMPING RINGS


INSTALLATION AND HANDLING INDUSTRIAL DRIVE COUPLINGS

DIRECT DRIVES

ELASTIC JAW COUPLINGS


R+W elastic jaw couplings are three piece flexible shaft couplings. The elastomer inserts are preloaded into the jaws, transmitting torque with zero backlash. The coupling system also compensates for lateral, axial, and angular shaft misalignment. The elastomer inserts are available in different hardness levels in order to allow for different characteristics in terms of damping, flexibility, and torsional stiffness.

EK1




WITH SIMPLE KEYWAY
MOUNTING

EKH



WITH FULLY SPLIT CLAMPING
HUBS

EK6




WITH CONICAL CLAMPING RINGS

ELASTIC DRIVE SHAFT SYSTEM

R+W drive shaft systems are flexible couplings for spanning larger distances between shaft ends. The elastomer inserts compensate for lateral, axial, and angular shaft misalignment. The preloaded elastic coupling system also absorbs vibration while transmitting torque with zero backlash.

EZ2

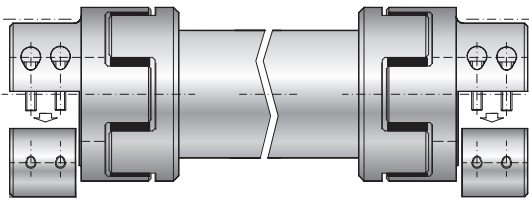

WITH FULLY SPLIT CLAMPING HUB
AND INTERMEDIATE TUBE





TORQSET® SAFETY COUPLINGS

200- 250,000 Nm



GENERAL INFORMATION ABOUT R+W SAFETY COUPLINGS:



FIT CLEARANCE

Overall shaft / hub clearance of 0.02 - 0.07 mm

TEMPERATURE RANGE

-30 to +120° C

SPECIAL SOLUTIONS

Automatic re-engagement

ATEX (Optional)





For use in hazardous areas available upon request.

DISENGAGEMENT BEHAVIOR

Full disengagement / manual reset is standard.



TORQSET® SAFETY COUPLINGS 200 – 250,000 Nm

| MODEL | | FEATURES | |
|------------|---|---|------------|
| ST1 |  | with simple keyway mounting for indirect drives from 200 - 250,000 Nm <ul style="list-style-type: none">▶ compact, simple design▶ precise overload protection▶ torsionally stiff▶ integral bearing for overhung load support | Page 44-45 |
| STR |  | with keyway mounting special robust version from 200 - 250,000 Nm <ul style="list-style-type: none">▶ compact, simple design▶ precise overload protection▶ torsionally stiff▶ with heavy duty bearing for overhung load support | Page 46-47 |
| STN |  | with conical clamping ring for indirect drives from 200 - 165,000 Nm <ul style="list-style-type: none">▶ high shaft clamping pressure▶ compact, simple design▶ precise overload protection▶ torsionally stiff▶ integral bearing for overhung load support | Page 48-49 |
| STF |  | with flange mounting both sides from 200 - 45,000 Nm <ul style="list-style-type: none">▶ compact design with customer specified interface for torque transducers and other mounting flanges▶ precise overload protection▶ torsionally stiff▶ with special bearing for high speeds | Page 50 |

MODEL

FEATURES

STE



with keyway mounting and elastomer coupling from 200 - 14,000 Nm

- ▶ vibration damping
- ▶ precise overload protection
- ▶ wear resistant
- ▶ press fit design

Page 51

ST2



with simple keyway mounting and elastic coupling from 200 - 165,000 Nm

- ▶ highly elastic damping
- ▶ compensation for misalignment
- ▶ precise overload protection
- ▶ elastomer segments resistant to oil and dirt
- ▶ press fit design

Page 52-53

ST4



with simple keyway mounting and crowned gear coupling from 200 - 250,000 Nm

- ▶ high power density
- ▶ compensation for misalignment
- ▶ precise overload protection
- ▶ low reaction loads on shaft bearings
- ▶ extremely wear resistant

Page 54-55

ST

Options / Special Solutions

Page 56

ACCESSORIES

Accessories for Safety Couplings

Page 59 - 63

ST1

WITH SIMPLE KEYWAY MOUNTING

200 - 45,000 Nm



PROPERTIES


MATERIAL
Hardened steel (nitrocarburized surface)

► Driven side: output flange with 12x fastening threads and integral bearings

DESIGN

► Drive side: coupling hub with keyway connection (spline profile on request)

► Safety elements: evenly spaced around the circumference; externally adjustable

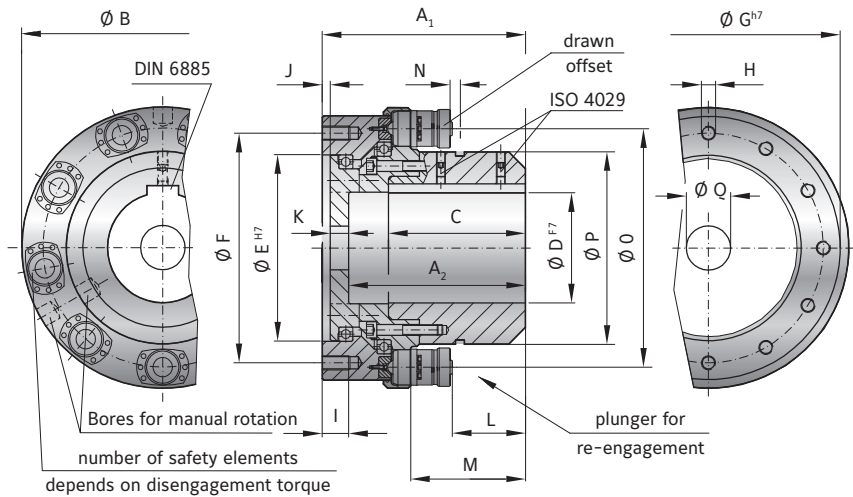

MODEL ST1 | SIZE 2 - 40

| SIZE | | 2 | | | 5 | | | 10 | | | 25 | | | 40 | | |
|--|----------------|-----------|---------|---------|-----------|--------|--------|------------|--------|--------|------------|--------|---------|------------|--------|--------|
| Adjustment range available from - to (KNm) | | 0.2-0.5 | 0.5-1.0 | 1.0-1.5 | 0.7-2 | 1.2-4 | 3.2-5 | 2-5 | 4-10 | 6-14 | 6-12 | 9-18 | 15-25 | 12-21 | 22-32 | 32-45 |
| | | 3×ST10 | 6×ST10 | 6×ST10 | 3×ST15 | 6×ST15 | 6×ST15 | 3×ST15 | 6×ST15 | 9×ST15 | 6×ST15 | 9×ST15 | 12×ST15 | 6×ST30 | 6×ST30 | 9×ST30 |
| Overall length (mm) | A ₁ | 120 | | | 150 | | | 183 | | | 230 | | | 305 | | |
| Bore depth (mm) | A ₂ | 100 | | | 124 | | | 158 | | | 200 | | | 210 | | |
| Outside diameter (mm) | B | 198 | | | 220 | | | 270 | | | 318 | | | 428 | | |
| Fit length (mm) | C | 100 | | | 121 | | | 120 | | | 155 | | | 210 | | |
| Bore diameter possible Ø to Ø F7 (mm) | D | 30-75 | | | 40-90 | | | 40-110 | | | 60-140 | | | 90-170 | | |
| Flange centering diameter H7 (mm) | E | 132 | | | 145 | | | 170 | | | 210 | | | 270 | | |
| Bolt circle diameter ±0.3 (mm) | F | 162 | | | 170 | | | 220 | | | 260 | | | 330 | | |
| Flange outside diameter h7 (mm) | G | 192 | | | 209 | | | 259 | | | 298 | | | 380 | | |
| Fastening threads | H | 12xM10 | | | 12xM12 | | | 12xM16 | | | 12xM16 | | | 12xM20 | | |
| Thread depth (mm) | I | 15 | | | 20 | | | 25 | | | 30 | | | 35 | | |
| Fit length (mm) | J | 3.5 | | | 4 | | | 6 | | | 8 | | | 8 | | |
| Wall thickness (mm) | K | 15 | | | 21 | | | 17 | | | 20 | | | 28 | | |
| Distance (mm) | L | 10.5 | | | 16.5 | | | 45 | | | 80 | | | 102 | | |
| Distance (mm) | M | 51.5 | | | 66.5 | | | 95 | | | 130 | | | 170 | | |
| Actuation path (mm) | N | 3.5 | | | 4.5 | | | 4 | | | 4 | | | 7.5 | | |
| Mounting diameter - elements (mm) | O | 154 | | | 171 | | | 220 | | | 270 | | | 350 | | |
| Hub outside diameter (mm) | P | 104 | | | 120 | | | 170 | | | 218 | | | 265 | | |
| Bore for fastening screw (mm) | Q | max. Ø 75 | | | max. Ø 90 | | | max. Ø 110 | | | max. Ø 140 | | | max. Ø 144 | | |
| Moment of inertia (approx.) D max. + max. sgmnt (10 ⁻³ kgm ²) | | 77 | | | 151 | | | 370 | | | 780 | | | 3570 | | |
| Speed max. (rpm) | | 7000 | | | 6000 | | | 4200 | | | 3800 | | | 3000 | | |
| Allowable max. radial force standard* (kN) | | 5 | | | 10 | | | 20 | | | 30 | | | 40 | | |
| Approx. weight at D max. + max. sgmnt (kg) | | 15 | | | 24 | | | 40 | | | 63 | | | 166 | | |

* larger radial loads possible with special bearings

ST1

WITH SIMPLE KEYWAY MOUNTING

11,000 - 250,000 Nm

PROPERTIES

MATERIAL


Hardened steel (nitrocarburized surface)

- ▶ Driven side: output flange with 12x fastening threads and integral bearings

DESIGN

- ▶ Drive side: coupling hub with keyway connection (spline profile on request)

- ▶ Safety elements: evenly spaced around the circumference; externally adjustable

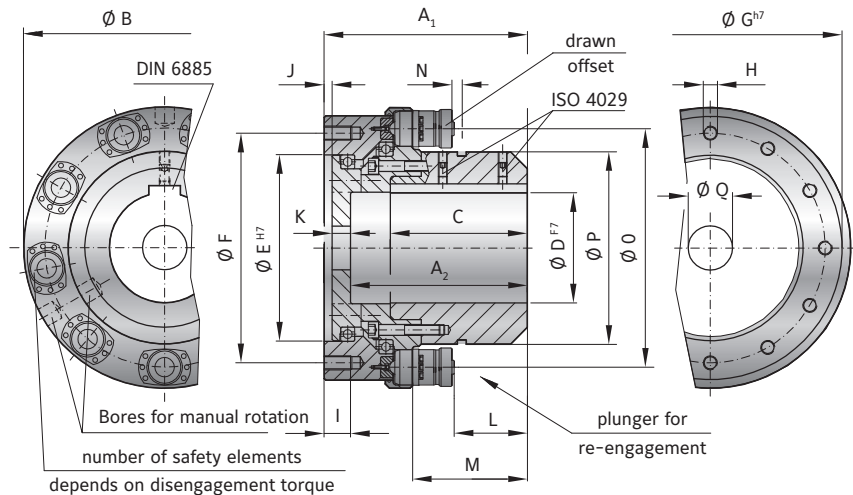

SAFETY COUPLINGS
ST

MODEL ST1 | SIZE 60 - 250

| SIZE | | 60 | | | 100 | | | 160 | | | 250 | |
|--|----------------|------------|---------|---------|------------|--------|--------|------------|--------|--------|------------|---------|
| Adjustment range available from - to (KNm) | | 11-18 | 22-36 | 30-55 | 24-50 | 45-90 | 80-110 | 25-55 | 50-110 | 80-165 | 100-170 | 160-250 |
| | | 3×ST 30 | 6×ST 30 | 9×ST 30 | 3×ST70 | 6×ST70 | 9×ST70 | 3×ST70 | 6×ST70 | 9×ST70 | 8×ST71 | 12×ST71 |
| Overall length (mm) | A ₁ | 320 | | | 396 | | | 410 | | | 534 | |
| Bore depth (mm) | A ₂ | 275 | | | 280 | | | 360 | | | 370 | |
| Outside diameter | B | 459 | | | 592 | | | 648 | | | 740 | |
| Fit length (mm) | C | 220 | | | 280 | | | 290 | | | 370 | |
| Bore diameter possible Ø to Ø F7 (mm) | D | 80-200 | | | 100-250 | | | 100-290 | | | 200-340 | |
| Flange centering diameter H7 (mm) | E | 300 | | | 390 | | | 450 | | | 508 | |
| Bolt circle diameter ±0.3 (mm) | F | 360 | | | 464 | | | 570 | | | 600 | |
| Flange outside diameter h7 (mm) | G | 418 | | | 530 | | | 618 | | | 680 | |
| Fastening threads | H | 12xM20 | | | 12xM24 | | | 12xM24 | | | 12xM36 | |
| Thread depth (mm) | I | 35 | | | 40 | | | 40 | | | 60 | |
| Fit length (mm) | J | 8 | | | 10 | | | 10 | | | 12 | |
| Wall thickness (mm) | K | 30 | | | 38 | | | 38 | | | 60 | |
| Distance (mm) | L | 99 | | | 128 | | | 135 | | | 135 | |
| Distance (mm) | M | 167 | | | 218 | | | 225 | | | 228 | |
| Actuation path (mm) | N | 7,5 | | | 10 | | | 10 | | | 10 | |
| Mounting diameter - elements (mm) | O | 376 | | | 490 | | | 532 | | | 630 | |
| Hub outside diameter (mm) | P | 295 | | | 380 | | | 418 | | | 508 | |
| Bore for fastening screw (mm) | Q | max. Ø 200 | | | max. Ø 216 | | | max. Ø 290 | | | max. Ø 290 | |
| Moment of inertia (approx.) D max. + max. sgmnt (10 ⁻³ kgm ²) | | 4600 | | | 16850 | | | 24600 | | | 56800 | |
| Speed max. (rpm) | | 2500 | | | 2200 | | | 2000 | | | 1200 | |
| Allowable max. radial force standard* (KN) | | 50 | | | 60 | | | 100 | | | 120 | |
| Approx. weight at D max. + max. sgmnt (kg) | | 179 | | | 403 | | | 463 | | | 850 | |

* larger radial loads possible with special bearings

STR

WITH SIMPLE KEYWAY MOUNTING, ROBUST 200 - 45,000 Nm



NEW

PROPERTIES

MATERIAL


Hardened steel (nitrocarburized surface)

DESIGN

► Drive side: coupling hub with keyway connection (spline profile on request)

► Driven side: Output flange with attachment threads and reinforced bearings.

► Safety elements: evenly spaced around the circumference; externally adjustable

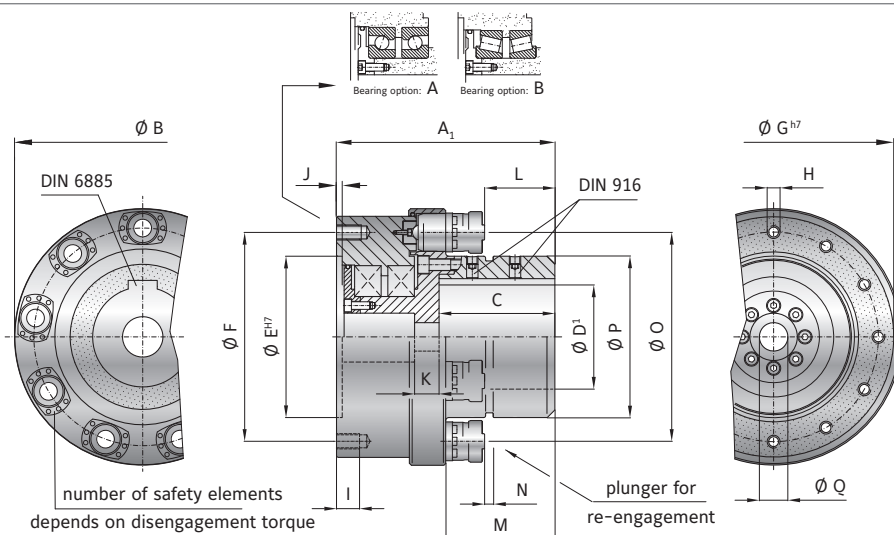

MODEL STR | SIZE 2 - 40

| SIZE | | 2 | | 4 | | 5 | | 10 | | 25 | | 40 | | | | | | | | | |
|--|----------------|-----------|---------|-----------|---------|-----------|---------|-----------|---------|-----------|---------|-----------|---------|---------|---------|---------|---------|----------|---------|---------|---------|
| Adjustment range available from - to (KNm) | | 0.2-0.5 | 0.5-1.0 | 1.0-1.5 | 1.5-3.5 | 0.6-0.9 | 1.1-1.7 | 1.6-2.6 | 2.5-5.0 | 0.7-2 | 1.2-4 | 3.2-5 | 2-5 | 4-10 | 6-14 | 6-12 | 9-18 | 15-25 | 12-21 | 22-32 | 32-45 |
| | | 3× ST11 | 6× ST11 | 6× ST11 | 6× ST11 | 3× ST11 | 6× ST11 | 9× ST11 | 9× ST11 | 3× ST16 | 6× ST16 | 6× ST16 | 3× ST16 | 6× ST16 | 9× ST16 | 6× ST16 | 9× ST16 | 12× ST16 | 6× ST31 | 6× ST31 | 6× ST31 |
| Overall length (mm) | A ₁ | 170 | | 198 | | 190 | | 230 | | 264 | | 335 | | | | | | | | | |
| Outside diameter (mm) | B | 198 | | 211 | | 220 | | 270 | | 318 | | 428 | | | | | | | | | |
| Fit length (mm) | C | 95 | | 120 | | 111 | | 122 | | 150 | | 191 | | | | | | | | | |
| Bore diameter possible Ø to Ø F7(mm) | D | 30-80 | | 40-100 | | 40-90 | | 40-110 | | 60-140 | | 90-170 | | | | | | | | | |
| Flange centering diameter H7 (mm) | E | 132 | | 136 | | 145 | | 170 | | 210 | | 270 | | | | | | | | | |
| Bolt circle diameter ±0.3 (mm) | F | 162 | | 164 | | 170 | | 220 | | 260 | | 330 | | | | | | | | | |
| Flange outside diameter h7 (mm) | G | 192 | | 194 | | 209 | | 259 | | 298 | | 380 | | | | | | | | | |
| Fastening threads (mm) | H | 12xM10 | | 12xM12 | | 12xM12 | | 12xM16 | | 12xM16 | | 12xM20 | | | | | | | | | |
| Thread depth (mm) | I | 18 | | 22 | | 22 | | 28 | | 30 | | 36 | | | | | | | | | |
| Fit length (mm) | J | 4.5 | | 3.5 | | 3.5 | | 6 | | 8 | | 6 | | | | | | | | | |
| Wall thickness (mm) | K | 16 | | 20 | | 24 | | 32 | | 32 | | 48 | | | | | | | | | |
| Distance (mm) | L | 50.0 | | 81.5 | | 56.0 | | 74 | | 97 | | 111 | | | | | | | | | |
| Distance (mm) | M | 81.0 | | 112.5 | | 96.5 | | 115 | | 138 | | 171 | | | | | | | | | |
| Actuation path (mm) | N | 3.5 | | 3.5 | | 4.5 | | 4.5 | | 4.5 | | 7.5 | | | | | | | | | |
| Mounting diameter - elements (mm) | O | 154 | | 174 | | 171 | | 220 | | 270 | | 350 | | | | | | | | | |
| Hub outside diameter (mm) | P | 112 | | 138 | | 122 | | 170 | | 218 | | 265 | | | | | | | | | |
| Bore for fastening screw (mm) | Q | max. Ø 17 | | max. Ø 22 | | max. Ø 25 | | max. Ø 26 | | max. Ø 32 | | max. Ø 38 | | | | | | | | | |
| Moment of inertia (approx.) D max. + max. sgmnt (10 ⁻³ kgm ²) | | 103 | | 130 | | 168 | | 484 | | 1028 | | 4107 | | | | | | | | | |
| Speed max. (rpm) | | 8500 | | 6800 | | 6300 | | 5000 | | 4000 | | 3600 | | | | | | | | | |
| Allowable max. radial force standard* (kN) | | 10 | | 14 | | 20 | | 40 | | 60 | | 80 | | | | | | | | | |
| Approx. weight at D max. + max. sgmnt (kg) | | 21 | | 25 | | 28 | | 55 | | 86 | | 196 | | | | | | | | | |

* larger radial loads possible with special bearings

STR

WITH SIMPLE KEYWAY MOUNTING, ROBUST

11,000 - 250,000 Nm

**NEW**

PROPERTIES

MATERIAL


Hardened steel (nitrocarburized surface)

DESIGN

► Drive side: coupling hub with keyway connection (spline profile on request)

► Driven side: Output flange with attachment threads and reinforced bearings.

► Safety elements: evenly spaced around the circumference; externally adjustable

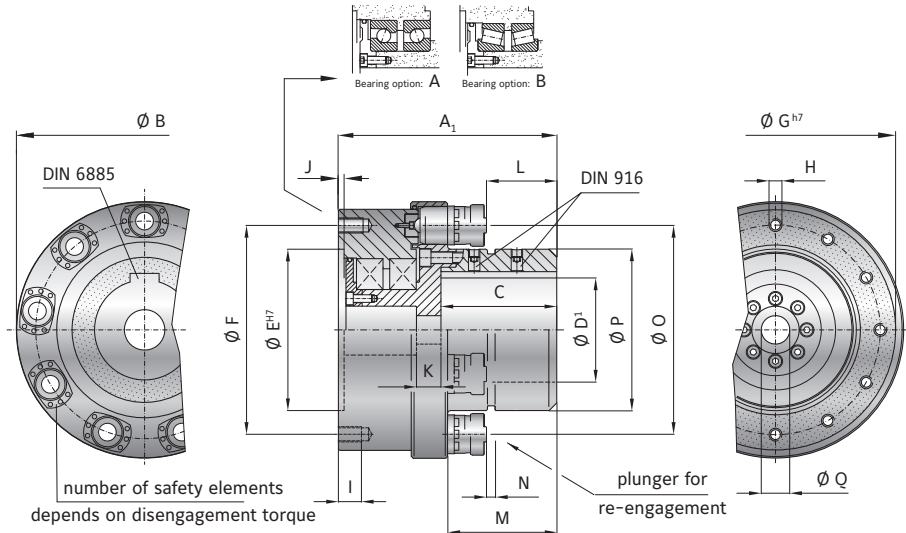

SAFETY COUPLINGS
ST

MODEL STR | SIZE 60 - 250

| SIZE | | 60 | | | 100 | | | 160 | | | 250 | |
|---|----------------|-----------|--------|--------|-----------|--------|--------|-----------|--------|--------|-----------|---------|
| Adjustment range available from - to (KNm) | | 11-18 | 22-36 | 30-55 | 24-50 | 45-90 | 80-110 | 25-55 | 50-110 | 80-165 | 100-170 | 160-250 |
| | | 3×ST31 | 6×ST31 | 9×ST31 | 3×ST71 | 6×ST71 | 9×ST71 | 3×ST71 | 6×ST71 | 9×ST71 | 8×ST71 | 12×ST71 |
| Overall length (mm) | A ₁ | 380 | | | 470 | | | 490 | | | 600 | |
| Outside diameter (mm) | B | 459 | | | 592 | | | 648 | | | 740 | |
| Fit length (mm) | C | 220 | | | 275 | | | 282 | | | 361 | |
| Bore diameter possible Ø to Ø F7(mm) | D | 80-200 | | | 100-250 | | | 130-290 | | | 200-340 | |
| Flange centering diameter H7 (mm) | E | 300 | | | 390 | | | 450 | | | 508 | |
| Bolt circle diameter ±0.3 (mm) | F | 360 | | | 464 | | | 570 | | | 600 | |
| Flange outside diameter h7 (mm) | G | 418 | | | 530 | | | 618 | | | 680 | |
| Fastening threads (mm) | H | 12xM20 | | | 12xM24 | | | 12xM24 | | | 12xM36 | |
| Thread depth (mm) | I | 36 | | | 40 | | | 44 | | | 60 | |
| Fit length (mm) | J | 9 | | | 10 | | | 11 | | | 12 | |
| Wall thickness (mm) | K | 53.5 | | | 67.0 | | | 67.0 | | | 78.0 | |
| Distance (mm) | L | 143 | | | 179 | | | 189 | | | 273 | |
| Distance (mm) | M | 202.5 | | | 255 | | | 265 | | | 349 | |
| Actuation path (mm) | N | 7.5 | | | 10 | | | 10 | | | 10 | |
| Mounting diameter - elements (mm) | O | 376 | | | 490 | | | 532 | | | 630 | |
| Hub outside diameter (mm) | P | 295 | | | 380 | | | 420 | | | 508 | |
| Bore for fastening screw (mm) | Q | max. Ø 44 | | | max. Ø 44 | | | max. Ø 52 | | | max. Ø 52 | |
| Moment of inertia (approx.) D max. + max. sgmnt (10 ⁻³ kgm ²) | | 5925 | | | 20000 | | | 31830 | | | 61300 | |
| Speed max. (rpm) | | 3200 | | | 2200 | | | 2000 | | | 1800 | |
| Allowable max. radial force standard* (KN) | | 100 | | | 130 | | | 200 | | | 240 | |
| Approx. weight at D max. + max. sgmnt (kg) | | 244 | | | 502 | | | 636 | | | 978 | |

* larger radial loads possible with special bearings



PROPERTIES

MATERIAL


Hardened steel (nitrocarburized surface)

DESIGN

► Drive side: coupling hub with conical clamping bushing connection (spline profile on request)

► Driven side: output flange with 12x fastening threads and integral bearings

► Safety elements: evenly spaced around the circumference; externally adjustable

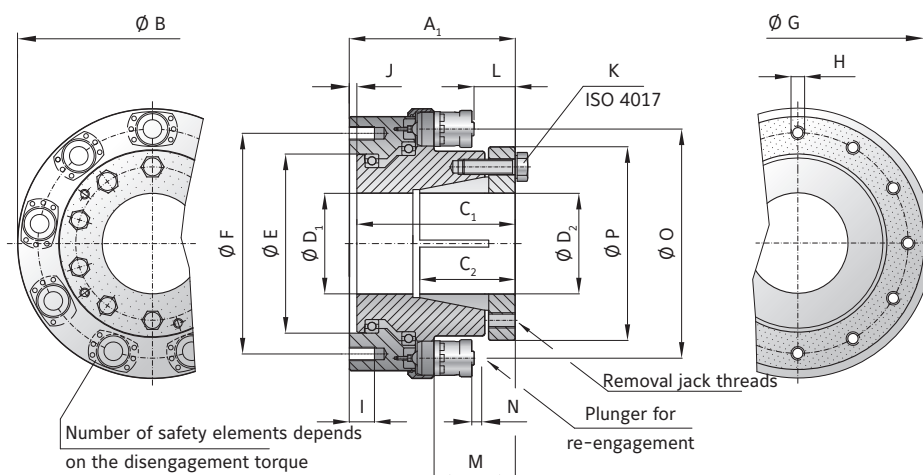

MODEL STN | SIZE 2 - 5

| SIZE | | 2 | | | 5 | | | |
|--|--------------------------------------|----------------|---------|---------|---------|--------|--------|--------|
| Adjustment range available from - to | (KNm) | | 0.2-0.5 | 0.5-1.0 | 1.0-1.5 | 0.7-2 | 1.2-4 | 3.2-5 |
| | | | 3×ST10 | 6×ST10 | 6×ST10 | 3×ST15 | 6×ST15 | 6×ST15 |
| Overall length | (mm) | A ₁ | 124.5 | | | 160 | | |
| Flange outside diameter | (mm) | B | 198 | | | 220 | | |
| Fit length / keyway length | (mm) | C ₁ | 118 | | | 155 | | |
| Effective clamping length | (mm) | C ₂ | 45 | | | 82 | | |
| Bore diameter possible Ø to Ø F7 | (mm) | D ₂ | 45-70 | | | 40-80 | | |
| Bore diameter max. Ø F7 with keyway | (mm) | D ₂ | 60 | | | 70 | | |
| Flange centering diameter H7 | (mm) | E | 132 | | | 145 | | |
| Bolt circle diameter ±0.3 | (mm) | F | 162 | | | 170 | | |
| Outside diameter h7 | (mm) | G | 192 | | | 209 | | |
| Fastening threads | (mm) | H | 12×M10 | | | 12×M12 | | |
| Thread depth | (mm) | I | 15 | | | 20 | | |
| Fit length | (mm) | J | 3 | | | 4 | | |
| Tightening screw ISO 4017 | | K | 6×M10 | | | 6×M10 | | |
| Tightening torque | (Nm) | K | 59 | | | 59 | | |
| Distance | (mm) | L | 18 | | | 26.5 | | |
| Distance | (mm) | M | 56 | | | 76.5 | | |
| Actuation path | (mm) | N | 3.5 | | | 4.5 | | |
| Mounting diameter - elements | (mm) | O | 154 | | | 170 | | |
| Hub outside diameter | (mm) | P | 119 | | | 136 | | |
| Moment of inertia (approx.) D max. + max. sgmnt | (10 ⁻³ kgm ²) | | 77 | | | 151 | | |
| Speed max. | (rpm) | | 7000 | | | 6000 | | |
| Allowable max. radial force standard* | (KN) | | 5 | | | 10 | | |
| Approx. weight at D max. + max. sgmnt | (kg) | | 15 | | | 24 | | |

* larger radial loads possible with special bearings



PROPERTIES

MATERIAL


Hardened steel (nitrocarburized surface)

► Driven side: output flange with 12x fastening threads and integral bearings

DESIGN

► Drive side: coupling hub with conical clamping ring connection (spline profile on request)

► Safety elements: evenly spaced around the circumference; externally adjustable

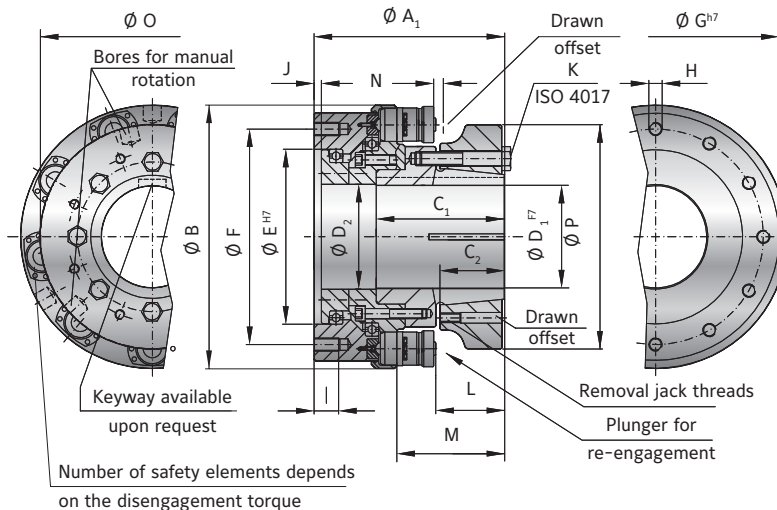

MODEL STN | SIZE 10 - 160

| SIZE | | 10 | | | 25 | | | 40 | | | 60 | | | 160 | | |
|--|----------------|--------|--------|--------|--------|--------|---------|---------|--------|--------|--------|--------|--------|---------|--------|--------|
| Adjustment range available from - to (KNm) | | 2-5 | 4-10 | 6-14 | 6-12 | 9-18 | 15-25 | 12-21 | 22-32 | 32-45 | 11-18 | 22-36 | 30-55 | 25-55 | 50-110 | 80-165 |
| | | 3xST15 | 6xST15 | 9xST15 | 6xST15 | 9xST15 | 12xST15 | 6xST30 | 6xST30 | 9xST30 | 3xST30 | 6xST30 | 9xST30 | 3xST70 | 6xST70 | 9xST70 |
| Overall length (mm) | A ₁ | 210 | | | 227 | | | 286 | | | 318 | | | 425 | | |
| Flange outside diameter (mm) | B | 270 | | | 318 | | | 428 | | | 459 | | | 648 | | |
| Fit length / keyway length (mm) | C ₁ | 147 | | | 152 | | | 191 | | | 218 | | | 305 | | |
| Effective clamping length (mm) | C ₂ | 62 | | | 67 | | | 93.5 | | | 93 | | | 125 | | |
| Bore diameter possible Ø to Ø F7 (mm) | D ₁ | 65-110 | | | 70-150 | | | 110-170 | | | 80-200 | | | 140-290 | | |
| Bore diameter max. Ø F7 with keyway (mm) | D ₁ | 100 | | | 140 | | | 160 | | | 180 | | | 270 | | |
| Flange centering diameter H7 (mm) | E | 170 | | | 210 | | | 270 | | | 300 | | | 450 | | |
| Bolt circle diameter ±0.3 (mm) | F | 220 | | | 260 | | | 330 | | | 360 | | | 570 | | |
| Outside diameter h7 (mm) | G | 259 | | | 298 | | | 380 | | | 418 | | | 618 | | |
| Fastening threads (mm) | H | 12xM16 | | | 12xM16 | | | 12xM20 | | | 12xM20 | | | 12xM24 | | |
| Thread depth (mm) | I | 25 | | | 30 | | | 36 | | | 35 | | | 40 | | |
| Fit length (mm) | J | 6 | | | 8 | | | 9 | | | 8 | | | 11 | | |
| Tightening screw ISO 4017 | K | 8xM16 | | | 9xM16 | | | 11xM16 | | | 8xM20 | | | 8xM24 | | |
| Tightening torque (Nm) | | 180 | | | 180 | | | 180 | | | 570 | | | 710 | | |
| Distance (mm) | L | 72 | | | 80 | | | 82.5 | | | 94 | | | 151 | | |
| Distance (mm) | M | 122 | | | 127 | | | 151 | | | 163 | | | 240 | | |
| Actuation path (mm) | N | 4 | | | 4 | | | 8 | | | 7.5 | | | 10 | | |
| Mounting diameter - elements (mm) | O | 220 | | | 270 | | | 350 | | | 376 | | | 532 | | |
| Hub outside diameter (mm) | P | 218 | | | 278 | | | 322 | | | 378 | | | 535 | | |
| Moment of inertia (approx.) D max. + max. sgmnt (10 ⁻³ kgm ²) | | 446 | | | 789 | | | 3570 | | | 5700 | | | 30700 | | |
| Speed max. (rpm) | | 4200 | | | 3800 | | | 3000 | | | 2500 | | | 2000 | | |
| Allowable max. radial force standard* (KN) | | 20 | | | 30 | | | 40 | | | 50 | | | 100 | | |
| Approx. weight at D max. + max. sgmnt (kg) | | 50 | | | 65 | | | 166 | | | 200 | | | 550 | | |

* larger radial loads possible with special bearings

STF

WITH FLANGE MOUNTING

200 - 45,000 Nm



NEW

PROPERTIES


MATERIAL

Hardened steel (nitrocarburized surface)

DESIGN

► Drive side: Coupling hub with flange mounting

- Driven side: Mounting flange with fastening threads and integral bearing
- Safety elements: evenly spaced around the circumference; externally adjustable

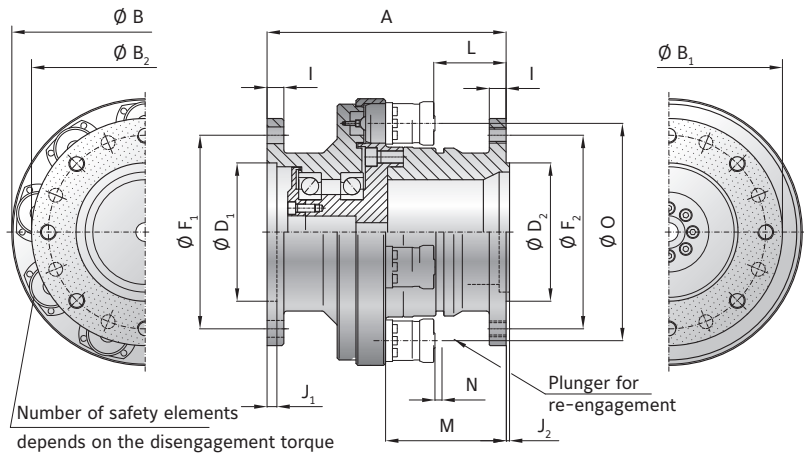

MODEL STF | SIZE 2 - 40

| SIZE | | 2 | | | 5 | | | 10 | | | 25 | | | 40 | | |
|--|--------------------------------------|----------------|---------|---------|--------|--------|--------|--------|--------|--------|--------|--------|---------|--------|--------|--------|
| Adjustment range available from to | (KNm) | 0.2-0.5 | 0.5-1.0 | 1.0-1.5 | 0.7-2 | 1.2-4 | 3.2-5 | 2-5 | 4-10 | 6-14 | 6-12 | 9-18 | 15-25 | 12-21 | 22-32 | 32-45 |
| | | 3×ST10 | 6×ST10 | 6×ST10 | 3×ST15 | 6×ST15 | 6×ST15 | 3×ST15 | 6×ST15 | 9×ST15 | 6×ST15 | 9×ST15 | 12×ST15 | 3×ST31 | 6×ST31 | 9×ST31 |
| Overall length | (mm) | A | | 190 | 230 | | 250 | | 280 | | 320 | | | | | |
| Major outside diameter | (mm) | B | | 198 | 220 | | 270 | | 318 | | 428 | | | | | |
| Flange outside diameter | (mm) | B ₁ | | 170 | 188 | | 230 | | 268 | | 340 | | | | | |
| Flange outside diameter | (mm) | B ₂ | | 170 | 188 | | 230 | | 306 | | 390 | | | | | |
| Flange centering diameter H7 | (mm) | D ₁ | | 90 | 110 | | 140 | | 174 | | 210 | | | | | |
| Flange centering diameter h7 | (mm) | D ₂ | | 90 | 110 | | 140 | | 200 | | 210 | | | | | |
| Hole circle diameter | (mm) | F ₁ | | 130 | 155.5 | | 196 | | 220 | | 304 | | | | | |
| Through hole diameter | (mm) | F ₁ | | 8×Ø13 | 8×Ø15 | | 8×Ø17 | | 12×Ø19 | | 16×Ø22 | | | | | |
| Bolt circle diameter | (mm) | F ₂ | | 130 | 155.5 | | 196 | | 270 | | 350 | | | | | |
| Thread size | (mm) | F ₂ | | 8×M12 | 8×M14 | | 8×M16 | | 12×M18 | | 16×M20 | | | | | |
| Flange thickness | (mm) | I | | 14 | 17.5 | | 20 | | 22 | | 25 | | | | | |
| Fit length | (mm) | J ₁ | | 3 | 4 | | 5 | | 5 | | 6 | | | | | |
| Fit length | (mm) | J ₂ | | 2.5 | 3 | | 3.5 | | 4 | | 4 | | | | | |
| Distance | (mm) | L | | 45 | 63.5 | | 75 | | 83.5 | | 105.5 | | | | | |
| Distance | (mm) | M | | 83 | 113.5 | | 125 | | 124.5 | | 165 | | | | | |
| Actuation path | (mm) | N | | 3.5 | 4.5 | | 4.5 | | 4.5 | | 7.5 | | | | | |
| Moment of inertia (approx.) D max. + max. sgmnt | (10 ⁻³ kgm ²) | J.kst | | 83 | 150 | | 380 | | 830 | | 3300 | | | | | |
| Speed max. | (rpm) | | | 9000 | 7500 | | 6300 | | 5000 | | 3600 | | | | | |
| Allowable max. radial force standard* | (KN) | | | 7 | 12 | | 17 | | 22 | | 30 | | | | | |
| Approx. weight at D max. + max. sgmnt | (kg) | m.kst | | 20 | 30.4 | | 50.3 | | 73 | | 180 | | | | | |

* larger radial loads possible with special bearings



NEW: ATEX


PROPERTIES

MATERIAL

- ▶ **Clutch segment:** hardened steel (nitrocarburized surface)
- ▶ **Elastomer segment:** TPU in various Shore hardnesses
- ▶ **Jaw coupling segments:** GGG40

DESIGN

- ▶ Drive side: coupling hub with simple keyway mounting
- ▶ Driven side: coupling hub with simple keyway mounting and elastomer segments
- ▶ Safety elements: evenly spaced around the circumference; externally adjustable

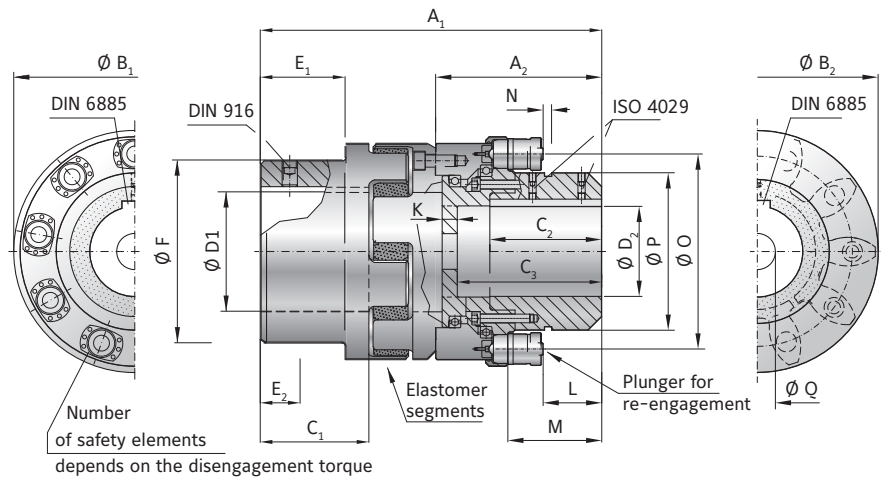

MODEL STE | SIZE 2 - 10

| SIZE | | 2 | | | 4 | | | 5 | | | 10 | | |
|---|----------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-----------------|-----------------|-----------------|---------------|----------------|----------------|
| Adjustment range available from to (KNm) | | 0.2-0.5 3×ST11 | 0.5-1.0 6×ST11 | 1.0-1.5 6×ST11 | 0.6-0.9 3×ST11 | 1.1-1.7 6×ST11 | 1.6-2.6 9×ST11 | 0.7-2 3×ST16 | 1.2-4 6×ST16 | 3.2-5 6×ST16 | 2-5 3×ST16 | 4-10 6×ST16 | 6-14 9×ST16 |
| Elastomer coupling size | | 2500 | | | 2500 | | | 4500 | | | 9500 | | |
| Elastomer insert type | | A / B / D | | | A / B / D | | | A / B / D | | | A / B / D | | |
| Overall length ±2 (mm) | A ₁ | 312 | | | 360 | | | 373 | | | 460 | | |
| Length of torque limiting portion (mm) | A ₂ | 170 | | | 198 | | | 190 | | | 230 | | |
| Flange outside diameter (ST portion) (mm) | B ₁ | 198 | | | 211 | | | 220 | | | 270 | | |
| Flange outside diameter (elastomer portion) (mm) | B ₂ | 160 | | | 160 | | | 225 | | | 290 | | |
| Fit length/keyway length D1 (mm) | C ₁ | 88 | | | 88 | | | 113 | | | 142 | | |
| Fit length/keyway length D2 (mm) | C ₂ | 85 | | | 120 | | | 100 | | | 122 | | |
| Bore depth (torque limiting portion) (mm) | C ₃ | 95 | | | 120 | | | 111 | | | 122 | | |
| Bore diameter (elastomer portion) Ø - Ø F7 (mm) | D ₁ | 30-95 | | | 30-95 | | | 40-130 | | | 50-170 | | |
| Bore diameter (torque limiting portion) Ø - Ø F7 (mm) | D ₂ | 30-80 | | | 40-100 | | | 40-90 | | | 40-110 | | |
| Length (mm) | E ₁ | 69 | | | 69 | | | 89 | | | 110 | | |
| Length (mm) | E ₂ | 36 | | | 36 | | | 47 | | | 57 | | |
| Hub diameter (mm) | F | 154 | | | 154 | | | 190 | | | 240 | | |
| Wall thickness (mm) | K | 16 | | | 20 | | | 24 | | | 32 | | |
| Distance (mm) | L | 50 | | | 81.5 | | | 56 | | | 74 | | |
| Distance (mm) | M | 81 | | | 112.5 | | | 97 | | | 115 | | |
| Actuation path (mm) | N | 3.5 | | | 3.5 | | | 4.5 | | | 4.5 | | |
| Mounting diameter - elements (mm) | O | 154 | | | 174 | | | 171 | | | 220 | | |
| Hub outside diameter (mm) | P | 112 | | | 138 | | | 122 | | | 170 | | |
| Bore for fastening screw (mm) | Q | max Ø17 | | | max Ø22 | | | max Ø25 | | | max Ø26 | | |
| Moment of inertia (approx.) D max. + max. sgmnt (10 ⁻³ kgm ²) | | 145 | | | 172 | | | 337 | | | 1145 | | |
| Speed max. (rpm) | | 8500 | | | 6800 | | | 6300 | | | 5000 | | |
| Approx. weight at D max. + max. sgmnt (kg) | | 35 | | | 39 | | | 47 | | | 110 | | |
| Axial (mm) | | ± 3 | | | ± 3 | | | ± 4 | | | ± 5 | | |
| Lateral Elastomer insert type A / B (mm) | | 0.5 / 0.3 | | | 0.5 / 0.3 | | | 0.5 / 0.3 | | | 0.6 / 0.4 | | |
| Angular Elastomer insert type A / B (degree) | | 1.5 / 1.0 | | | 1.5 / 1.0 | | | 1.5 / 1.0 | | | 1.5 / 1.0 | | |
| Dynamic torsional stiffness at T _{KN} (Elastomer insert type A / B) (10 ³ Nm/rad) | | 175 / 216 | | | 175 / 216 | | | 337 / 743 | | | 1180 / 1340 | | |

For technical information about the elastomer insert segments see page 97.

ST2

WITH SIMPLE KEYWAY MOUNTING

200 - 25,000 Nm



NEW: ATEX


PROPERTIES

MATERIAL

- ▶ **Safety coupling portion:** hardened steel (nitrocarburized surface)
- ▶ **Elastomer segments:** precision molded, wear resistant rubber compound (75-80 Shore A)
- ▶ **Elastomer coupling:** hubs made from coated high strength cast steel

DESIGN

With keyway connection (spline profile on request). Elastomer segments compensate for misalignment and absorb vibration. Safety elements evenly spaced around the circumference. Field adjustable within the specified range.

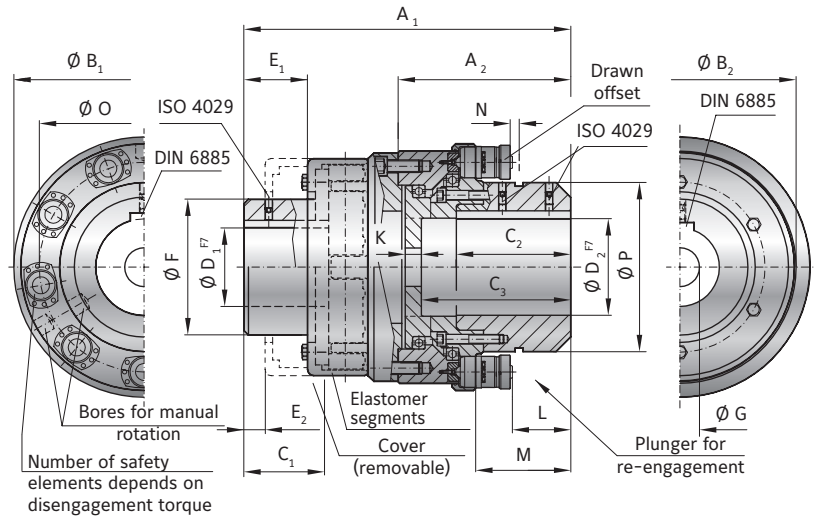

MODEL ST2 | SIZE 2 - 25

| SIZE | | 2 | | | 5 | | | 10 | | | 25 | | |
|---|----------------|-----------|---------|---------|-----------|--------|--------|------------|--------|--------|------------|--------|---------|
| Adjustment range available from - to (KNm) | | 0.2-0.5 | 0.5-1.0 | 1.0-1.5 | 0.7-2 | 1.2-4 | 3.2-5 | 2-5 | 4-10 | 6-14 | 6-12 | 9-18 | 15-25 |
| | | 3×ST10 | 6×ST10 | 6×ST10 | 3×ST15 | 6×ST15 | 6×ST15 | 3×ST15 | 6×ST15 | 9×ST15 | 6×ST15 | 9×ST15 | 12×ST15 |
| Overall length ±2 (mm) | A ₁ | 264 | | | 313 | | | 360 | | | 437 | | |
| Length of torque limiting portion (mm) | A ₂ | 120 | | | 150 | | | 183 | | | 230 | | |
| Flange outside diameter (ST portion) (mm) | B ₁ | 198 | | | 220 | | | 270 | | | 318 | | |
| Flange outside diameter (elastomer portion) (mm) | B ₂ | 221 | | | 250 | | | 290 | | | 330 | | |
| Fit length/keyway length D1 (mm) | C ₁ | 82 | | | 89 | | | 97 | | | 116 | | |
| Fit length/keyway length D2 (mm) | C ₂ | 100 | | | 121 | | | 120 | | | 155 | | |
| Bore depth (torque limiting portion) (mm) | C ₃ | 100 | | | 124 | | | 158 | | | 200 | | |
| Bore diameter (elastomer portion) Ø - Ø F7 (mm) | D ₁ | 30-80 | | | 40-100 | | | 40-105 | | | 60-130 | | |
| Bore diameter (torque limiting portion) Ø - Ø F7 (mm) | D ₂ | 30-75 | | | 40-90 | | | 40-110 | | | 60-140 | | |
| Length to cover (mm) | E ₁ | 65 | | | 70 | | | 70 | | | 87 | | |
| Length to (cover removed) (mm) | E ₂ | 24 | | | 23 | | | 22 | | | 26 | | |
| Hub diameter (mm) | F | 130 | | | 145 | | | 160 | | | 200 | | |
| Bore for fastening screw (mm) | G | max. Ø 75 | | | max. Ø 90 | | | max. Ø 110 | | | max. Ø 140 | | |
| Distance (mm) | L | 10.5 | | | 16.5 | | | 45 | | | 80 | | |
| Distance (mm) | M | 51.5 | | | 66.5 | | | 95 | | | 130 | | |
| Actuation path (mm) | N | 3.5 | | | 4.0 | | | 4 | | | 4 | | |
| Mounting diameter - elements (mm) | O | 154 | | | 171 | | | 220 | | | 270 | | |
| Hub outside diameter (mm) | P | 104 | | | 120 | | | 170 | | | 218 | | |
| Moment of inertia (approx.) D max. + max. sgmnt (10 ⁻³ kgm ²) | | 152 | | | 289 | | | 854 | | | 1850 | | |
| Speed max. (rpm) | | 3400 | | | 3000 | | | 2400 | | | 2000 | | |
| Approx. weight at D max. + max. sgmnt (kg) | | 29 | | | 43.7 | | | 93 | | | 115 | | |
| Axial (mm) | | 1.5 | | | 1.5 | | | 1.5 | | | 1.5 | | |
| Lateral (mm) | | 0.3 | | | 0.4 | | | 0.4 | | | 0.5 | | |
| Angular (degree) | | 1 | | | 1 | | | 1 | | | 1 | | |
| Dynamic torsional stiffness at T _{KN} (Standard A Insert) (10 ³ Nm/rad) | | 58 | | | 92 | | | 145 | | | 230 | | |

* larger bore diameters upon request. | For technical information about the elastomer insert segments see page 29.

ST2

WITH SIMPLE KEYWAY MOUNTING

12,000 - 165,000 Nm



NEW: ATEX


PROPERTIES

MATERIAL

- ▶ **Safety coupling portion:** hardened steel (nitrocarburized surface)
- ▶ **Elastomer segments:** precision molded, wear resistant rubber compound (75-80 Shore A)
- ▶ **Elastomer coupling:** hubs made from coated high strength cast steel

DESIGN

With keyway connection (spline profile on request). Elastomer segments compensate for misalignment and absorb vibration. Safety elements evenly spaced around the circumference. Field adjustable within the specified range.

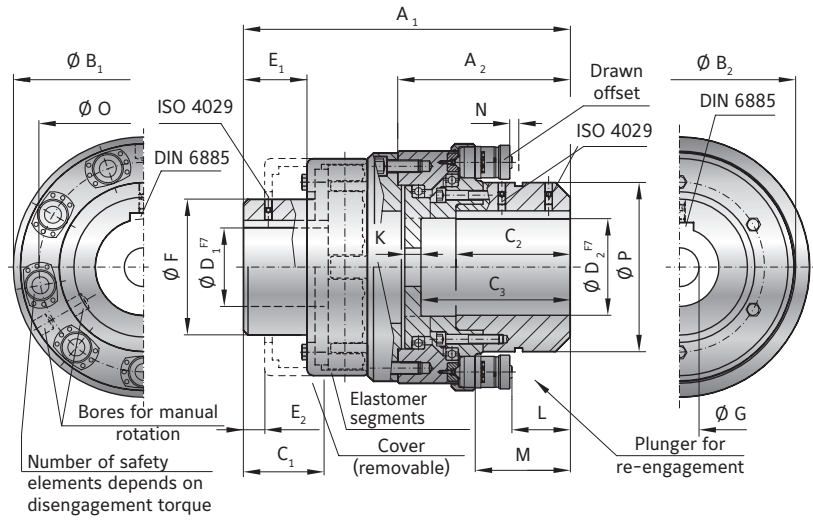

SAFETY COUPLINGS
ST

MODEL ST2 | SIZE 40 - 160

| SIZE | | 40 | | | 60 | | | 100 | | | 160 | | |
|---|----------------|------------|--------|--------|------------|---------|---------|------------|--------|--------|------------|--------|--------|
| Adjustment range available from - to (KNm) | | 12-21 | 22-32 | 32-45 | 11-18 | 22-36 | 30-55 | 24-50 | 45-90 | 80-110 | 25-55 | 50-110 | 80-165 |
| | | 6×ST30 | 6×ST30 | 9×ST30 | 3×ST 30 | 6×ST 30 | 9×ST 30 | 3×ST70 | 6×ST70 | 9×ST70 | 3×ST70 | 6×ST70 | 9×ST70 |
| Overall length ±2 (mm) | A ₁ | 565 | | | 580 | | | 716 | | | 730 | | |
| Length of torque limiting portion (mm) | A ₂ | 305 | | | 320 | | | 396 | | | 410 | | |
| Flange outside diameter (ST portion) (mm) | B ₁ | 428 | | | 459 | | | 592 | | | 648 | | |
| Flange outside diameter (elastomer portion) (mm) | B ₂ | 432 | | | 432 | | | 553 | | | 553 | | |
| Fit length/keyway length D1 (mm) | C ₁ | 160 | | | 160 | | | 230 | | | 230 | | |
| Fit length/keyway length D2 (mm) | C ₂ | 170 | | | 220 | | | 280 | | | 290 | | |
| Bore depth (torque limiting portion) (mm) | C ₃ | 210 | | | 275 | | | 280 | | | 360 | | |
| Bore diameter (elastomer portion) Ø - Ø F7 (mm) | D ₁ | 90-170 | | | 80-160 | | | 100-200 | | | 100-200 | | |
| Bore diameter (torque limiting portion) Ø - Ø F7 (mm) | D ₂ | 90-170 | | | 80-200 | | | 100-250 | | | 100-290 | | |
| Length to cover (mm) | E ₁ | 113 | | | 112 | | | 152 | | | 152 | | |
| Length to (cover removed) (mm) | E ₂ | 39 | | | 39 | | | 65 | | | 65 | | |
| Hub diameter (mm) | F | 255 | | | 255 | | | 300 | | | 300 | | |
| Bore for fastening screw (mm) | G | max. Ø 144 | | | max. Ø 200 | | | max. Ø 216 | | | max. Ø 290 | | |
| Distance (mm) | L | 102 | | | 99 | | | 128 | | | 135 | | |
| Distance (mm) | M | 170 | | | 167 | | | 218 | | | 225 | | |
| Actuation path (mm) | N | 7.5 | | | 7.5 | | | 10 | | | 10 | | |
| Mounting diameter - elements (mm) | O | 350 | | | 376 | | | 490 | | | 532 | | |
| Hub outside diameter (mm) | P | 265 | | | 295 | | | 380 | | | 418 | | |
| Moment of inertia (approx.) D max. + max. sgmnt (10 ⁻³ kgm ²) | | 6010 | | | 8960 | | | 21890 | | | 36858 | | |
| Speed max. (rpm) | | 1800 | | | 1800 | | | 1500 | | | 1500 | | |
| Approx. weight at D max. + max. sgmnt (kg) | | 271 | | | 287 | | | 642 | | | 729 | | |
| Axial (mm) | | 2 | | | 2 | | | 2.5 | | | 2.5 | | |
| Lateral (mm) | | 0.6 | | | 0.6 | | | 0.7 | | | 0.7 | | |
| Angular (degree) | | 1 | | | 1 | | | 1 | | | 1 | | |
| Dynamic torsional stiffness at T _{KN} (Standard A Insert) (10 ³ Nm/rad) | | 500 | | | 580 | | | 850 | | | 1000 | | |

* larger bore diameters upon request. | For technical information about the elastomer insert segments see page 29.

ST4

WITH SIMPLE KEYWAY MOUNTING

200 - 25,000 Nm




PROPERTIES

MATERIAL

- ▶ **Safety coupling portion:** hardened steel (nitrocarburized surface)
- ▶ **Gear coupling portion:** wear resistant high strength alloy steel (nitrocarburized surface)

DESIGN

With keyway connection (spline profile on request). Gear coupling for misalignment compensation. Safety elements evenly spaced around the circumference. Field adjustable within the specified range.

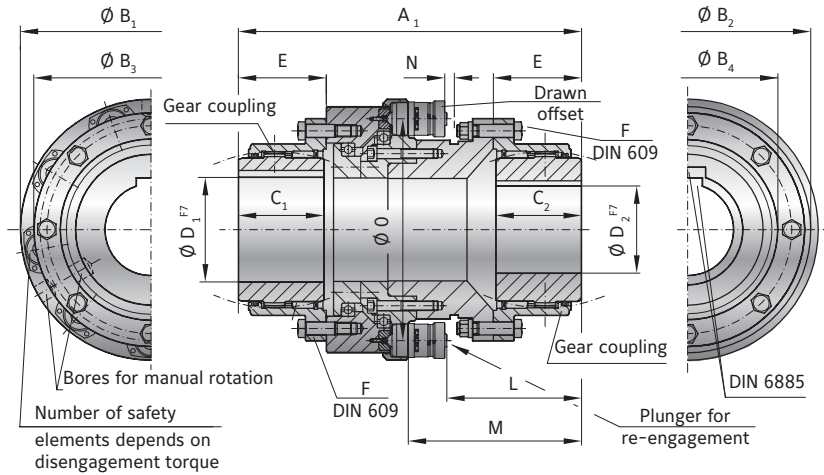

MODEL ST4 | SIZE 2 - 25

| SIZE | | 2 | | | 5 | | | 10 | | | 25 | | | |
|---|--------------------------------------|------------------|---------|---------|---------|---------|--------|--------|---------|--------|--------|---------|---------|---------|
| Adjustment range available from - to | (kNm) | | 0.2-0.5 | 0.5-1.0 | 1.0-1.5 | 0.7-2 | 1.2-4 | 3.2-6 | 2-5 | 4-10 | 6-14 | 6-12 | 9-18 | 15-25 |
| | | | 3×ST10 | 6×ST10 | 6×ST10 | 3×ST15 | 6×ST15 | 6 ST15 | 3×ST15 | 6×ST15 | 9×ST15 | 6×ST15 | 9× ST15 | 12×ST15 |
| Overall length | (mm) | A ₁ | 280 | | | 350 | | | 390 | | | 460 | | |
| Flange outside diameter (ST portion) | (mm) | B ₁ | 198 | | | 220 | | | 270 | | | 318 | | |
| Mounting flange outside diameter (ST portion) | (mm) | B ₂ | 192 | | | 209 | | | 259 | | | 300 | | |
| Flange outside diameter (gear coupling) | (mm) | B ₃ | 168 | | | 200 | | | 225 | | | 265 | | |
| Hub diameter (gear coupling) | (mm) | B ₄ | 130.5 | | | 158.4 | | | 183.4 | | | 211.5 | | |
| Fit length/keyway length | (mm) | C _{1/2} | 62 | | | 76 | | | 90 | | | 105 | | |
| Bore diameter Ø to Ø F7 | (mm) | D _{1/2} | 30-78 | | | 32-98 | | | 42-112 | | | 46-132 | | |
| Length | (mm) | E | 63.5 | | | 78.5 | | | 92.5 | | | 108 | | |
| Screw | (mm) | F | 6×M8 | | | 10×M12 | | | 12×M12 | | | 12×M16 | | |
| Tightening torque | (mm) | F | 18 | | | 65 | | | 65 | | | 150 | | |
| Distance | (mm) | L | 110 | | | 138 | | | 159.5 | | | 202 | | |
| Distance | (mm) | M | 148 | | | 188 | | | 209.5 | | | 252 | | |
| Actuation path | (mm) | N | 3.5 | | | 4.5 | | | 4.5 | | | 4.5 | | |
| Mounting diameter - elements | (mm) | O | 154 | | | 171 | | | 220 | | | 270 | | |
| Moment of inertia (approx.) D max. + max. sgmnt | (10 ⁻³ kgm ²) | | 108 | | | 244 | | | 529 | | | 1117 | | |
| Speed max. | (rpm) | | 4000 | | | 3900 | | | 3700 | | | 3550 | | |
| Approx. weight at D max. + max. sgmnt | (kg) | | 25 | | | 45 | | | 65 | | | 100 | | |
| Axial | (mm) | | 1.5 | | | 2.5 | | | 2.5 | | | 3 | | |
| Angular | (Degrees) | | 2×0.35° | | | 2×0.35° | | | 2×0.35° | | | 2×0.35° | | |

* Larger bore diameters upon request. | For technical information about the gear coupling segments see page 19.

ST4

WITH SIMPLE KEYWAY MOUNTING

12,000 - 250,000 Nm




PROPERTIES

MATERIAL

- ▶ **Safety coupling portion:** hardened steel (nitrocarburized surface)
- ▶ **Gear coupling portion:** wear resistant high strength alloy steel (nitrocarburized surface)

DESIGN

With keyway connection (spline profile on request). Gear coupling for misalignment compensation. Safety elements evenly spaced around the circumference. Field adjustable within the specified range.

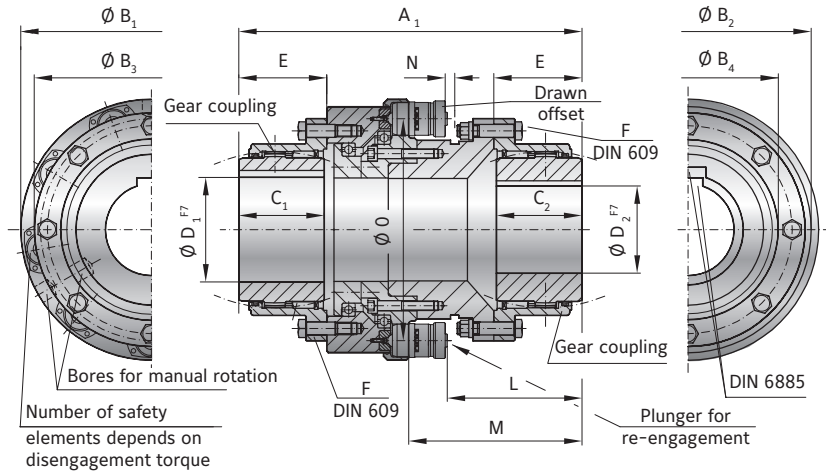


SAFETY COUPLINGS
ST

MODEL ST4 | SIZE 40 - 250

| SIZE | | 40 | | | 60 | | | 100 | | | 160 | | | 250 | |
|---|--------------------------------------|------------------|---------|--------|--------|---------|--------|--------|---------|--------|--------|---------|--------|---------|---------|
| Adjustment range available from - to | (kNm) | 12-21 | 22-32 | 32-45 | 11-18 | 22-36 | 30-55 | 24-50 | 45-90 | 80-110 | 25-55 | 50-110 | 80-165 | 100-170 | 160-250 |
| | | 6×ST30 | 6×ST30 | 9×ST30 | 3×ST30 | 6×ST30 | 9×ST30 | 3×ST70 | 6×ST70 | 9×ST70 | 3×ST70 | 6×ST70 | 9×ST70 | 8×ST71 | 12×ST71 |
| Overall length | (mm) | A ₁ | 580 | | | 650 | | | 780 | | | 860 | | | 1060 |
| Flange outside diameter (ST portion) | (mm) | B ₁ | 428 | | | 459 | | | 592 | | | 648 | | | 740 |
| Mounting flange outside diameter (ST portion) | (mm) | B ₂ | 399 | | | 418 | | | 560 | | | 618 | | | 724 |
| Flange outside diameter (gear coupling) | (mm) | B ₃ | 330 | | | 370 | | | 438 | | | 525 | | | 639 |
| Hub diameter (gear coupling) | (mm) | B ₄ | 275.5 | | | 307 | | | 367 | | | 423 | | | 553 |
| Fit length/keyway length | (mm) | C _{1/2} | 135 | | | 150 | | | 190 | | | 220 | | | 290 |
| Bore diameter Ø to Ø F7 | (mm) | D _{1/2} | 60-174 | | | 70-190 | | | 110-233 | | | 120-280 | | | 200-340 |
| Length | (mm) | E | 139 | | | 154 | | | 194 | | | 225 | | | 296 |
| Screw | (mm) | F | 14×M16 | | | 14×M18 | | | 14×M22 | | | 16×M24 | | | 22×M24 |
| Tightening torque | (mm) | F | 150 | | | 220 | | | 400 | | | 520 | | | 670 |
| Distance | (mm) | L | 238 | | | 275 | | | 318 | | | 360 | | | 458 |
| Distance | (mm) | M | 306 | | | 343 | | | 408 | | | 450 | | | 534 |
| Actuation path | (mm) | N | 8 | | | 8 | | | 10 | | | 10 | | | 10 |
| Mounting diameter - elements | (mm) | O | 350 | | | 376 | | | 490 | | | 532 | | | 630 |
| Moment of inertia (approx.) D max. + max. sgmnt | (10 ⁻³ kgm ²) | | 4363 | | | 6650 | | | 20611 | | | 33820 | | | 84926 |
| Speed max. | (rpm) | | 2750 | | | 2420 | | | 1950 | | | 1730 | | | 950 |
| Approx. weight at D max. + max. sgmnt | (kg) | | 225 | | | 293 | | | 570 | | | 718 | | | 1280 |
| Axial | (mm) | | 4 | | | 4 | | | 4 | | | 5 | | | 6 |
| Angular | (Degrees) | | 2×0.35° | | | 2×0.35° | | | 2×0.35° | | | 2×0.35° | | | 2×0.35° |


* larger bore diameters upon request. | For technical information about the gear coupling segments see page 19.

SAFETY COUPLINGS - FURTHER POSSIBILITIES

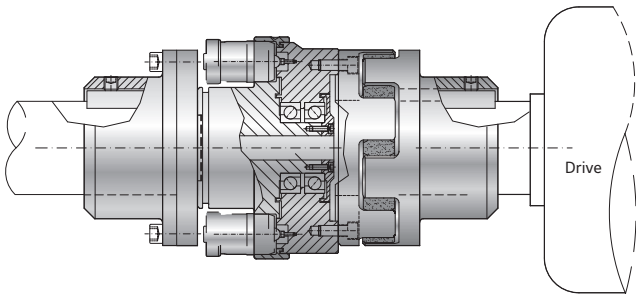

FOR EXTRUDER APPLICATIONS

- ▶ with elastic jaw coupling
- ▶ precise overload protection
- ▶ removable center section for lateral mounting

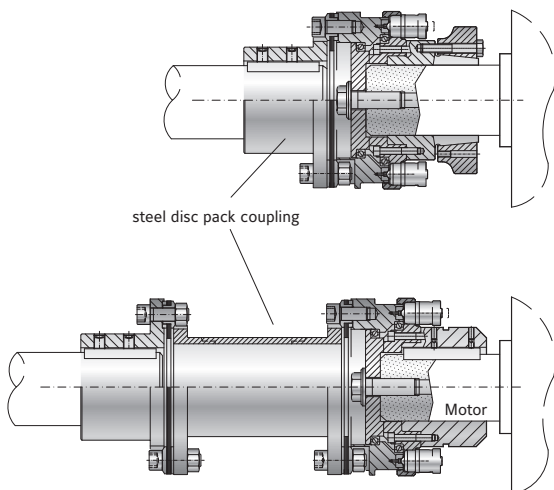


WITH TORSIONALLY STIFF DISC PACK COUPLING

- ▶ single or double flex
- ▶ high torsional stiffness
- ▶ disc packs from highly elastic spring steel



WITH TORSIONALLY STIFF BELLOWS COUPLING

- ▶ with clamping hubs, keyway mounting or flange mounting
- ▶ compensation for misalignment
- ▶ bellows made from highly elastic stainless steel

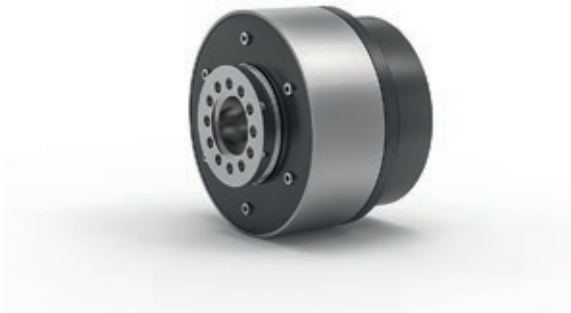


FOR HIGH SPEED APPLICATIONS

- ▶ integral ball-plunger system
- ▶ extremely compact with a low moment of inertia
- ▶ balanced for high speed




BUREAU VERITAS CERTIFIED

- ▶ for inland and offshore applications
- ▶ customized solutions
- ▶ rugged and special design for direct use in ship powertrains

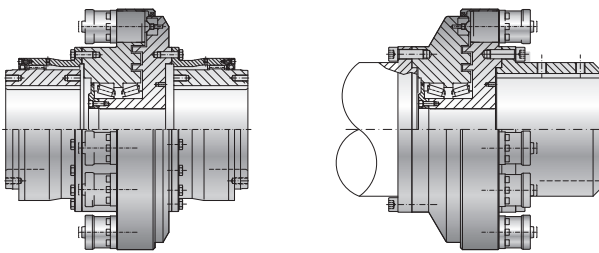

MORE DESIGNS AVAILABLE

- ▶ for 1,000,000 Nm and more
- ▶ customer specified solutions
- ▶ for all branches and industries

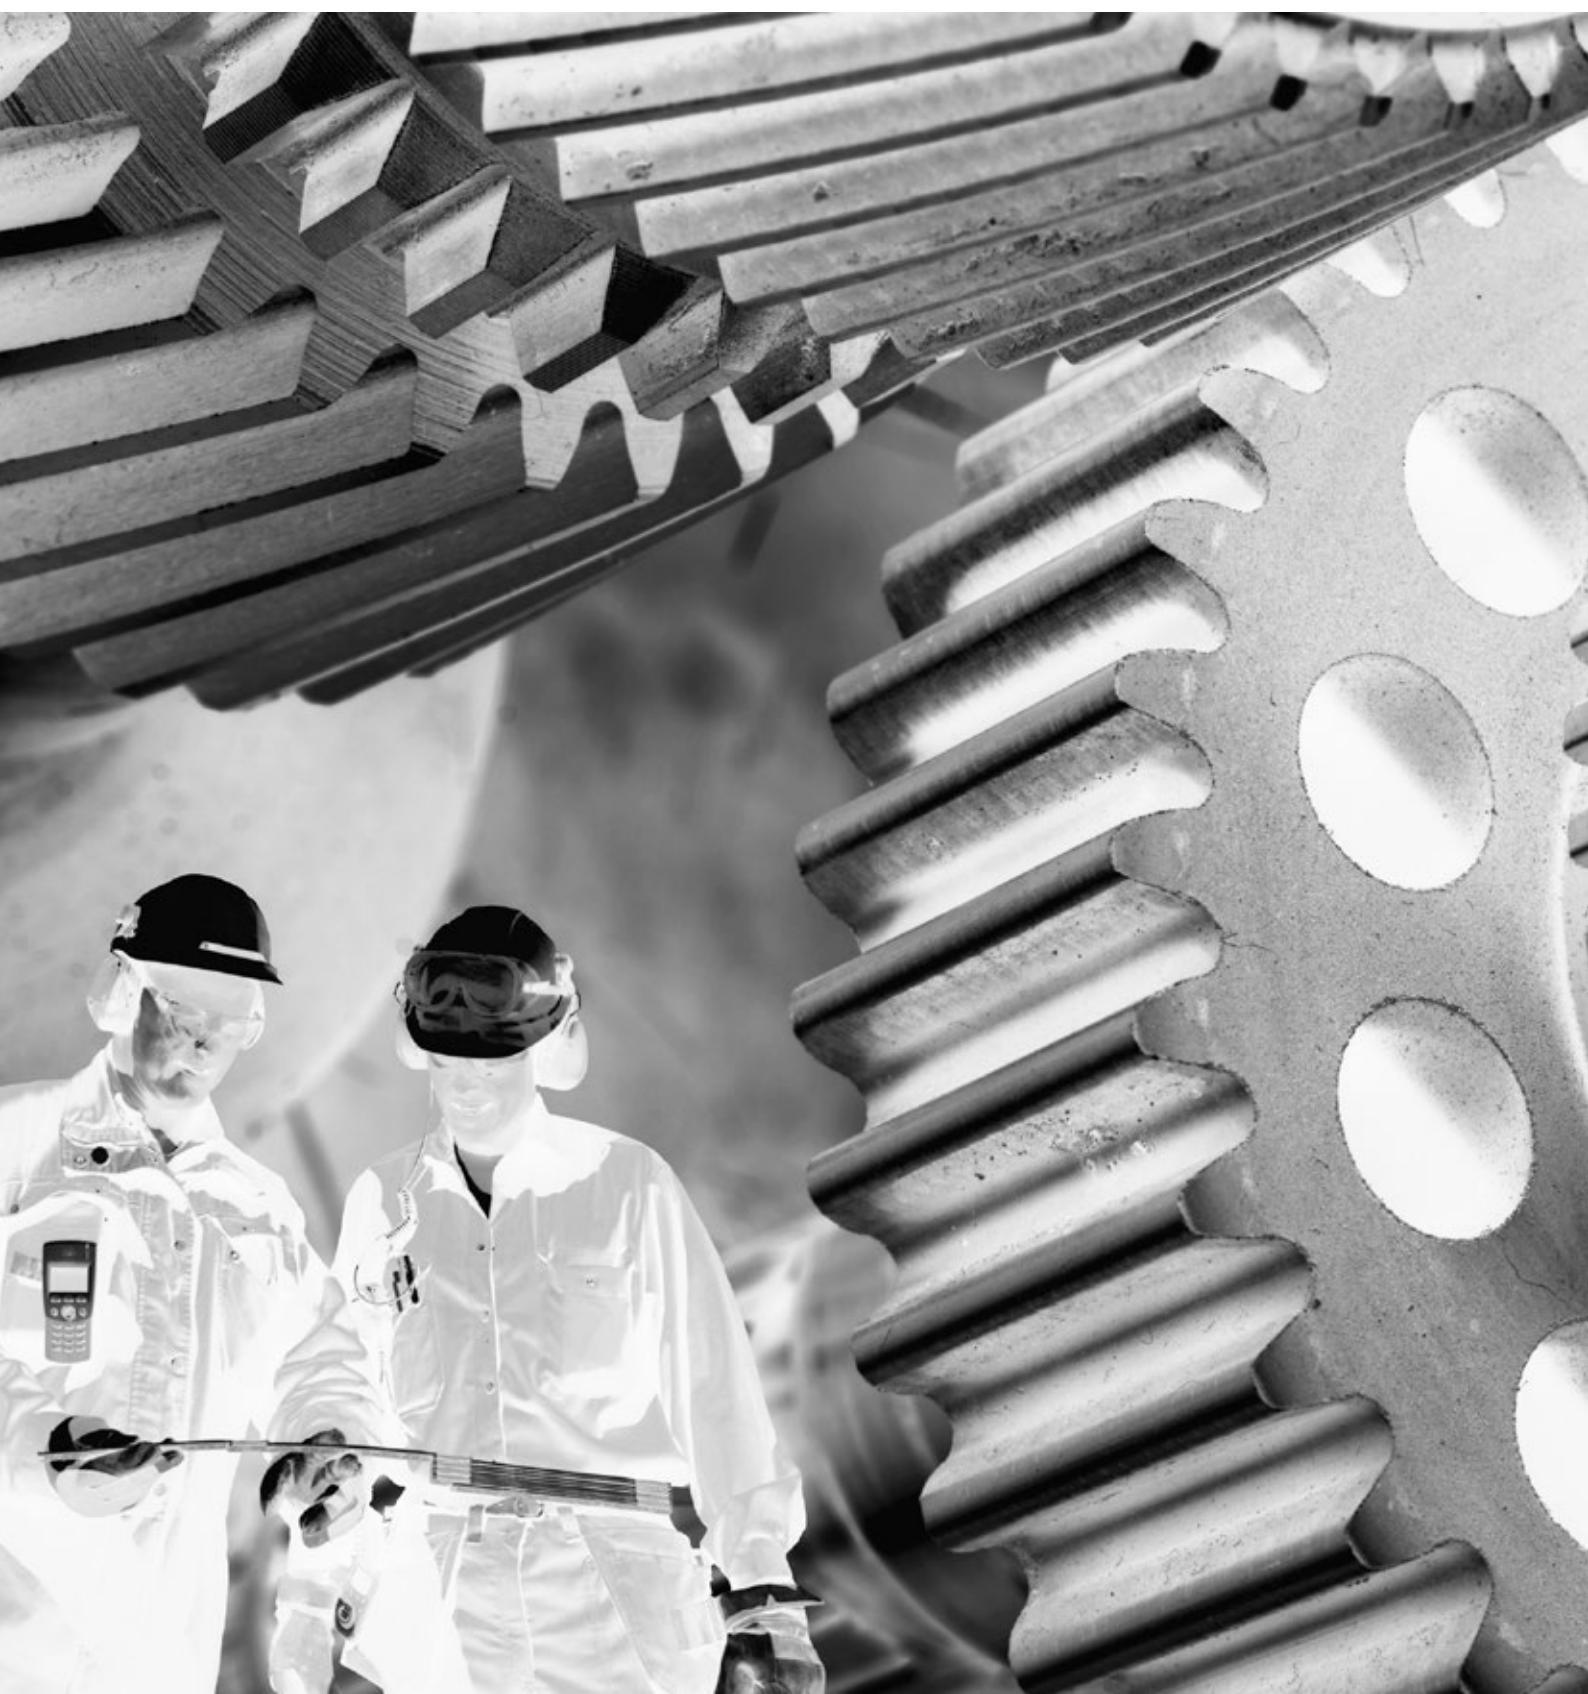

TORQSET® SAFETY COUPLINGS ACCESSORIES

ST

SAFETY ELEMENT



PROPERTIES

MATERIAL

Hardened steel (nitrocarburized surface)

DESIGN

Two part assembly for installation into prefabricated coupling components.

Part 1: detent receptacle

Part 2: self-contained, spring loaded plunger module.

The spring force setting is adjustable in the field, with the settings clearly marked on an adjustment scale.



FIT TOLERANCE

For insertion of the safety elements H7 precision holes should be used for all centered components.

RE-ENGAGEMENT

When properly located over the detent receptacle the safety element can be re-engaged through the application of pressure to the back side of the plunger core.

Design:

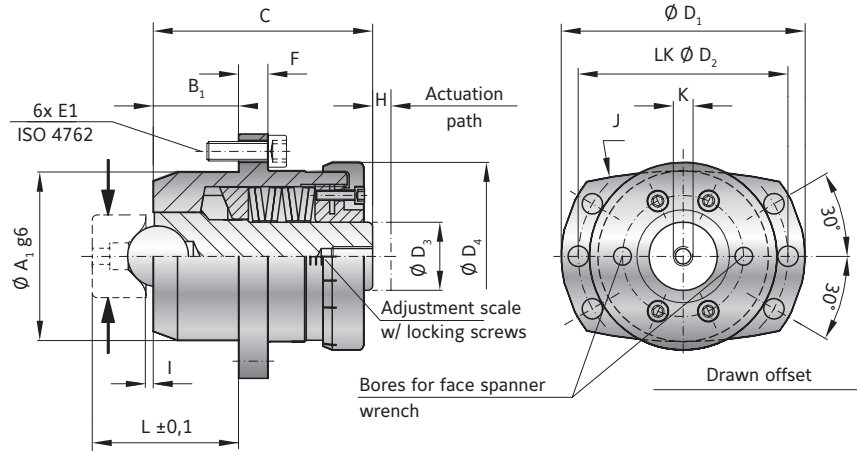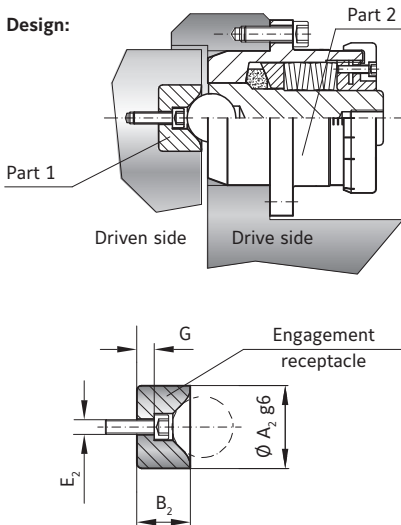

MODEL ST | SIZE 10 - 70

| SIZE | | 10 | 15 | 30 | 70 |
|--|----------------|----------------------|---------------------|---------------------|-----------------------|
| Tangential force (KN) Adjustment range available from - to (ranges) | 1 | 0.8-2.2 | 1-4 | 5-10 | 8-20 |
| | 2 | - | 2-8 | 10-20 | 15-40 |
| | 3 | 2.0-3.3 | 6-20 | 20-30 | 30-70 |
| Centering diameter of safety element g6 (mm) | A ₁ | 28 | 40 | 70 | 90 |
| Centering diameter engagement receptacle g6 (mm) | A ₂ | 18 | 24 | 34 | 44 |
| Centering length of safety element (mm) | B ₁ | 15 | 20 | 35 | 45 |
| Centering length engagement receptacle (mm) | B ₂ | 13.5 | 14 | 22 | 30 |
| Overall length (mm) | C | 56 | 70 | 103 | 135 |
| Outside diameter (mm) | D ₁ | 45 | 59 | 100 | 129 |
| Bolt circle diameter (mm) | D ₂ | 37.5 | 50 | 86 | 110 |
| Diameter plunger (mm) | D ₃ | 8 | 16 | 28 | 35 |
| Diameter adjustment nut (mm) | D ₄ | 32 | 44 | 75 | 92 |
| Screw / Tightening torque ISO 4762 (mm) | E ₁ | 6 x M4 x 12 / 4.5 Nm | 6 x M5 x 16 / 10 Nm | 6 x M8 x 25 / 40 Nm | 6 x M12 x 35 / 120 Nm |
| Screw / Tightening torque ISO 4762 (mm) | E ₂ | M3 x 20 4.5 Nm | M4 x 14 4.5 Nm | M6 x 20 15.5 Nm | M8 x 25 38 Nm |
| Flange thickness (mm) | F | 5 | 7 | 12 | 16 |
| Distance (mm) | G | 6.5 | 5 | 8 | 10 |
| Actuation path (mm) | H | 3 | 4 | 7.5 | 10 |
| Distance (mm) | I | 1.5 | 2 | 3 | 4 |
| Radius (mm) | J | 100 | 110 | 200 | 250 |
| Inner thread (mm) | K | M5 x 10 | M8 x 15 | M10 x 25 | M16 x 30 |
| Distance ± 0,1 (mm) | L | 30 | 36 | 60 | 79 |
| Weight (kg) | | 0.26 | 0.65 | 2.7 | 6 |

axial spring force = tangential force/1.4


| ORDERING EXAMPLE | ST | 30 | 2 | 12 | XX |
|--|----|----|---|----|----|
| Model | ● | | | | |
| Size | | ● | | | |
| Adjustment range 1/2/3 | | | ● | | |
| Tangential force (KN) | | | | ● | |
| For custom features place an XX at the end of the part number and describe the special requirements (e.g. ST / 30 / 2 / 12 / XX) | | | | | |

ACCESSORIES ST

TORQSET® SAFETY COUPLINGS

ENGAGEMENT AND DISENGAGEMENT

ST

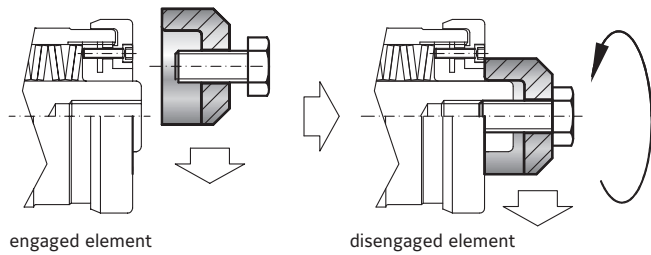


ORDER NUMBER

| SIZE | ENGAGEMENT / DISENGAGEMENT TOOL |
|------|---------------------------------|
| 10 | Order number AV / 0010 |
| 15 | Order number AV / 0015 |
| 30 | Order number AV / 0030 |
| 70 | Order number AV / 0070 |

ADJUSTMENT WRENCH

ST

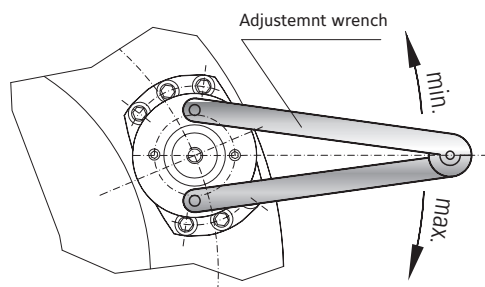


ORDER NUMBER

| SIZE | ADJUSTMENT WRENCH |
|------|-------------------------|
| 10 | Order number SLS / 0010 |
| 15 | Order number SLS / 0015 |
| 30 | Order number SLS / 0030 |
| 70 | Order number SLS / 0070 |

SWITCH PLATE

ST

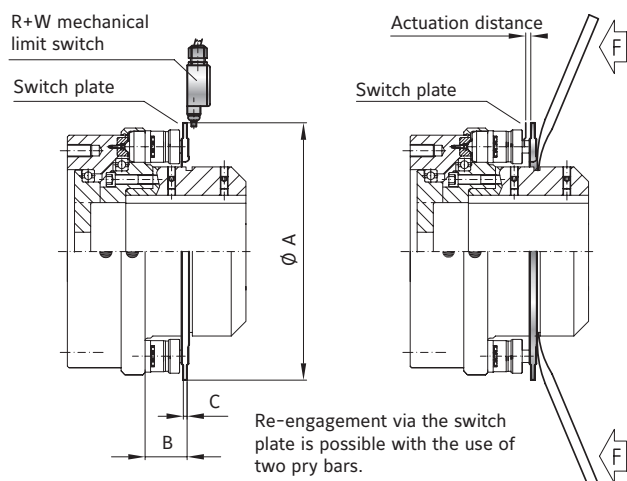

Switch plates are available on request for all sizes and SIZES.

Contact R+W for more information.


SAFETY COUPLINGS
ST

ACCESSORIES ST

TORQSET® SAFETY COUPLINGS

PROXIMITY SWITCH


ST

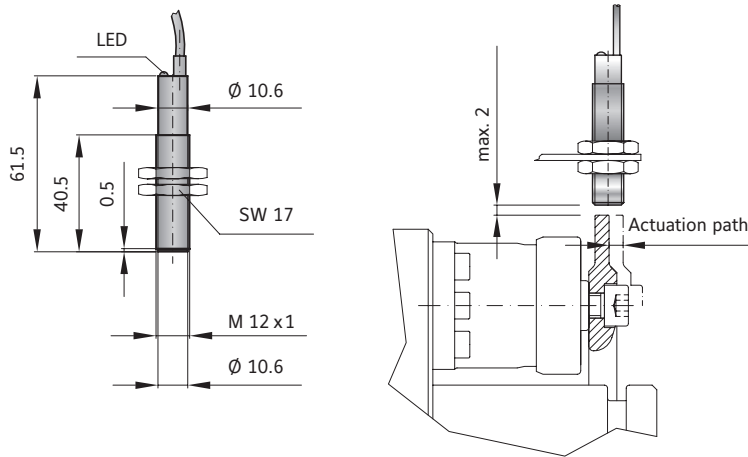

ORDER NUMBER 650.2703.001


| TECHNICAL DATA | ST |
|-----------------------|----------------|
| Voltage | 10 to 30 V DC |
| Max. output current | 200 mA |
| Max. switch frequency | 800 KHz |
| Temperature range | -25° to +70° C |
| Protective system | IP 67 |
| Switch type | normally open |
| Max. detection gap | max. 2 mm |

SWITCH DIAGRAM ST



MECHANICAL LIMIT SWITCH


ST

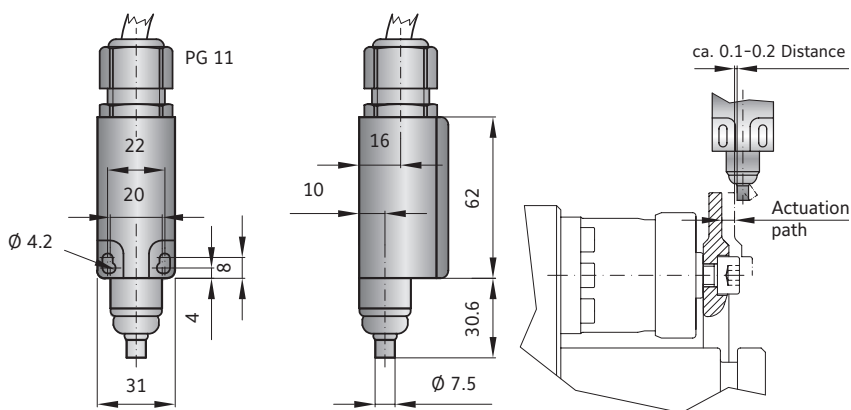

ORDER NUMBER 618.6740.644

| TECHNICAL DATA | ST |
|-----------------------|----------------------------|
| Max. voltage | 250 V AC |
| Max. constant current | 2.5h A |
| Protective system | IP 65 |
| Contact system | Opener (forced separating) |
| Temperature range | -30° to +80° C |
| Actuation | Plunger (metal) |

SWITCH DIAGRAM ST





The switch plunger (pictured above and right) should be located as close to the actuation ring / limit switch plate as possible (approximately 0.1-0.2mm).



ATEX LIMIT SWITCH

ORDER NUMBER EEX. 1624.004

ST

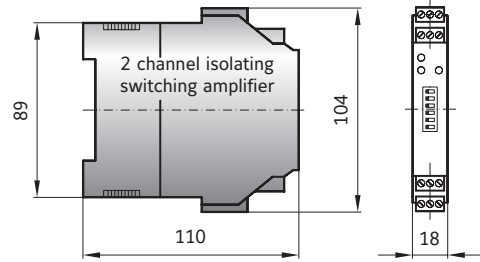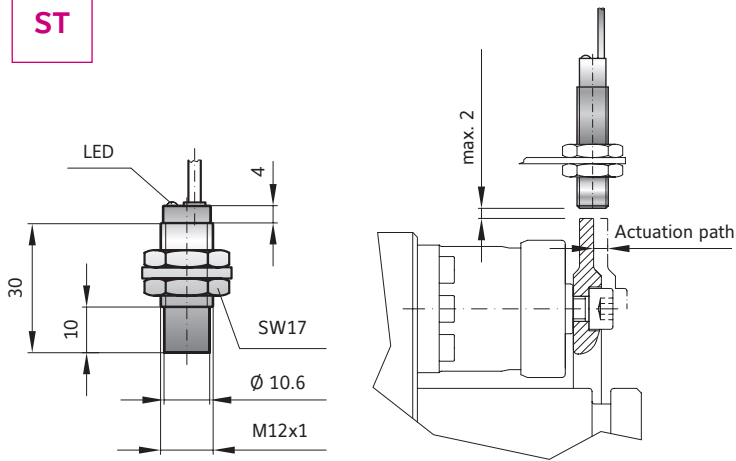

SAFETY COUPLINGS
ST

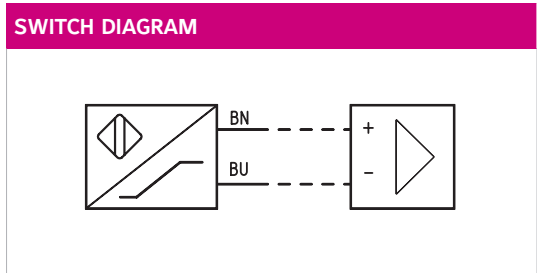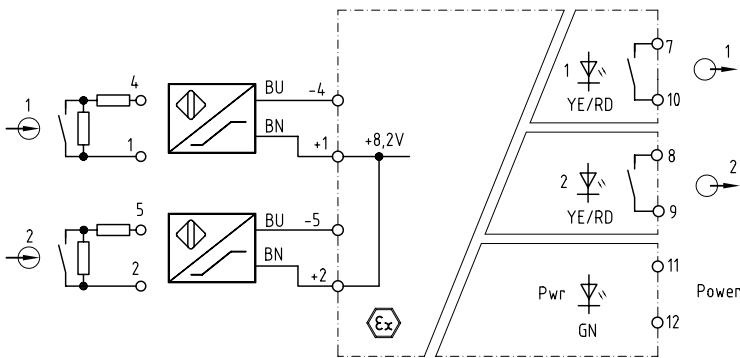

Technical data on request.





TORSIONALLY STIFF DISC PACK COUPLINGS 350 - 100,000 NM



GENERAL INFORMATION ABOUT R+W DISC PACK COUPLINGS:



SERVICE LIFE

R+W disc pack couplings are fatigue resistant and wear free for a virtually infinite service life, as long as the technical limits are not exceeded.

FIT CLEARANCE

Overall shaft / hub clearance of 0.01 - 0.05 mm

TEMPERATURE RANGE

-30 to +280° C

ROTATIONAL SPEED

see table






DELIVERY

pre-assembled (separate components on request)

ATEX (Optional)

Certified for use in hazardous environments on request

TORSIONALLY STIFF DISC PACK COUPLINGS 350 – 100,000 Nm

| MODEL | | FEATURES | |
|-------|---|---|-------------|
| LP1 S |  | <p>with keyway mounting single flex design from 350 - 50,000 Nm</p> <ul style="list-style-type: none"> ▶ extremely high torsional stiffness ▶ compact and robust design ▶ compensates for axial and angular misalignment only | Pages 70-71 |
| LP1 D |  | <p>with keyway mounting dual flex design from 350 - 50,000 Nm</p> <ul style="list-style-type: none"> ▶ high torsional stiffness ▶ robust design ▶ compensates for axial, angular and lateral misalignment | Pages 70-71 |
| LP2 |  | <p>with keyway mounting dual flex design with spacer from 350 - 50,000 Nm</p> <ul style="list-style-type: none"> ▶ high torsional stiffness ▶ customer specified length on request ▶ compensates for axial, angular and lateral misalignment | Pages 72-73 |
| LP4 S |  | <p>with conical clamping ring single flex design from 350 - 50,000 Nm</p> <ul style="list-style-type: none"> ▶ extremely high torsional stiffness ▶ compact design ▶ good for reversing loads ▶ zero backlash torque transmission ▶ compensates for axial and angular misalignment only | Pages 74-75 |
| LP4 D |  | <p>with conical clamping ring dual flex design from 350 - 50,000 Nm</p> <ul style="list-style-type: none"> ▶ high torsional stiffness ▶ good for reversing loads ▶ zero backlash torque transmission ▶ compensates for axial, angular and lateral misalignment | Pages 74-75 |

MODEL

FEATURES

LP3



**with conical clamping ring
dual flex design
from 350 - 50,000 Nm**

Pages 76-77

- ▶ high torsional stiffness
- ▶ high clamping pressure
- ▶ good for reversing loads
- ▶ zero backlash torque transmission
- ▶ compensates for axial, angular and lateral misalignment

LP5 S



**with clamping hub
single flex design
from 350 - 50,000 Nm**

Pages 78-79

- ▶ extremely high torsional stiffness
- ▶ compact and robust design
- ▶ zero backlash torque transmission
- ▶ keyway optional
- ▶ compensates for axial and angular misalignment only

LP5 D



**with clamping hub
dual flex design
from 350 - 50,000 Nm**

Pages 78-79

- ▶ high torsional stiffness
- ▶ zero backlash torque transmission
- ▶ keyway optional
- ▶ compensates for axial, angular and lateral misalignment

LPH D



**with fully split clamping hub
dual flex design
from 350 - 50,000 Nm**

Pages 80-81

- ▶ high torsional stiffness
- ▶ facilitates lateral mounting
- ▶ zero backlash torque transmission
- ▶ keyway optional
- ▶ compensates for axial, angular and lateral misalignment

LPZ



**short intermediate spacer
for dual flex configurations
from 350 - 50,000 Nm**

Pages 82-83

- ▶ high torsional stiffness
- ▶ for combination with various hub designs
- ▶ compensates for axial, angular and lateral misalignment



TORSIONALLY STIFF DISC PACK COUPLINGS

350 – 100,000 Nm

| MODEL | | FEATURES | |
|-------------|--|---|-------------|
| LPA |  | with keyway mounting for API applications from 500 - 24,000 Nm <ul style="list-style-type: none">▶ API 610 / 671▶ drop out center section▶ safety catches in case of disc pack rupture▶ metric configuration | Pages 84-87 |
| LPAI |  | with keyway mounting for API applications from 500 - 24,000 Nm <ul style="list-style-type: none">▶ API 610 / 671▶ drop out center section▶ safety catches in case of disc pack rupture▶ imperial configuration | Pages 84-87 |
| iLP |  ARTIFICIAL INTELLIGENCE BY R+W. | intelligent coupling with integral sensor system from 350 - 50,000 Nm <ul style="list-style-type: none">▶ works with various hub designs▶ dual flex configuration▶ compensates for axial, angular and lateral misalignment▶ reports on torque, speed axial force and more | Pages 88-89 |
| LP | | options / special solutions / higher torques | Pages 90-91 |


DESIGN

DISC PACK COUPLINGS

Taking into account the friction drive principle of the R+W disc coupling design, torque is transferred without micro-movements or backlash.



MISALIGNMENT COMPENSATION

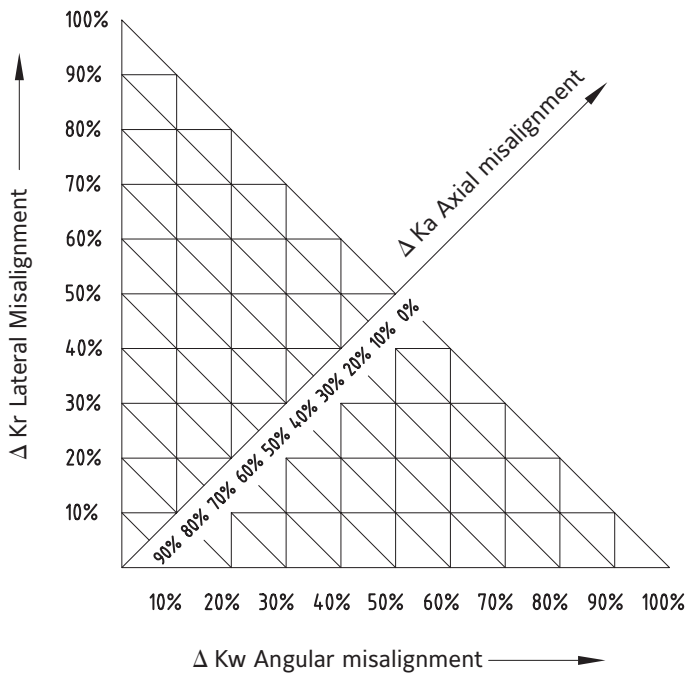

$$\Delta K_{total} = \Delta K_r + \Delta K_w + \Delta K_a \leq 100\%$$

The maximum total misalignment of the disc coupling should not exceed 100% of the combined percentages of the maximum axial, angular and lateral values as shown in the product data tables.

Example: pump skid

- axial misalignment: 20%
- lateral misalignment: 40%
- angular misalignment: 40%

$$\Delta K_{total} = 20\% + 40\% + 40\% \leq 100\%$$

➔ coupling is fatigue resistant

LP1

WITH KEYWAY MOUNTING; SINGLE OR DUAL FLEX 350 - 50,000 Nm

S = single flex design



PROPERTIES

FEATURES

- ▶ extremely high torsional stiffness
- ▶ wear and maintenance free
- ▶ compensates for axial and angular misalignment only

MATERIAL

- ▶ **disc pack:** highly elastic spring steel
- ▶ **hubs:** high strength steel

DESIGN

Two precision machined coupling hubs mounted to the disc pack by means of high strength screws and bushings for alignment and frictional clamping of the assembly. Axial retention of the hubs on the shaft with DIN 916 set screws. From series 25,000 assembly screws/superbolts must be used.

D = dual flex design



PROPERTIES

FEATURES

- ▶ high torsional stiffness
- ▶ wear and maintenance free
- ▶ compensates for axial, angular and lateral misalignment

MATERIAL

- ▶ **disc packs:** highly elastic spring steel
- ▶ **hubs and spacer:** high strength steel

DESIGN

Two precision machined coupling hubs and spacer plate mounted to the disc packs by means of high strength screws and bushings for alignment and frictional clamping of the assembly. Axial retention of the hubs on the shaft with DIN 916 set screws. From series 25,000 assembly screws/superbolts must be used.

NEW

MODEL LP1 S|D | SIZE 300 - 2600



| SIZE | | 300 | | 500 | | 700 | | 1100 | | 1600 | | 2600 | |
|--|------------------|------------|------|-----------|------|-----------|------|-----------|------|-----------|------|-----------|------|
| Type | | S | D | S | D | S | D | S | D | S | D | S | D |
| Rated torque (Nm) | T_{KN} | 350 | | 500 | | 700 | | 1,100 | | 1,600 | | 2,600 | |
| Maximum torque (Nm) | T_{KNmax} | 700 | | 1,000 | | 1,400 | | 2,200 | | 3,200 | | 5,200 | |
| Overall length (mm) | A | 95 | 123 | 95 | 123 | 116 | 154 | 117 | 158 | 158 | 204 | 161 | 208 |
| Outside diameter (mm) | $\varnothing AD$ | 99 | | 109 | | 128 | | 133 | | 150 | | 168 | |
| Hub diameter (mm) | $\varnothing B$ | 63 | | 70,5 | | 78 | | 84 | | 86 | | 102 | |
| Hub fit length (mm) | C | 45 | | 45 | | 55 | | 55 | | 75 | | 76 | |
| Bore diameter available from \varnothing to $\varnothing H7$ (mm) | $D_{1/2}$ | 18 - 48 | | 23 - 50 | | 25 - 58 | | 25 - 60 | | 28 - 64 | | 31 - 75 | |
| Bore diameter available from \varnothing to $\varnothing H7$ (XL Hub) (mm) | $D_{1/2}$ | on request | | > 50 - 60 | | > 58 - 65 | | > 60 - 70 | | > 64 - 80 | | > 75 - 90 | |
| Assembly screw (ISO 4017) Tensioning nut (DIN 4032) | E | M8 | | M8 | | M10 | | M10 | | M12 | | M12 | |
| Tightening torque (Nm) | | 35 | | 40 | | 65 | | 95 | | 150 | | 165 | |
| Distance between hubs (mm) | G | - | 33 | - | 33 | - | 44 | - | 48 | - | 54 | - | 56 |
| Assembly length (mm) | G_1 | 60 | 50.3 | 60 | 50.3 | 75 | 66.4 | 76 | 66.4 | 98 | 77.5 | 99 | 77.5 |
| Moment of inertia** ($10^{-3}kgm^2$) | $J_{ges.}$ | 2 | 3 | 3 | 4 | 5 | 9 | 7 | 11 | 12 | 19 | 22 | 35 |
| Weight** (kg) | | 1.4 | 2.2 | 2.0 | 2.8 | 2.9 | 4.6 | 3.5 | 5.3 | 5.2 | 7.6 | 7.2 | 10.3 |
| Torsional stiffness ($10^3Nm/rad$) | C_T | 120 | | 160 | | 260 | | 300 | | 420 | | 580 | |
| Axial \pm (mm) | max. values | 0.5 | 1.0 | 0.6 | 1.0 | 0.7 | 1.5 | 0.8 | 1.5 | 1.0 | 2.0 | 1.1 | 2.0 |
| Lateral \pm (mm) | | - | 0.2 | - | 0.2 | - | 0.3 | - | 0.3 | - | 0.4 | - | 0.4 |
| Angular \pm (degree) | | 0.7 | 1.4 | 0.7 | 1.4 | 0.7 | 1.0 | 0.7 | 1.4 | 0.7 | 1.4 | 0.7 | 1.4 |
| Max. speed (min^{-1}) | | 5,800 | | 5,300 | | 4,500 | | 4,300 | | 3,800 | | 3,400 | |
| Max. speed (balanced)*** (min^{-1}) | | 11,200 | | 10,200 | | 8,700 | | 8,300 | | 7,400 | | 6,600 | |

** at maximum bore diameter | *** higher speeds on request

| ORDERING EXAMPLE | LP1 | 700 | D | 154 | 25 | 57.15 | XX |
|-----------------------------------|-----|-----|---|-----|----|-------|---|
| Model | ● | | | | | | Special designation only (e.g. special bore diameter tolerances, balancing, etc.). Contact R+W for more information |
| Size | | ● | | | | | |
| Type (S or D) | | | ● | | | | |
| Overall length (mm) | | | | ● | | | |
| Bore diameter $\varnothing D1 H7$ | | | | | ● | | |
| Bore diameter $\varnothing D2 H7$ | | | | | | ● | |


For custom features place an XX at the end of the part number and describe the special requirements (e.g. LP1 / 700 / D / 154 / 25 / 57.15 / XX - balanced for 8,000 rpm)

S = single flex design


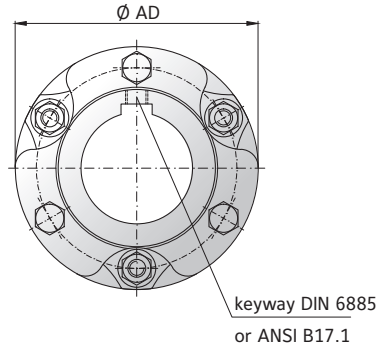
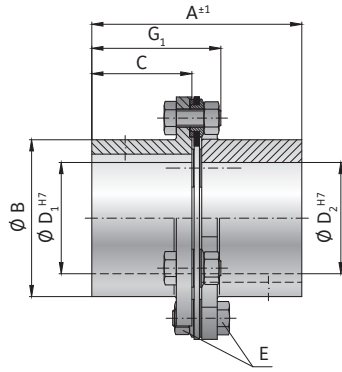


Optional XL Hub

NEW



D = dual flex design

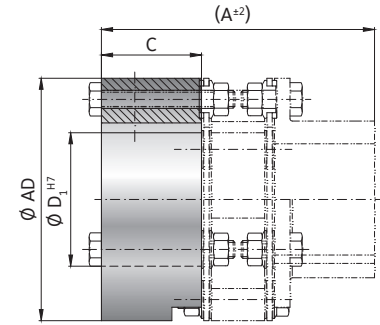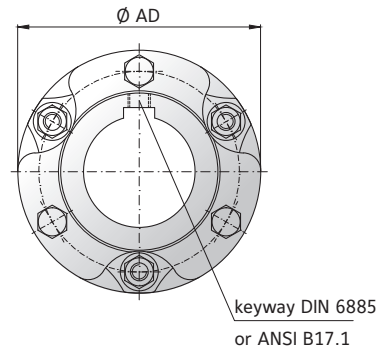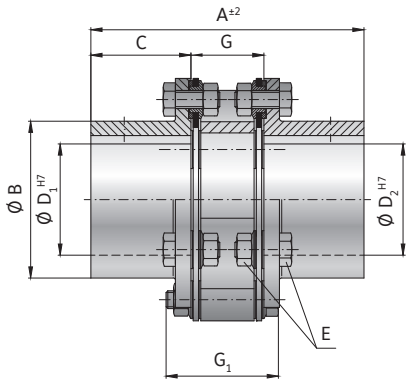

MODEL LP1 S | D | SIZE 4000 - 25000

Higher torque capacity on request

| SIZE | | | 4000 | | 6000 | | 8000 | | 15000 | | 25000 | |
|---|-------------|--|------------|------|------------|------|-------------|-------|-------------|------|------------|------------|
| Type | | | S | D | S | D | S | D | S | D | S | D |
| Rated torque (Nm) | T_{KH} | | 4,000 | | 6,000 | | 8,000 | | 15,000 | | 25,000 | |
| Maximum torque (Nm) | T_{KNmax} | | 8,000 | | 12,000 | | 16,000 | | 30,000 | | 50,000 | |
| Overall length (mm) | A | | 193 | 250 | 193 | 258 | 216 | 297 | 268 | 360 | 356 | on request |
| Outside diameter (mm) | Ø AD | | 198 | | 212 | | 238 | | 299 | | 372 | |
| Hub diameter (mm) | Ø B | | 120 | | 130 | | 140 | | 192 | | on request | |
| Hub fit length (mm) | C | | 90 | | 90 | | 100 | | 125 | | 165 | |
| Bore diameter available from Ø to Ø H7 | $D_{1/2}$ | | 38 - 90 | | 39 - 95 | | 50 - 102 | | 70 - 150 | | on request | |
| Bore diameter available from Ø to Ø H7 (XL Hub) | $D_{1/2}$ | | > 90 - 100 | | > 95 - 115 | | > 102 - 125 | | > 150 - 170 | | on request | |
| Assembly screw (ISO 4017) | E | | M16 | | M16 | | M20 | | M24 | | M36 | |
| Tensioning nut (DIN 4032) | | | 360 | | 400 | | 755 | | 1,200 | | 72 | |
| Tightening torque (Nm) | | | 360 | | 400 | | 755 | | 1,200 | | 72 | |
| Distance between hubs (mm) | G | | - | 70 | - | 78 | - | 97 | - | 110 | - | on request |
| Assembly length (mm) | G_1 | | 120 | 100 | 120 | 110 | 140 | 132.5 | 170 | 155 | on request | on request |
| Moment of inertia** (10^{-3}kgm^2) | $J_{ges.}$ | | 51 | 78 | 66 | 105 | 113 | 185 | 426 | 671 | 718 | on request |
| Weight** (kg) | | | 11.7 | 16.9 | 13.6 | 20.1 | 18.8 | 28.4 | 39.0 | 58.1 | 78 | on request |
| Torsional stiffness (10^3Nm/rad) | C_t | | 940 | | 1,140 | | 1,600 | | 2,800 | | 5,920 | |
| Axial ± (mm) | max. values | | 1.3 | 2.5 | 1.3 | 2.5 | 1.3 | 2.5 | 1.5 | 3.0 | 1.5 | 4.0 |
| Lateral ± (mm) | | | - | 0.5 | - | 0.5 | - | 0.6 | - | 0.7 | - | 0.8 |
| Angular ± (degree) | | | 0.7 | 1.4 | 0.7 | 1.4 | 0.7 | 1.4 | 0.7 | 1.4 | 0.7 | 1.4 |
| Max. speed (min^{-1}) | | | 2,900 | | 2,700 | | 2,400 | | 1,900 | | 1,500 | |
| Max. speed (balanced)*** (min^{-1}) | | | 5,600 | | 5,200 | | 4,700 | | 3,700 | | 3,000 | |

** at maximum bore diameter | *** higher speeds on request

| ORDERING EXAMPLE | LP1 | 6000 | S | 193 | 57.15 | 90 | XX |
|-----------------------|-----|------|---|-----|-------|----|--|
| Model | ● | | | | | | Special designation only (e.g. special bore diameter tolerances, balancing, etc.). Contact R+W for more information. |
| Size | | ● | | | | | |
| Type (S or D) | | | ● | | | | |
| Overall length (mm) | | | | ● | | | |
| Bore diameter Ø D1 H7 | | | | | ● | | |
| Bore diameter Ø D2 H7 | | | | | | ● | |

For custom features place an XX at the end of the part number and describe the special requirements (e.g. LP1 / 6000 / S / 193 / 57.15 / 90 / XX - F7 tolerance on D2)

LP2

WITH KEYWAY MOUNTING

350 - 5,200 Nm



PROPERTIES



FEATURES


- ▶ high torsional stiffness
- ▶ dual flex design
- ▶ customer specified length on request

MATERIAL

- ▶ **disc packs:** highly elastic spring steel
- ▶ **hubs and spacer:** high strength steel

DESIGN

Two precision machined coupling hubs and spacer mounted to the disc packs by means of high strength screws and bushings for alignment and frictional clamping of the assembly. Axial retention of the hubs on the shaft with DIN 916 set screws. From series 25,000 assembly screws/superbolts must be used.

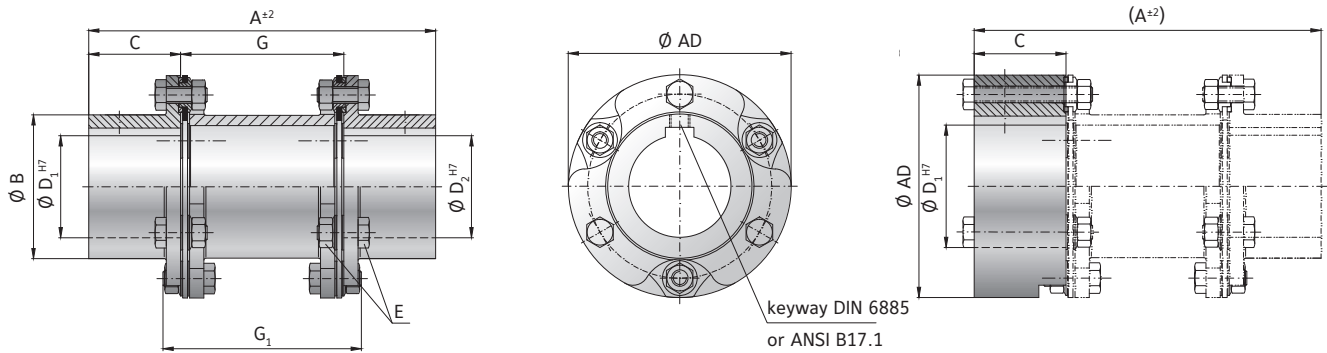

Optional XL Hub

NEW

MODEL LP2 | SIZE 300 - 2600

| SIZE | | | 300 | 500 | 700 | 1100 | 1600 | 2600 |
|---|--------------------|------------------|------------|-----------|-----------|-----------|-----------|-----------|
| Rated torque | (Nm) | T_{KN} | 350 | 500 | 700 | 1,100 | 1,600 | 2,600 |
| Maximum torque | (Nm) | T_{KNmax} | 700 | 1,000 | 1,400 | 2,200 | 3,200 | 5,200 |
| Overall length | (mm) | A | 170 | 170 | 205 | 206 | 286 | 286 |
| Outside diameter | (mm) | $\varnothing AD$ | 99 | 109 | 128 | 133 | 150 | 168 |
| Hub diameter | (mm) | $\varnothing B$ | 63 | 70.5 | 78 | 84 | 86 | 102 |
| Hub fit length | (mm) | C | 45 | 45 | 55 | 55 | 75 | 76 |
| Bore diameter available from \varnothing to $\varnothing H7$ | (mm) | $D_{1/2}$ | 18 - 48 | 23 - 50 | 25 - 58 | 25 - 60 | 28 - 64 | 31 - 75 |
| Bore diameter available from \varnothing to $\varnothing H7$ (XL Hub) | (mm) | $D_{1/2}$ | on request | > 50 - 60 | > 58 - 65 | > 60 - 70 | > 64 - 80 | > 75 - 90 |
| Assembly screw | (ISO 4017) | E | M8 | M8 | M10 | M10 | M12 | M12 |
| Tensioning nut | (DIN 4032) | | | | | | | |
| Tightening torque | (Nm) | | 35 | 40 | 65 | 95 | 150 | 165 |
| Distance between hubs | (mm) | G | 80 | 80 | 95 | 96 | 136 | 134 |
| Assembly length | (mm) | G_1 | 100 | 100 | 121 | 118 | 171 | 166 |
| Moment of inertia** | ($10^{-3}kgm^2$) | J_{ges} | 4 | 6 | 12 | 16 | 29 | 51 |
| Weight** | (kg) | | 3.1 | 4.4 | 6.1 | 7.6 | 11.5 | 15.0 |
| Torsional stiffness | ($10^3Nm/rad$) | C_T | 60 | 80 | 130 | 150 | 210 | 290 |
| Axial \pm | (mm) | max. values | 1 | 1 | 1.5 | 1.5 | 2 | 2 |
| Lateral \pm | (mm) | | 0.8 | 0.8 | 1 | 1 | 1.4 | 1.4 |
| Angular \pm | (degree) | | 1.4 | 1.4 | 1.4 | 1.4 | 1.4 | 1.4 |
| Max. speed | (min^{-1}) | | 5,800 | 5,300 | 4,500 | 4,300 | 3,800 | 3,400 |
| Max. speed (balanced)*** | (min^{-1}) | | 11,200 | 10,200 | 8,700 | 8,300 | 7,400 | 6,600 |

** at maximum bore diameter | *** higher speeds on request

| ORDERING EXAMPLE | LP2 | 500 | 170 | 25.4 | 48 | XX |
|---|-----|-----|-----|------|----|--|
| Model | ● | | | | | Special designation only (e.g. special bore diameter tolerances, balancing, etc.). Contact R+W for more information. |
| Size | | ● | | | | |
| Overall length (mm) | | | ● | | | |
| Bore diameter $\varnothing D1 H7$ | | | | ● | | |
| Bore diameter $\varnothing D2 H7$ | | | | | ● | |
| For custom features place an XX at the end of the part number and describe the special requirements (e.g. LP2 / 500 / 170 / 25.4 / 48 / XX - balanced for 10,000 rpm) | | | | | | |

LP2

WITH KEYWAY MOUNTING

4,000 – 50,000 Nm



PROPERTIES

FEATURES



- ▶ high torsional stiffness
- ▶ dual flex design
- ▶ customer specified length on request

MATERIAL

- ▶ **disc packs:** highly elastic spring steel
- ▶ **hubs and spacer:** high strength steel

DESIGN


Two precision machined coupling hubs and spacer mounted to the disc packs by means of high strength screws and bushings for alignment and frictional clamping of the assembly. Axial retention of the hubs on the shaft with DIN 916 set screws. From series 25,000 assembly screws/superbolts must be used.

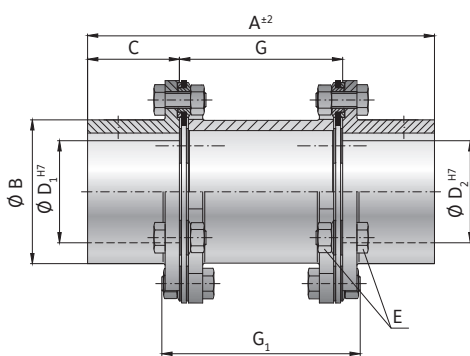

keyway DIN 6885
or ANSI B17.1

Optional XL Hub

NEW

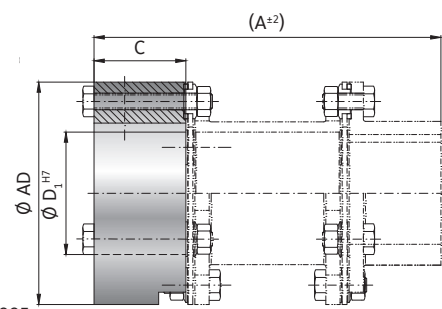

MODEL LP2 | SIZE 4000 - 25000

Higher torque capacity on request

| SIZE | | | 4000 | 6000 | 8000 | 15000 | 25000 |
|---|--------------------|------------------|------------|------------|-------------|-------------|------------|
| Rated torque | (Nm) | T_{KN} | 4,000 | 6,000 | 8,000 | 15,000 | 25,000 |
| Maximum torque | (Nm) | T_{KNmax} | 8,000 | 12,000 | 16,000 | 30,000 | 50,000 |
| Overall length | (mm) | A | 320 | 340 | 372 | 480 | on request |
| Outside diameter | (mm) | $\varnothing AD$ | 198 | 212 | 238 | 299 | 372 |
| Hub diameter | (mm) | $\varnothing B$ | 120 | 130 | 140 | 192 | on request |
| Hub fit length | (mm) | C | 90 | 90 | 100 | 125 | 165 |
| Bore diameter available from \varnothing to $\varnothing H7$ | (mm) | $D_{1/2}$ | 38 - 90 | 39 - 95 | 50 - 102 | 70 - 150 | on request |
| Bore diameter available from \varnothing to $\varnothing H7$ (XL Hub) | (mm) | $D_{1/2}$ | > 90 - 100 | > 95 - 115 | > 102 - 125 | > 150 - 170 | on request |
| Assembly screw (ISO 4017) Tensioning nut (DIN 4032) | | E | M16 | M16 | M20 | M24 | M36 |
| Tightening torque | (Nm) | | 360 | 400 | 755 | 1,200 | 72 |
| Distance between hubs | (mm) | G | 140 | 160 | 172 | 230 | on request |
| Assembly length | (mm) | G_1 | 178 | 198 | 216 | 294.2 | on request |
| Moment of inertia** | ($10^{-3}kgm^2$) | $J_{ges.}$ | 119 | 151 | 267 | 790 | on request |
| Weight** | (kg) | | 28.4 | 28.4 | 41.2 | 70.1 | on request |
| Torsional stiffness | ($10^3Nm/rad$) | C_t | 470 | 570 | 800 | 1,400 | 2,960 |
| Axial ± | (mm) | | 2.5 | 2.5 | 2.5 | 3 | 4 |
| Lateral ± | (mm) | max. values | 1.4 | 1.5 | 1.6 | 2.2 | 2.6 |
| Angular ± | (Grad) | | 1.4 | 1.4 | 1.4 | 1.4 | 1.4 |
| Max. speed | (min^{-1}) | | 2,900 | 2,700 | 2,400 | 1,900 | 1,500 |
| Max. speed (balanced)*** | (min^{-1}) | | 5,600 | 5,200 | 4,700 | 3,700 | 3,000 |

** at maximum bore diameter | *** higher speeds on request

| ORDERING EXAMPLE | LP2 | 6000 | 340 | 50.8 | 90 | XX |
|--|-----|------|-----|------|----|--|
| Model | ● | | | | | Special designation only (e.g. special bore diameter tolerances, balancing, etc.). Contact R+W for more information. |
| Size | | ● | | | | |
| Overall length (mm) | | | ● | | | |
| Bore diameter $\varnothing D1 H7$ | | | | ● | | |
| Bore diameter $\varnothing D2 H7$ | | | | | ● | |
| For custom features place an XX at the end of the part number and describe the special requirements (e.g. LP2 / 6000 / 340 / 50.8 / 90 / XX - F7 bore tolerance on D2) | | | | | | |

DISC PACK COUPLINGS
LP

LP4

WITH CONICAL CLAMPING RING; SINGLE OR DUAL FLEX 350 - 50,000 Nm

S = single flex design



PROPERTIES

FEATURES

- ▶ extremely high torsional stiffness
- ▶ good for reversing loads
- ▶ compensates for axial and angular misalignment only

MATERIAL

- ▶ **disc pack:** highly elastic spring steel
- ▶ **hubs:** high strength steel

DESIGN

Two precision machined coupling hubs with conical clamping ring mounted to the disc pack by means of high strength screws and bushings for alignment and frictional clamping of the assembly.

From series 25,000 assembly screws/superbolts must be used.

D = dual flex design



PROPERTIES

FEATURES

- ▶ high torsional stiffness
- ▶ good for reversing loads
- ▶ compensates for axial, angular and lateral misalignment

MATERIAL

- ▶ **disc packs:** highly elastic spring steel
- ▶ **hubs and spacer:** high strength steel

DESIGN

Two precision machined coupling hubs with conical clamping ring and spacer plate mounted to the disc packs by means of high strength screws and bushings for alignment and frictional clamping of the assembly.

NEW

MODEL LP4 S|D | SIZE 300 - 2600


| SIZE | | | 300 | | 500 | | 700 | | 1100 | | 1600 | | 2600 | |
|---|------------------|--|---------|------|---------|------|---------|------|---------|------|---------|------|---------|------|
| Type | | | S | D | S | D | S | D | S | D | S | D | S | D |
| Rated torque* (Nm) | T_{KN} | | 350 | | 500 | | 700 | | 1,100 | | 1,600 | | 2,600 | |
| Maximum torque* (Nm) | T_{KNmax} | | 700 | | 1,000 | | 1,400 | | 2,200 | | 3,200 | | 5,200 | |
| Overall length (mm) | A | | 76 | 104 | 76 | 104 | 93 | 131 | 99 | 140 | 120 | 166 | 136 | 183 |
| Outside diameter (mm) | $\varnothing AD$ | | 99 | | 109 | | 128 | | 133 | | 150 | | 168 | |
| Hub diameter (mm) | $\varnothing B$ | | 95 | | 105 | | 122 | | 130 | | 146 | | 165 | |
| Hub fit length (mm) | C | | 35.5 | | 35.5 | | 43.5 | | 46 | | 56 | | 63.5 | |
| Bore diameter available from \varnothing to $\varnothing H7$ (mm) | $D_{1/2}$ | | 24 - 50 | | 24 - 55 | | 30 - 65 | | 30 - 65 | | 35 - 70 | | 35 - 85 | |
| Assembly screw (ISO 4017) Tensioning nut (DIN 4032) | E | | M8 | | M8 | | M10 | | M10 | | M12 | | M12 | |
| Tightening torque (Nm) | | | 35 | | 40 | | 65 | | 95 | | 150 | | 165 | |
| Distance between hubs (mm) | G | | - | 33 | - | 33 | - | 44 | - | 48 | - | 54 | - | 56 |
| Assembly length (mm) | G_1 | | 50.5 | 50.3 | 50.5 | 50.3 | 62.5 | 66.4 | 64 | 66.4 | 81 | 77.5 | 88.5 | 77.5 |
| Clamping screw (ISO 4017) | H | | 6 x M8 | | 6 x M8 | | 6 x M10 | | 6x M10 | | 6 x M12 | | 6 x M12 | |
| Tightening torque (Nm) | | | 20 | | 26 | | 39 | | 61 | | 98 | | 140 | |
| Moment of inertia** ($10^{-3}kgm^2$) | $J_{ges.}$ | | 3 | 4 | 5 | 7 | 12 | 15 | 16 | 20 | 31 | 38 | 89 | 71 |
| Weight** (kg) | | | 2.4 | 3.1 | 3.0 | 3.9 | 5.1 | 6.6 | 6.1 | 7.9 | 9.7 | 12.1 | 14.4 | 17.5 |
| Torsional stiffness ($10^3Nm/rad$) | C_T | | 120 | 60 | 160 | 80 | 260 | 130 | 300 | 150 | 420 | 210 | 580 | 290 |
| Axial \pm (mm) | max. values | | 0.5 | 1.0 | 0.6 | 1.0 | 0.7 | 1.5 | 0.8 | 1.5 | 1.0 | 2.0 | 1.1 | 2.0 |
| Lateral \pm (mm) | | | - | 0.2 | - | 0.2 | - | 0.3 | - | 0.3 | - | 0.4 | - | 0.4 |
| Angular \pm (degree) | | | 0.7 | 1.4 | 0.7 | 1.4 | 0.7 | 1.4 | 0.7 | 1.4 | 0.7 | 1.4 | 0.7 | 1.4 |
| Max. speed (min ⁻¹) | | | 5,800 | | 5,300 | | 4,500 | | 4,300 | | 3,800 | | 3,400 | |
| Max. speed (balanced)*** (min ⁻¹) | | | 11,200 | | 10,200 | | 8,700 | | 8,300 | | 7,400 | | 6,600 | |

* maximum transmittable torque depends on the bore diameter | ** at maximum bore diameter | *** higher speeds on request


| SIZE | $\varnothing 24$ | $\varnothing 26$ | $\varnothing 30$ | $\varnothing 35$ | $\varnothing 40$ | $\varnothing 45$ | $\varnothing 50$ | $\varnothing 55$ | $\varnothing 60$ | $\varnothing 70$ | $\varnothing 80$ | $\varnothing 90$ | $\varnothing 100$ | $\varnothing 110$ | $\varnothing 120$ | $\varnothing 130$ | $\varnothing 140$ | $\varnothing 160$ | $\varnothing 180$ |
|-------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| 300 | 330 | 360 | 420 | 490 | 560 | 630 | 700 | | | | | | | | | | | | |
| 500 | 430 | 470 | 540 | 640 | 730 | 820 | 910 | 1000 | | | | | | | | | | | |
| 700 | | | 650 | 760 | 870 | 980 | 1090 | 1200 | 1310 | | | | | | | | | | |
| 1100 | | | 1020 | 1190 | 1370 | 1540 | 1710 | 1880 | 2050 | | | | | | | | | | |
| 1600 | | | | 1610 | 1840 | 2070 | 2300 | 2530 | 2760 | 3200 | | | | | | | | | |
| 2600 | | | | 2300 | 2620 | 2950 | 3280 | 3610 | 3940 | 4600 | 5200 | | | | | | | | |
| 4000 | | | | | | | 4000 | 4400 | 4800 | 5600 | 6400 | 7200 | 8000 | | | | | | |
| 6000 | | | | | | | 5400 | 6000 | 6500 | 7600 | 8700 | 9800 | 10900 | 12000 | | | | | |
| 8000 | | | | | | | | | 8300 | 9700 | 11100 | 12500 | 13900 | 15300 | | | | | |
| 15000 | | | | | | | | | | 12000 | 14000 | 15500 | 17500 | 19000 | 21000 | 22500 | 24500 | 28000 | |
| 25000 | | | | | | | | | | | | 28000 | 30500 | 33500 | 36000 | 39000 | 44500 | 50000 | |

Higher torque capacity possible with keyway or spline on request.

S = single flex design

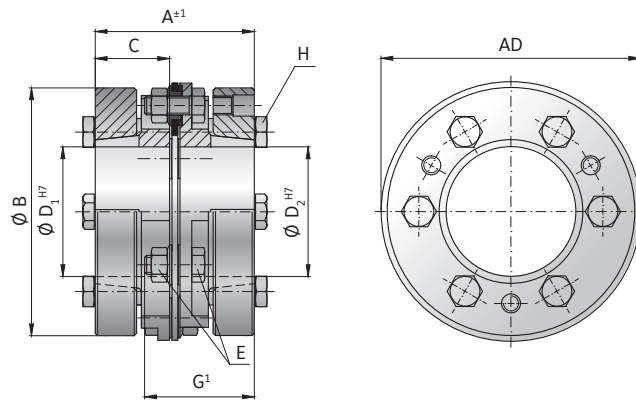

D = dual flex design

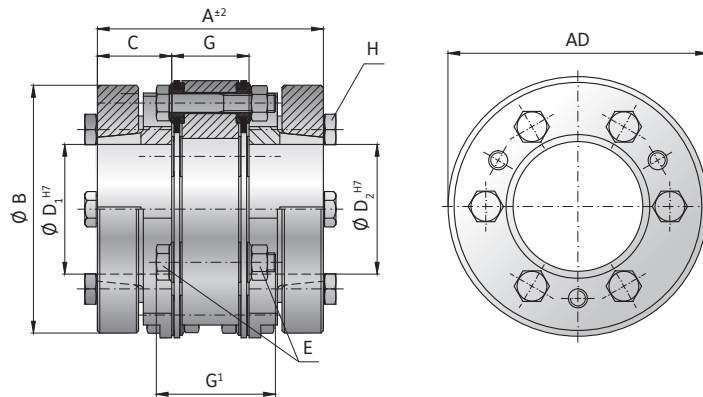

MODEL LP4 S | D | SIZE 4000 - 25000

| SIZE | | | 4000 | | 6000 | | 8000 | | 15000 | | 25000 | |
|--|----------------------------|-------------|----------|------|----------|------|----------|-------|----------|-------|------------|------------|
| Type | | | S | D | S | D | S | D | S | D | S | D |
| Rated torque* | (Nm) | T_{KN} | 4,000 | | 6,000 | | 8,000 | | 15,000 | | 25,000 | |
| Maximum torque* | (Nm) | T_{KNmax} | 8,000 | | 12,000 | | 16,000 | | 30,000 | | 50,000 | |
| Overall length | (mm) | A | 161 | 218 | 174 | 239 | 226 | 307 | 264 | 356 | 274 | on request |
| Outside diameter | (mm) | Ø AD | 198 | | 212 | | 238 | | 299 | | 372 | |
| Hub diameter | (mm) | Ø B | 184 | | 205 | | 230 | | 285 | | on request | |
| Hub fit length | (mm) | C | 74 | | 80.5 | | 105 | | 123 | | 124 | |
| Bore diameter available from Ø to Ø H7 | (mm) | $D_{1/2}$ | 50 - 100 | | 50 - 110 | | 60 - 115 | | 70 - 170 | | on request | |
| Assembly screw (ISO 4017) Tensioning nut (DIN 4032) | | E | M16 | | M16 | | M20 | | M24 | | M36 | |
| Tightening torque | (Nm) | | 360 | | 400 | | 755 | | 1,200 | | 72 | |
| Distance between hubs | (mm) | G | - | 70 | - | 78 | - | 97 | - | 110 | - | on request |
| Assembly length | (mm) | G_1 | 106 | 100 | 112.5 | 110 | 148 | 142.5 | 173 | 155 | on request | on request |
| Clamping screw (ISO 4017) | | H | 6 x M16 | | 6 x M16 | | 6 x M20 | | 6 x M20 | | 6 x M24 | |
| Tightening torque | (Nm) | | 225 | | 400 | | 490 | | 620 | | 1.180 | |
| Moment of inertia** | (10^{-3}kgm^2) | $J_{ges.}$ | 110 | 137 | 172 | 211 | 368 | 440 | 1,003 | 1,248 | 1,469 | on request |
| Weight** | (kg) | | 19.9 | 25.1 | 25.9 | 32.4 | 45.4 | 54.9 | 73.3 | 92.3 | 116 | on request |
| Torsional stiffness | (10^3Nm/rad) | C_T | 940 | 470 | 1.140 | 570 | 1.600 | 800 | 2,800 | 1,400 | 5,920 | 2,960 |
| Axial ± | (mm) | max. values | 1.3 | 2.5 | 1.3 | 2.5 | 1.3 | 2.5 | 1.5 | 3.0 | 1.5 | 4.0 |
| Lateral ± | (mm) | | - | 0.5 | - | 0.5 | - | 0.6 | - | 0.7 | - | 0.8 |
| Angular ± | (degree) | | 0.7 | 1.4 | 0.7 | 1.4 | 0.7 | 1.4 | 0.7 | 1.4 | 0.7 | 1.4 |
| Max. speed | (min^{-1}) | | 2,900 | | 2,700 | | 2,400 | | 1,900 | | 1,500 | |
| Max. speed (balanced)*** | (min^{-1}) | | 5,600 | | 5,200 | | 4,700 | | 3,700 | | 3,000 | |

* maximum transmittable torque depends on the bore diameter | ** at maximum bore diameter | *** higher speeds on request

| ORDERING EXAMPLE | LP4 | 6000 | D | 239 | 55 | 80 | XX |
|--|-----|------|---|-----|----|----|--|
| Model | ● | | | | | | Special designation only (e.g. special bore diameter tolerances, balancing, etc.). Contact R+W for more information. |
| Size | | ● | | | | | |
| Type (S or D) | | | ● | | | | |
| Overall length (mm) | | | | ● | | | |
| Bore diameter Ø D1 H7 | | | | | ● | | |
| Bore diameter Ø D2 H7 | | | | | | ● | |
| For custom features place an XX at the end of the part number and describe the special requirements (e.g. LP4 / 6000 / D / 239 / 55 / 80 / XX - F7 bore tolerance on D2) | | | | | | | |

LP3

WITH CONICAL CLAMPING RING

350 - 5,200 Nm



PROPERTIES



FEATURES


- ▶ high torsional stiffness
- ▶ customer specified length on request
- ▶ good for reversing loads

MATERIAL

- ▶ **disc packs:** highly elastic spring steel
- ▶ **hubs and spacer:** high strength steel

DESIGN

Two precision machined coupling hubs with conical clamping ring and spacer mounted to the disc packs by means of high strength screws and bushings for alignment and frictional clamping of the assembly.
From series 25,000 assembly screws/superbolts must be used.

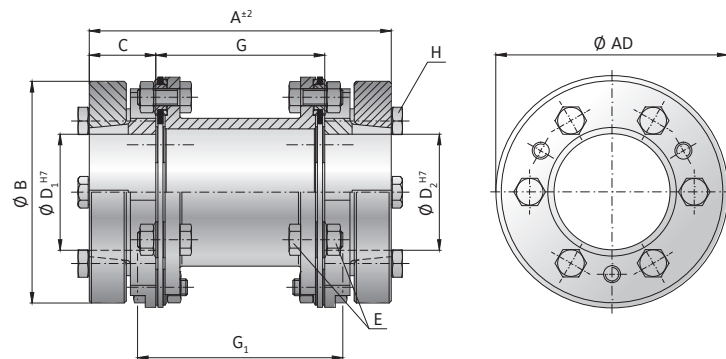

MODEL LP3 | SIZE 300 - 2600

| SIZE | | | 300 | 500 | 700 | 1100 | 1600 | 2600 |
|--|----------------------------|------------------|---------|---------|---------|---------|---------|---------|
| Rated torque* | (Nm) | T_{KN} | 350 | 500 | 700 | 1,100 | 1,600 | 2,600 |
| Maximum torque* | (Nm) | T_{KNmax} | 700 | 1,000 | 1,400 | 2,200 | 3,200 | 5,200 |
| Overall length | (mm) | A | 151 | 151 | 182 | 188 | 248 | 261 |
| Outside diameter | (mm) | $\varnothing AD$ | 99 | 109 | 128 | 133 | 150 | 168 |
| Hub diameter | (mm) | $\varnothing B$ | 95 | 105 | 122 | 130 | 146 | 165 |
| Hub fit length | (mm) | C | 35.5 | 35.5 | 43.5 | 46 | 56 | 63.5 |
| Bore diameter available from \varnothing to $\varnothing H7$ | (mm) | $D_{1/2}$ | 24 - 50 | 24 - 55 | 30 - 65 | 30 - 65 | 35 - 70 | 35 - 85 |
| Assembly screw (ISO 4017) / Tensioning nut (DIN 4032) | | E | M8 | M8 | M10 | M10 | M12 | M12 |
| Tightening torque | (Nm) | | 35 | 40 | 65 | 95 | 150 | 165 |
| Distance between hubs | (mm) | G | 80 | 80 | 95 | 96 | 136 | 134 |
| Assembly length | (mm) | G_1 | 100 | 100 | 121 | 118 | 170 | 166 |
| Clamping screw | (ISO 4017) | H | 6 x M8 | 6 x M8 | 6 x M10 | 6 x M10 | 6 x M12 | 6 x M12 |
| Tightening torque | (Nm) | | 20 | 26 | 39 | 61 | 98 | 140 |
| Moment of inertia** | (10^{-3}kgm^2) | $J_{ges.}$ | 5 | 7 | 16 | 21 | 41 | 76 |
| Weight** | (kg) | | 3.5 | 4.5 | 7.0 | 8.4 | 13.5 | 19.1 |
| Torsional stiffness | (10^3Nm/rad) | C_T | 60 | 80 | 130 | 150 | 210 | 290 |
| Axial \pm | (mm) | | 1 | 1 | 1.5 | 1.5 | 2 | 2 |
| Lateral \pm | (mm) | max. values | 0.8 | 0.8 | 1 | 1 | 1.4 | 1.4 |
| Angular \pm | (degree) | | 1.4 | 1.4 | 1.4 | 1.4 | 1.4 | 1.4 |
| Max. speed | (min^{-1}) | | 5,800 | 5,300 | 4,500 | 4,300 | 3,800 | |
| Max. speed (balanced)*** | (min^{-1}) | | 11,200 | 10,200 | 8,700 | 8,300 | 7,400 | 6,600 |

* maximum transmittable torque depends on the bore diameter | ** at maximum bore diameter | *** higher speeds on request

| SIZE | $\varnothing 24$ | $\varnothing 26$ | $\varnothing 30$ | $\varnothing 35$ | $\varnothing 40$ | $\varnothing 45$ | $\varnothing 50$ | $\varnothing 55$ | $\varnothing 60$ | $\varnothing 70$ | $\varnothing 80$ | $\varnothing 90$ | $\varnothing 100$ | $\varnothing 110$ | $\varnothing 120$ | $\varnothing 130$ | $\varnothing 140$ | $\varnothing 160$ | $\varnothing 180$ |
|-------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| 300 | 330 | 360 | 420 | 490 | 560 | 630 | 700 | | | | | | | | | | | | |
| 500 | 430 | 470 | 540 | 640 | 730 | 820 | 910 | 1000 | | | | | | | | | | | |
| 700 | | | 650 | 760 | 870 | 980 | 1090 | 1200 | 1310 | | | | | | | | | | |
| 1100 | | | 1020 | 1190 | 1370 | 1540 | 1710 | 1880 | 2050 | | | | | | | | | | |
| 1600 | | | | 1610 | 1840 | 2070 | 2300 | 2530 | 2760 | 3200 | | | | | | | | | |
| 2600 | | | | 2300 | 2620 | 2950 | 3280 | 3610 | 3940 | 4600 | 5200 | | | | | | | | |
| 4000 | | | | | | | 4000 | 4400 | 4800 | 5600 | 6400 | 7200 | 8000 | | | | | | |
| 6000 | | | | | | | 5400 | 6000 | 6500 | 7600 | 8700 | 9800 | 10900 | 12000 | | | | | |
| 8000 | | | | | | | | | 8300 | 9700 | 11100 | 12500 | 13900 | 15300 | | | | | |
| 15000 | | | | | | | | | | 12000 | 14000 | 15500 | 17500 | 19000 | 21000 | 22500 | 24500 | 28000 | |
| 25000 | | | | | | | | | | | | | 28000 | 30500 | 33500 | 36000 | 39000 | 44500 | 50000 |

Higher torque capacity possible with keyway or spline on request.

LP3

WITH CONICAL CLAMPING RING

4,000 – 50,000 Nm



PROPERTIES



FEATURES


- ▶ high torsional stiffness
- ▶ customer specified length on request
- ▶ good for reversing loads

MATERIAL

- ▶ **disc packs:** highly elastic spring steel
- ▶ **hubs and spacer:** high strength steel

DESIGN

Two precision machined coupling hubs with conical clamping ring and spacer mounted to the disc packs by means of high strength screws and bushings for alignment and frictional clamping of the assembly.
From series 25,000 assembly screws/superbolts must be used.

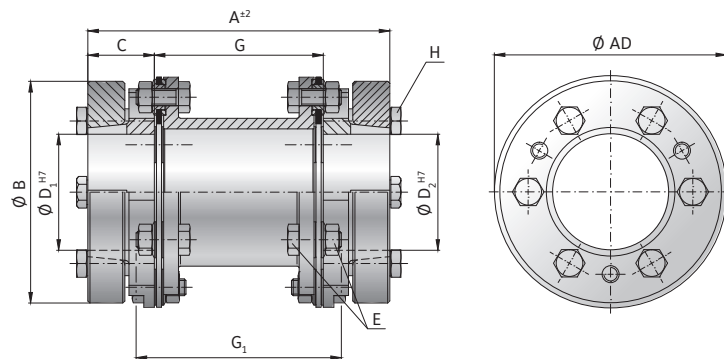

MODEL LP3 | SIZE 4000 - 25000

| SIZE | | | 4000 | 6000 | 8000 | 15000 | 25000 |
|--|--------------------------------------|--------------------|----------|----------|----------|----------|------------|
| Rated torque* | (Nm) | T _{KN} | 4,000 | 6,000 | 8,000 | 15,000 | 25,000 |
| Maximum torque* | (Nm) | T _{KNmax} | 8,000 | 12,000 | 16,000 | 30,000 | 50,000 |
| Overall length | (mm) | A | 288 | 321 | 382 | 476 | on request |
| Outside diameter | (mm) | Ø AD | 198 | 212 | 238 | 299 | 372 |
| Hub diameter | (mm) | Ø B | 184 | 205 | 230 | 285 | on request |
| Hub fit length | (mm) | C | 74 | 80.5 | 105 | 123 | 124 |
| Bore diameter available from Ø to Ø H7 | (mm) | D _{1/2} | 50 - 100 | 50 - 110 | 60 - 115 | 70 - 170 | on request |
| Assembly screw (ISO 4017) | | E | M16 | M16 | M20 | M24 | M36 |
| Tensioning nut (DIN 4032) | | | | | | | |
| Tightening torque | (Nm) | | 360 | 400 | 755 | 1,200 | 72 |
| Distance between hubs | (mm) | G | 140 | 160 | 172 | 230 | on request |
| Assembly length | (mm) | G ₁ | 178 | 198 | 226 | 295 | on request |
| Clamping screw (ISO 4017) | | H | 6 x M16 | 6 x M16 | 6 x M20 | 6 x M20 | 6 x M24 |
| Tightening torque | (Nm) | | | | | | |
| Moment of inertia** | (10 ⁻³ kgm ²) | J _{ges.} | 149 | 225 | 456 | 1,344 | on request |
| Weight** | (kg) | | 27.9 | 34.9 | 57.7 | 99.9 | on request |
| Torsional stiffness | (10 ³ Nm/rad) | C _T | 470 | 570 | 800 | 1,400 | 2,960 |
| Axial ± | (mm) | max. values | 2.5 | 2.5 | 2.5 | 3 | 4 |
| Lateral ± | (mm) | | 1.4 | 1.5 | 1.6 | 2.2 | 2.6 |
| Angular ± | (degree) | | 1.4 | 1.4 | 1.4 | 1.4 | 1.4 |
| Max. speed | (min ⁻¹) | | 2,900 | 2,700 | 2,400 | 1,900 | 1,500 |
| Max. speed (balanced)*** | (min ⁻¹) | | 5,600 | 5,200 | 4,700 | 3,700 | 3,000 |

* maximum transmittable torque depends on the bore diameter | ** at maximum bore diameter | *** higher speeds on request

| ORDERING EXAMPLE | LP3 | 6000 | 321 | 50.8 | 75 | XX |
|-----------------------|-----|------|-----|------|----|---|
| Model | ● | | | | | Sonderanfertigungen (z.B. andere Gesamtlänge) on request möglich. |
| Size | | ● | | | | |
| Overall length (mm) | | | ● | | | |
| Bore diameter Ø D1 H7 | | | | ● | | |
| Bore diameter Ø D2 H7 | | | | | ● | |

For custom features place an XX at the end of the part number and describe the special requirements (e.g. LP3 / 6000 / 321 / 50.8 / 75 / XX - F7 bore tolerance on D2)

DISC PACK COUPLINGS LP

LP5

WITH CLAMPING HUB; SINGLE OR DUAL FLEX 350 - 50,000 Nm

S = single flex design



NEW

D = dual flex design



NEW

PROPERTIES

FEATURES

- ▶ easy installation
- ▶ keyway optional
- ▶ compensates for axial and angular misalignment only

MATERIAL

- ▶ **disc pack:** highly elastic spring steel
- ▶ **hubs:** high strength steel

DESIGN

Two precision machined split clamping hubs mounted to the disc pack by means of high strength screws and bushings for alignment and frictional clamping of the assembly.

From series 25,000 assembly screws/superbolts must be used.

PROPERTIES

FEATURES

- ▶ easy installation
- ▶ keyway optional
- ▶ compensates for axial, angular and lateral misalignment

MATERIAL

- ▶ **disc packs:** highly elastic spring steel
- ▶ **hubs and spacer:** high strength steel

DESIGN

Two precision machined split clamping hubs and spacer plate mounted to the disc packs by means of high strength screws and bushings for alignment and frictional clamping of the assembly.

MODEL LP5 S|D | SIZE 300 - 2600


| SIZE | | | 300 | | 500 | | 700 | | 1100 | | 1600 | | 2600 | |
|---|------------------|--|------------|------|---------|------|------------|------|------------|------|---------|------|---------|------|
| Type | | | S | D | S | D | S | D | S | D | S | D | S | D |
| Rated torque* (Nm) | T_{KN} | | 350 | | 500 | | 700 | | 1,100 | | 1,600 | | 2,600 | |
| Maximum torque* (Nm) | T_{KNmax} | | 700 | | 1,000 | | 1,400 | | 2,200 | | 3,200 | | 5,200 | |
| Overall length (mm) | A | | on request | | 108 | 137 | on request | | on request | | 178 | 224 | 189 | 236 |
| Outside diameter (mm) | $\varnothing AD$ | | 99 | | 109 | | 128 | | 133 | | 150 | | 168 | |
| Hub diameter (mm) | $\varnothing B$ | | 72 | | 80 | | 89 | | 95 | | 103 | | 122 | |
| Hub fit length (mm) | C | | 43 | | 52 | | on request | | on request | | 85 | | 90 | |
| Bore diameter available from \varnothing to $\varnothing H7$ (mm) | $D_{1/2}$ | | 18 - 48 | | 23 - 50 | | 25 - 58 | | 25 - 60 | | 28 - 64 | | 31 - 75 | |
| Assembly screw (ISO 4017) Tensioning nut (DIN 4032) | E | | M8 | | M8 | | M10 | | M10 | | M12 | | M12 | |
| Tightening torque (Nm) | | | 35 | | 40 | | 65 | | 95 | | 150 | | 165 | |
| Distance between hubs (mm) | G | | - | 33 | - | 33 | - | 44 | - | 48 | - | 54 | - | 56 |
| Assembly length (mm) | G_1 | | 59 | 50.3 | 68 | 50.3 | 84 | 66.4 | 94 | 66.4 | 113 | 77.5 | 119 | 77.5 |
| Clamping screw (ISO 4762) | H | | 4 x M6 | | 4 x M8 | | 4 x M8 | | 4 x M10 | | 4 x M12 | | 4 x M14 | |
| Tightening torque (Nm) | | | 18 | | 34 | | 39 | | 73 | | 120 | | 192 | |
| Moment of inertia** ($10^{-3}kgm^2$) | $J_{ges.}$ | | 2 | 3 | 4 | 5 | 8 | 11 | 11 | 15 | 20 | 27 | 38 | 50 |
| Weight** (kg) | | | 1.8 | 2.5 | 2.8 | 3.7 | 4.3 | 6.0 | 5.5 | 7.4 | 8.4 | 10.6 | 12.0 | 15.1 |
| Torsional stiffness ($10^3Nm/rad$) | C_T | | 120 | 60 | 160 | 80 | 260 | 130 | 300 | 150 | 420 | 210 | 580 | 290 |
| Axial \pm (mm) | max. values | | 0.5 | 1.0 | 0.6 | 1.0 | 0.7 | 1.5 | 0.8 | 1.5 | 1.0 | 2.0 | 1.1 | 2.0 |
| Lateral \pm (mm) | | | - | 0.2 | - | 0.2 | - | 0.3 | - | 0.3 | - | 0.4 | - | 0.4 |
| Angular \pm (degree) | | | 0.7 | 1.4 | 0.7 | 1.4 | 0.7 | 1.4 | 0.7 | 1.4 | 0.7 | 1.4 | 0.7 | 1.4 |
| Max. speed (min^{-1}) | | | 5,800 | | 5,300 | | 4,500 | | 4,300 | | 3,800 | | 3,400 | |
| Max. speed (balanced)*** (min^{-1}) | | | 11,200 | | 10,200 | | 8,700 | | 8,300 | | 7,400 | | 6,600 | |

* maximum transmittable torque depends on the bore diameter | ** at maximum bore diameter | *** higher speeds on request


| SIZE | $\varnothing 18$ | $\varnothing 20$ | $\varnothing 23$ | $\varnothing 25$ | $\varnothing 30$ | $\varnothing 35$ | $\varnothing 40$ | $\varnothing 45$ | $\varnothing 50$ | $\varnothing 55$ | $\varnothing 60$ | $\varnothing 70$ | $\varnothing 80$ | $\varnothing 90$ | $\varnothing 100$ | $\varnothing 120$ | $\varnothing 140$ | $\varnothing 150$ | $\varnothing 160$ | |
|-------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------|
| 300 | 170 | 190 | 220 | 240 | 290 | 340 | 390 | 430 | | | | | | | | | | | | |
| 500 | | | 310 | 330 | 400 | 470 | 530 | 600 | 650 | | | | | | | | | | | |
| 700 | | | | 390 | 470 | 550 | 630 | 710 | 790 | 870 | | | | | | | | | | |
| 1100 | | | | 590 | 710 | 830 | 950 | 1070 | 1190 | 1300 | 1430 | | | | | | | | | |
| 1600 | | | | | 980 | 1150 | 1310 | 1470 | 1640 | 1800 | 1970 | | | | | | | | | |
| 2600 | | | | | | 1580 | 1800 | 2030 | 2250 | 2480 | 2700 | 3160 | | | | | | | | |
| 4000 | | | | | | | | 2300 | 2600 | 2800 | 3100 | 3400 | 4000 | 4600 | 5200 | | | | | |
| 6000 | | | | | | | | 3200 | 3600 | 4100 | 4500 | 4900 | 5700 | 6500 | 7300 | | | | | |
| 8000 | | | | | | | | | | 5100 | 8600 | 6100 | 7100 | 8100 | 9200 | 10200 | | | | |
| 15000 | | | | | | | | | | | | | 9000 | 10000 | 11500 | 13000 | 15500 | 18000 | 19500 | |
| 25000 | | | | | | | | | | | | | | | | 19000 | 23000 | 26500 | 28500 | 30500 |

Higher torque capacity possible with keyway or spline on request.

S = single flex design

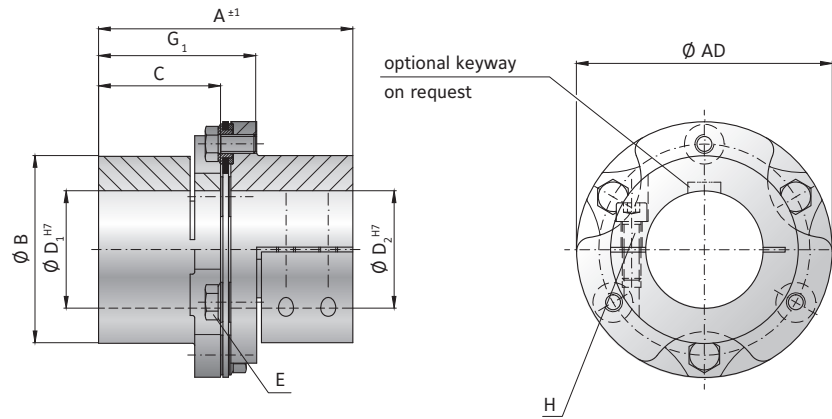

D = dual flex design

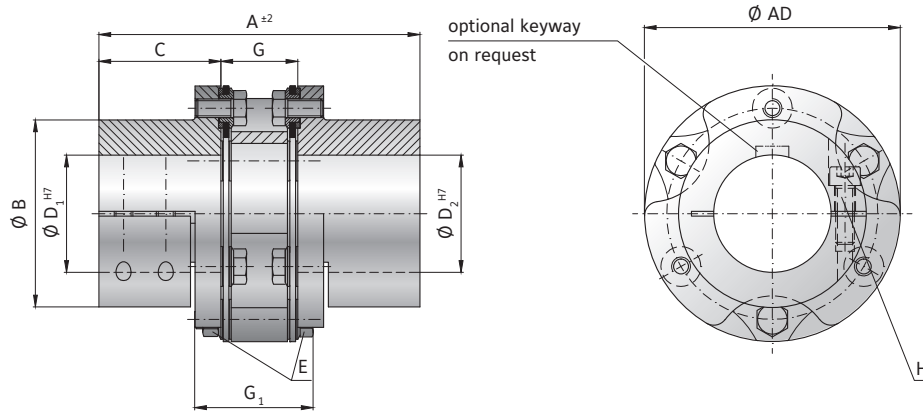

MODEL LP5 S | D | SIZE 4000 - 25000

| SIZE | | | 4000 | | 6000 | | 8000 | | 15000 | | 25000 | |
|--|--------------------|-------------|---------|------|------------|------|------------|-------|----------|-------|------------|------------|
| Type | | | S | D | S | D | S | D | S | D | S | D |
| Rated torque* | (Nm) | T_{KN} | 4,000 | | 6,000 | | 8,000 | | 15,000 | | 25,000 | |
| Maximum torque* | (Nm) | T_{KNmax} | 8,000 | | 12,000 | | 16,000 | | 30,000 | | 50,000 | |
| Overall length | (mm) | A | 217 | 274 | on request | | on request | | 328 | 420 | 392 | on request |
| Outside diameter | (mm) | Ø AD | 198 | | 212 | | 238 | | 299 | | 372 | |
| Hub diameter | (mm) | Ø B | 137 | | 151 | | 168 | | 220 | | on request | |
| Hub fit length | (mm) | C | 102 | | on request | | on request | | 155 | | 183 | |
| Bore diameter available from Ø to Ø H7 | (mm) | $D_{1/2}$ | 38 - 90 | | 39 - 95 | | 50 - 102 | | 70 - 150 | | on request | |
| Assembly screw (ISO 4017) | | E | M16 | | M16 | | M20 | | M24 | | M36 | |
| Tensioning nut (DIN 4032) | | | 360 | | 400 | | 755 | | 1,200 | | 72 | |
| Tightening torque | (Nm) | | 360 | | 400 | | 755 | | 1,200 | | 72 | |
| Distance between hubs | (mm) | G | - | 70 | - | 78 | - | 97 | - | 110 | - | on request |
| Assembly length | (mm) | G_1 | 140.8 | 100 | 151 | 110 | 174 | 132.5 | 212 | 155 | on request | on request |
| Clamping screw (ISO 4762) | | H | 4 x M14 | | 4 x M16 | | 4 x M20 | | 8 x M20 | | 8 x M24 | |
| Tightening torque | (Nm) | | | 246 | | 395 | | 615 | | 680 | | 1,200 |
| Moment of inertia** | ($10^{-3}kgm^2$) | J_{ges} | 75 | 103 | 106 | 145 | 207 | 279 | 658 | 904 | 1.147 | on request |
| Weight** | (kg) | | 17.3 | 22.5 | 21.9 | 28.4 | 33.8 | 43.4 | 61.2 | 80.3 | on request | on request |
| Torsional stiffness | ($10^3Nm/rad$) | C_T | 940 | 470 | 1140 | 570 | 1600 | 800 | 2,800 | 1,400 | 5,920 | 2,960 |
| Axial ± | (mm) | max, values | 1.3 | 2.5 | 1.3 | 2.5 | 1.3 | 2.5 | 1.5 | 3.0 | 1.5 | 4.0 |
| Lateral ± | (mm) | | - | 0.5 | - | 0.5 | - | 0.6 | - | 0.7 | - | 0.8 |
| Angular ± | (degree) | | 0.7 | 1.4 | 0.7 | 1.4 | 0.7 | 1.4 | 0.7 | 1.4 | 0.7 | 1.4 |
| Max, speed | (min^{-1}) | | 2,900 | | 2,700 | | 2,400 | | 1,900 | | 1,500 | |
| Max, speed (balanced)*** | (min^{-1}) | | 5,600 | | 5,200 | | 4,700 | | 3,700 | | 3,000 | |

* maximum transmittable torque depends on the bore diameter | ** at maximum bore diameter | *** higher speeds on request

| ORDERING EXAMPLE | LP5 | 700 | S | 133 | 25.4 | 40 | XX |
|--|-----|-----|---|-----|------|----|--|
| Model | ● | | | | | | Special designation only (e.g. special bore diameter tolerances, balancing, etc.). Contact R+W for more information. |
| Size | | ● | | | | | |
| Type (S or D) | | | ● | | | | |
| Overall length (mm) | | | | ● | | | |
| Bore diameter Ø D1 H7 | | | | | ● | | |
| Bore diameter Ø D2 H7 | | | | | | ● | |
| For custom features place an XX at the end of the part number and describe the special requirements (e.g. LP5 / 700 / S / 133 / 25.4 / 40 / XX - balanced to 10,000 rpm) | | | | | | | |

LPH

WITH FULLY SPLIT CLAMPING HUB

350 - 5,200 Nm



NEW

PROPERTIES

FEATURES


- ▶ lateral mounting between shafts
- ▶ easy installation and removal
- ▶ dual flex design

MATERIAL

- ▶ **disc packs:** highly elastic spring steel
- ▶ **hubs and spacer:** high strength steel

DESIGN

Two precision machined fully split clamping hubs and spacer plate mounted to the disc pack by means of high strength screws and bushings for alignment and frictional clamping of the assembly. From series 25,000 assembly screws/superbolts must be used.

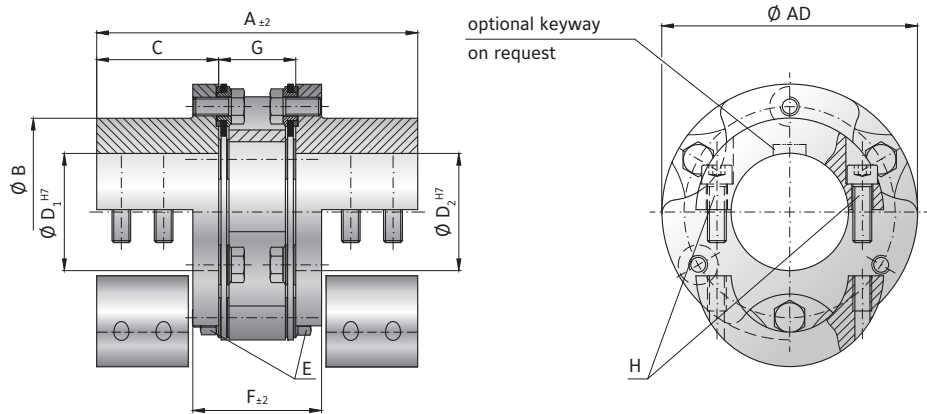

MODEL LPH D | SIZE 300 - 2600

| SIZE | | | 300 | 500 | 700 | 1100 | 1600 | 2600 |
|--|--------------------|-------------|---------|---------|---------|---------|---------|---------|
| Rated torque* | (Nm) | T_{KN} | 350 | 500 | 700 | 1,100 | 1,600 | 2,600 |
| Maximum torque* | (Nm) | T_{KNmax} | 700 | 1,000 | 1,400 | 2,200 | 3,200 | 5,200 |
| Overall length | (mm) | A | 119 | 137 | 172 | 192 | 224 | 236 |
| Outside diameter | (mm) | ϕAD | 99 | 109 | 128 | 133 | 150 | 168 |
| Hub diameter | (mm) | ϕB | 72 | 80 | 89 | 95 | 100 | 116.5 |
| Hub fit length | (mm) | C | 43 | 52 | 64 | 72 | 85 | 90 |
| Bore diameter available from ϕ to $\phi H7$ | (mm) | $D_{1/2}$ | 18 - 48 | 23 - 50 | 25 - 58 | 25 - 60 | 28 - 64 | 31 - 75 |
| Assembly screw Tensioning nut (ISO 4017) (DIN 4032) | | E | M8 | M8 | M10 | M10 | M12 | M12 |
| Tightening torque | (Nm) | | 35 | 40 | 65 | 95 | 150 | 165 |
| Length of center section | (mm) | F | 58 | 58 | 74 | 80 | 96 | 98 |
| Distance between hubs | (mm) | G | 33 | 33 | 44 | 48 | 54 | 56 |
| Clamping screw (ISO 4762) | | H | 8 x M6 | 8 x M8 | 8 x M8 | 8 x M10 | 8 x M10 | 8 x M12 |
| Tightening torque | (Nm) | | 16 | 28 | 34 | 63 | 86 | 143 |
| Moment of inertia** | ($10^{-3}kgm^2$) | $J_{ges.}$ | 3 | 5 | 11 | 15 | 26 | 48 |
| Weight** | (kg) | | 2.5 | 3.7 | 6.0 | 7.4 | 10.3 | 14.6 |
| Torsional stiffness | ($10^3Nm/rad$) | C_T | 60 | 80 | 130 | 150 | 210 | 290 |
| Axial \pm | (mm) | max. values | 1.0 | 1.0 | 1.5 | 1.5 | 2.0 | 2.0 |
| Lateral \pm | (mm) | | 0.2 | 0.2 | 0.3 | 0.3 | 0.4 | 0.4 |
| Angular \pm | (degree) | | 1.4 | 1.4 | 1.4 | 1.4 | 1.4 | 1.4 |
| Max. speed | (min^{-1}) | | 5,800 | 5,300 | 4,500 | 4,300 | 3,800 | 3,400 |
| Max. speed (balanced)*** | (min^{-1}) | | 11,200 | 10,200 | 8,700 | 8,300 | 7,400 | 6,600 |

* maximum transmittable torque depends on the bore diameter | ** at maximum bore diameter | *** higher speeds on request

| SIZE | $\phi 18$ | $\phi 20$ | $\phi 23$ | $\phi 25$ | $\phi 30$ | $\phi 35$ | $\phi 40$ | $\phi 45$ | $\phi 50$ | $\phi 55$ | $\phi 60$ | $\phi 70$ | $\phi 80$ | $\phi 90$ | $\phi 100$ | $\phi 120$ | $\phi 140$ | $\phi 150$ | $\phi 160$ | |
|-------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|------------|------------|------------|------------|------------|--|
| 300 | 180 | 200 | 230 | 250 | 300 | 350 | 400 | 450 | | | | | | | | | | | | |
| 500 | | | 300 | 330 | 400 | 460 | 525 | 590 | 650 | | | | | | | | | | | |
| 700 | | | | 400 | 480 | 560 | 640 | 720 | 800 | 880 | | | | | | | | | | |
| 1100 | | | | 590 | 710 | 830 | 950 | 1070 | 1190 | 1310 | 1430 | | | | | | | | | |
| 1600 | | | | | 970 | 1140 | 1300 | 1460 | 1630 | 1790 | 1950 | | | | | | | | | |
| 2600 | | | | | | 1580 | 1810 | 2040 | 2260 | 2490 | 2700 | 3150 | | | | | | | | |
| 4000 | | | | | | | 2300 | 2600 | 2900 | 3200 | 3500 | 4000 | 4600 | 5200 | | | | | | |
| 6000 | | | | | | | 3200 | 3700 | 4100 | 4500 | 4900 | 5700 | 6500 | 7400 | | | | | | |
| 8000 | | | | | | | | | 5000 | 5600 | 6100 | 7100 | 8100 | 9100 | 10000 | | | | | |
| 15000 | | | | | | | | | | | | 9000 | 10000 | 11500 | 13000 | 15500 | 18000 | 19500 | | |
| 25000 | | | | | | | | | | | | | | | 19000 | 23000 | 26500 | 28500 | 30500 | |

LPH

WITH FULLY SPLIT CLAMPING HUB

4,000 – 50,000 Nm



NEW

PROPERTIES

FEATURES


- ▶ lateral mounting between shafts
- ▶ easy installation and removal
- ▶ dual flex design

MATERIAL

- ▶ **disc packs:** highly elastic spring steel
- ▶ **hubs and spacer:** high strength steel

DESIGN

Two precision machined fully split clamping hubs and spacer plate mounted to the disc pack by means of high strength screws and bushings for alignment and frictional clamping of the assembly. From series 25,000 assembly screws/superbolts must be used.

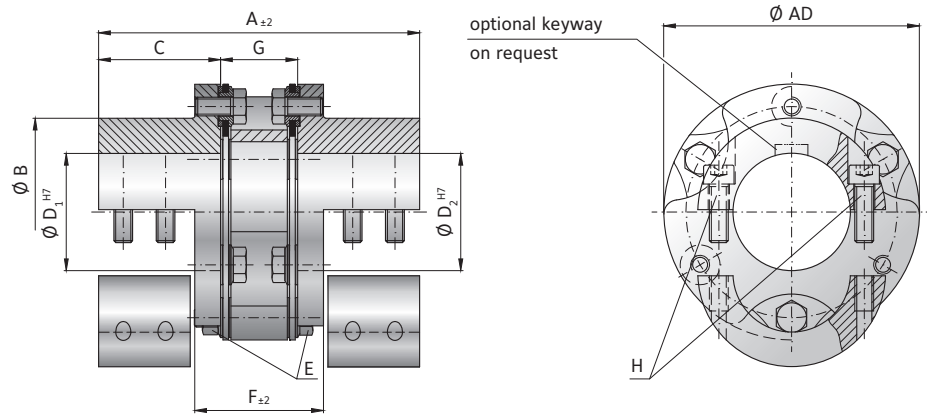

MODEL LPH D | SIZE 4000 - 25000

| SIZE | | | 4000 | 6000 | 8000 | 15000 | 25000 |
|--|--------------------|-------------|---------|---------|----------|----------|------------|
| Rated torque* | (Nm) | T_{KN} | 4,000 | 6,000 | 8,000 | 15,000 | 25,000 |
| Maximum torque* | (Nm) | T_{KNmax} | 8,000 | 12,000 | 16,000 | 30,000 | 50,000 |
| Overall length | (mm) | A | 274 | 302 | 349 | 420 | on request |
| Outside diameter | (mm) | ϕAD | 198 | 212 | 238 | 299 | 372 |
| Hub diameter | (mm) | ϕB | 137 | 149 | 168 | 220 | on request |
| Hub fit length | (mm) | C | 102 | 112 | 126 | 155 | 183 |
| Bore diameter available from ϕ to ϕ H7 | (mm) | $D_{1/2}$ | 38 - 90 | 39 - 95 | 50 - 102 | 70 - 150 | on request |
| Assembly screw (ISO 4017) Tensioning nut (DIN 4032) | | E | M16 | M16 | M20 | M24 | M36 |
| Tightening torque | (Nm) | | 360 | 400 | 755 | 1,000 | 72 |
| Length of center section | (mm) | F | 124 | 132 | 163 | 190 | on request |
| Distance between hubs | (mm) | G | 70 | 78 | 97 | 110 | on request |
| Clamping screw (ISO 4762) | | H | 8 x M14 | 8 x M16 | 8 x M20 | 8 x M20 | 8 x 24 |
| Tightening torque | (Nm) | | 215 | 342 | 530 | 680 | 1,200 |
| Moment of inertia** | ($10^{-3}kgm^2$) | $J_{ges.}$ | 104 | 146 | 280 | 913 | on request |
| Weight** | (kg) | | 22.7 | 28.5 | 43.4 | 80.9 | on request |
| Torsional stiffness | ($10^3Nm/rad$) | C_T | 470 | 570 | 800 | 1,400 | 2,960 |
| Axial \pm | (mm) | | 2.5 | 2.5 | 2.5 | 3.0 | 4,0 |
| Lateral \pm | (mm) | max. values | 0.5 | 0.5 | 0.6 | 0.7 | 0,8 |
| Angular \pm | (degree) | | 1.4 | 1.4 | 1.4 | 1.4 | 1,4 |
| Max, speed | (min^{-1}) | | 2,900 | 2,700 | 2,400 | 1,900 | 1,500 |
| Max, speed (balanced)*** | (min^{-1}) | | 5,600 | 5,200 | 4,700 | 3,700 | 3,000 |

* maximum transmittable torque depends on the bore diameter | ** at maximum bore diameter | *** higher speeds on request

| ORDERING EXAMPLE | LPH | 700 | D | 172 | 25.4 | 40 | XX |
|----------------------------|-----|-----|---|-----|------|----|--|
| Model | ● | | | | | | Special designation only (e.g. special bore diameter tolerances, balancing, etc.). Contact R+W for more information. |
| Size | | ● | | | | | |
| Type (D) | | | ● | | | | |
| Overall length (mm) | | | | ● | | | |
| Bore diameter ϕ D1 H7 | | | | | ● | | |
| Bore diameter ϕ D2 H7 | | | | | | ● | |

For custom features place an XX at the end of the part number and describe the special requirements (e.g. LPH / 700 / D / 172 / 25.4 / 40 / XX - balanced to 8,000 rpm)

DISC PACK COUPLINGS LP

LPZ

SPACER PLATE

350 - 5,200 Nm



NEW

PROPERTIES

FEATURES

- ▶ high torsional stiffness
- ▶ dual flex design
- ▶ for combination of hub types


MATERIAL

- ▶ **spacer plate:** high strength steel

DESIGN

For use when combining various hub designs with two disc packs and spacer plate.

From series 25,000 assembly screws/superbolts must be used.

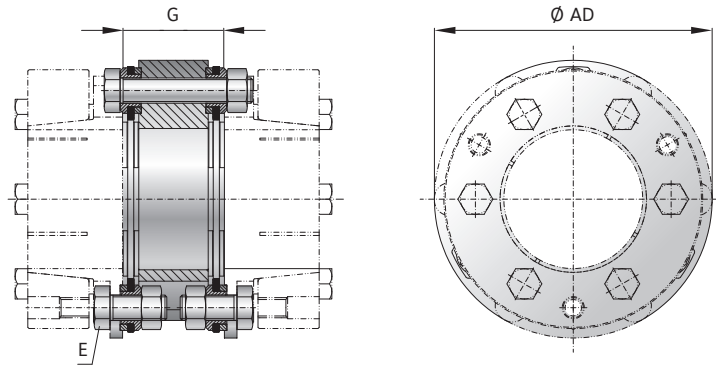

MODEL LPZ | SIZE 300 - 2600

| SIZE | | | 300 | 500 | 700 | 1100 | 1600 | 2600 |
|----------------------------------|--------------------------|------------------|--------|--------|-------|-------|-------|-------|
| Rated torque | (Nm) | T_{KN} | 350 | 500 | 700 | 1,100 | 1,600 | 2,600 |
| Maximum torque | (Nm) | T_{Kmax} | 700 | 1,000 | 1,400 | 2,200 | 3,200 | 5,200 |
| Distance between hubs | (mm) | G | 33 | 33 | 44 | 48 | 54 | 56 |
| Outside diameter | (mm) | $\varnothing AD$ | 99 | 109 | 128 | 133 | 150 | 168 |
| Assembly screw Tensioning nut | (ISO 4017) (DIN 4032) | E | M8 | M8 | M10 | M10 | M12 | M12 |
| Tightening torque | (Nm) | | 35 | 40 | 65 | 95 | 150 | 165 |
| Moment of inertia | ($10^{-3}kgm^2$) | $J_{ges.}$ | 0.7 | 1 | 2.6 | 3.2 | 5 | 9 |
| Weight | (kg) | | 0.55 | 0.66 | 1.25 | 1.4 | 1.8 | 2.3 |
| Torsional stiffness | ($10^3Nm/rad$) | C_T | 60 | 80 | 130 | 150 | 210 | 290 |
| Axial \pm | (mm) | max. values | 1 | 1 | 1.5 | 1.5 | 2 | 2 |
| Lateral \pm | (mm) | | 0.2 | 0.2 | 0.3 | 0.3 | 0.4 | 0.4 |
| Angular \pm | (degree) | | 1.4 | 1.4 | 1.4 | 1.4 | 1.4 | 1.4 |
| Max. speed | (min. ⁻¹) | | 5,800 | 5,300 | 4,500 | 4,300 | 3,800 | 3,400 |
| Max. speed (balanced)*** | (min. ⁻¹) | | 11,200 | 10,200 | 8,700 | 8,300 | 7,400 | 6,600 |

*** higher speeds on request

| ORDERING EXAMPLE | LPZ | 500 | XX |
|--|-----|-----|---|
| Model | ● | | Special designation only (e.g. balancing, materials, etc.). Contact R+W for more information. |
| Size | | ● | |
| For custom features place an XX at the end of the part number and describe the special requirements (e.g. LPZ / 500 / XX - balanced to 10,000 rpm) | | | |

LPZ

SPACER PLATE 4,000 - 50,000 Nm



NEW

PROPERTIES

FEATURES

- ▶ high torsional stiffness
- ▶ dual flex design
- ▶ for combination of hub types


MATERIAL

- ▶ **spacer plate:** high strength steel

DESIGN

For use when combining various hub designs with two disc packs and spacer plate.

From series 25,000 assembly screws/superbolts must be used.

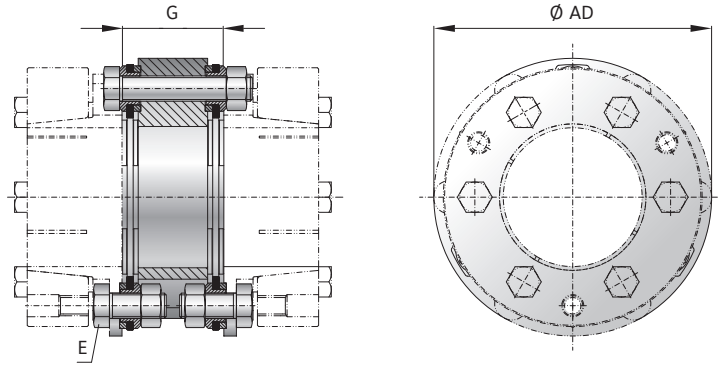

MODEL LPZ | SIZE 4000 - 25000

| SIZE | | | 4000 | 6000 | 8000 | 15000 | 25000 |
|----------------------------------|--------------------------|----------------|-------|--------|--------|--------|------------|
| Rated torque | (Nm) | T_{KN} | 4,000 | 6,000 | 8,000 | 15,000 | 25,000 |
| Maximum torque | (Nm) | T_{Kmax} | 8,000 | 12,000 | 16,000 | 30,000 | 50,000 |
| Distance between hubs | (mm) | G | 70 | 78 | 97 | 110 | on request |
| Outside diameter | (mm) | ϕAD | 198 | 212 | 238 | 299 | 372 |
| Assembly screw Tensioning nut | (ISO 4017) (DIN 4032) | E | M16 | M16 | M20 | M24 | M36 |
| Tightening torque | (Nm) | | 360 | 400 | 755 | 1,200 | 72 |
| Moment of inertia | ($10^{-3}kgm^2$) | $J_{ges.}$ | 18 | 27 | 54 | 164 | on request |
| Weight | (kg) | | 3.7 | 4.8 | 7.5 | 14 | on request |
| Torsional stiffness | ($10^3Nm/rad$) | C_T | 470 | 570 | 800 | 1,400 | 2,960 |
| Axial \pm | (mm) | max. values | 2.5 | 2.5 | 2.5 | 3 | 4 |
| Lateral \pm | (mm) | | 0.5 | 0.5 | 0.6 | 0.7 | 0.8 |
| Angular \pm | (degree) | | 1.4 | 1.4 | 1.4 | 1.4 | 1.4 |
| Max. speed | (min. ⁻¹) | | 2,900 | 2,700 | 2,400 | 1,900 | 1,500 |
| Max. speed (balanced)*** | (min. ⁻¹) | | 5,600 | 5,200 | 4,700 | 3,700 | 3,000 |

*** higher speeds on request

| ORDERING EXAMPLE | LPZ | 6000 | XX |
|--|-----|------|---|
| Model | ● | | Special designation only (e.g. balancing, materials, etc.). Contact R+W for more information. |
| Size | | ● | |
| For custom features place an XX at the end of the part number and describe the special requirements (e.g. LPZ / 6000 / XX - balanced to 5,000 rpm) | | | |



WITH KEYWAY MOUNTING

500 - 24,000 Nm

API 610 - METRIC
(API 671 OPTIONAL)

PROPERTIES



FEATURES


- ▶ lateral installation and removal without disturbing shaft hubs
- ▶ fail safe in case of disc pack rupture
- ▶ standard balance quality of AGMA Class 9

MATERIAL

- ▶ **disc packs:** highly elastic spring steel
- ▶ **hubs and spacer:** high strength steel

DESIGN

Two precision machined coupling hubs mounted to the disc pack spacer with connection of the disc packs by means of high strength screws and bushings for alignment and frictional clamping of the assembly. Axial retention of the hubs on the shaft with DIN 916 set screws.

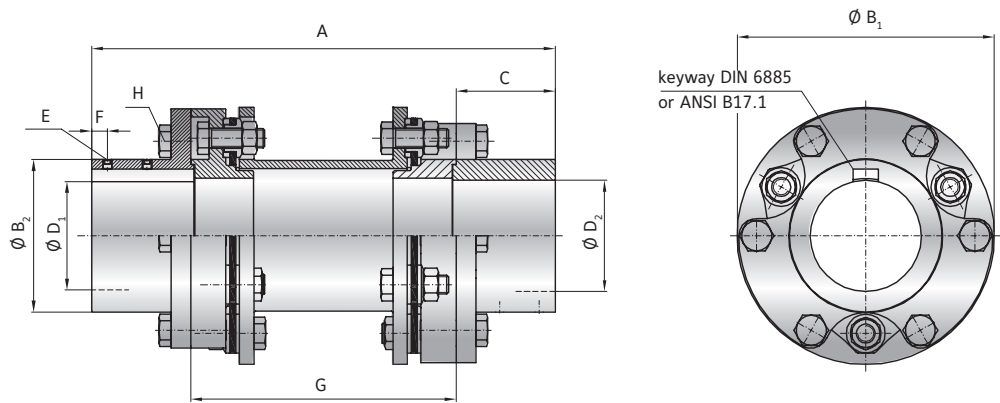

MODEL LPA | SIZE 500 - 12000

| SIZE | | 500 | 800 | 2500 | 5000 | 8000 | 12000 |
|--|-------------------|-----------|-------------|-------------|-----------|----------|----------|
| Power rating (kW/100 rpm) | P _{KN} | 5 | 8 | 26.2 | 52 | 84 | 126 |
| Rated torque (Nm) | T _{KN} | 500 | 800 | 2,500 | 5,000 | 8,000 | 12,000 |
| Maximum torque (Nm) | T _{Kmax} | 1,000 | 1,600 | 5,000 | 10,000 | 16,000 | 24,000 |
| Overall length (mm) | A | 190 230 | 250 290 | 332 402 | 360 430 | 450 | 500 |
| Outside diameter (mm) | B ₁ | 116 | 142 | 190 | 231 | 298 | 324 |
| Hub diameter (mm) | B ₂ | 71 | 84 | 102 | 130 | 160 | 192 |
| Hub fit length (mm) | C | 45 | 55 | 75 | 90 | 100 | 125 |
| Bore diameter available from Ø to Ø H7 (mm) | D _{1/2} | 23 - 50 | 25 - 60 | 31 - 75 | 39 - 95 | 50 - 115 | 70 - 140 |
| Set screw (DIN 916) | E | 2 × M6 | 2 × M6 | 2 × M8 | 2 × M10 | 2 × M10 | 2 × M12 |
| Screw location (mm) | F | 7 | 10 | 14 | 15 | 15 | 20 |
| Spacer length (mm) | G | 100 140 | 140 180 | 180 250 | 180 250 | 250 | 250 |
| Assembly screw (ISO 4017) Tensioning nut (DIN 4032) | H | M8 | M10 | M16 | M20 | M24 | M24 |
| Tightening torque (Nm) | | 41 | 83 | 355 | 690 | 1,200 | 1,200 |
| Moment of inertia** (10 ⁻³ kgm ²) | | 8 8.4 | 21.8 22.3 | 85.8 88.4 | 248 256 | 901 | 1,350 |
| Material | | steel | steel | steel | steel | steel | steel |
| Weight** (kg) | | 5 5.4 | 9.2 9.6 | 20.8 22 | 39 41 | 83 | 105 |
| Axial ± (mm) | | 0.75 | 1 | 1.3 | 1.5 | 1.7 | 2 |
| Lateral ± (mm) | | 0.7 1.1 | 1 1.5 | 1.3 2 | 1.1 1.9 | 1.5 | 1.5 |
| Angular ± (degree) | | 1° | 1° | 1° | 1° | 1° | 1° |
| Max. speed (1/min.) | | 7,600 | 6,400 | 5,300 | 3,900 | 3,100 | 2,500 |
| Max. speed (balanced) (1/min.) | | 18,800 | 15,100 | 12,800 | 9,800 | 8,100 | 6,200 |

** at maximum bore diameter

| ORDERING EXAMPLE | LPA | 800 | 250 | 41.28 | 38 | XX |
|---|-----|-----|-----|-------|----|----|
| Model | ● | | | | | |
| Size | | ● | | | | |
| Overall length (mm) | | | ● | | | |
| Bore diameter Ø D1 H7 | | | | ● | | |
| Bore diameter Ø D2 H7 | | | | | ● | |
| Special designation only (e.g. special bore diameter tolerances, balancing, etc.). Contact R+W for more information. | | | | | | |
| For custom features place an XX at the end of the part number and describe the special requirements (e.g. LPA / 800 / 250 / 41.28 / 38 / XX - balanced to 15,000 rpm) | | | | | | |



PROPERTIES

FEATURES


- ▶ lateral installation and removal without disturbing shaft hubs
- ▶ flail safe in case of disc pack rupture
- ▶ standard balance quality of AGMA Class 9

MATERIAL

- ▶ **disc packs:** highly elastic spring steel
- ▶ **hubs and spacer:** high strength steel

DESIGN

Two precision machined coupling hubs mounted to the disc pack spacer with connection of the disc packs by means of high strength screws and bushings for alignment and frictional clamping of the assembly. Axial retention of the hubs on the shaft with DIN 916 set screws.

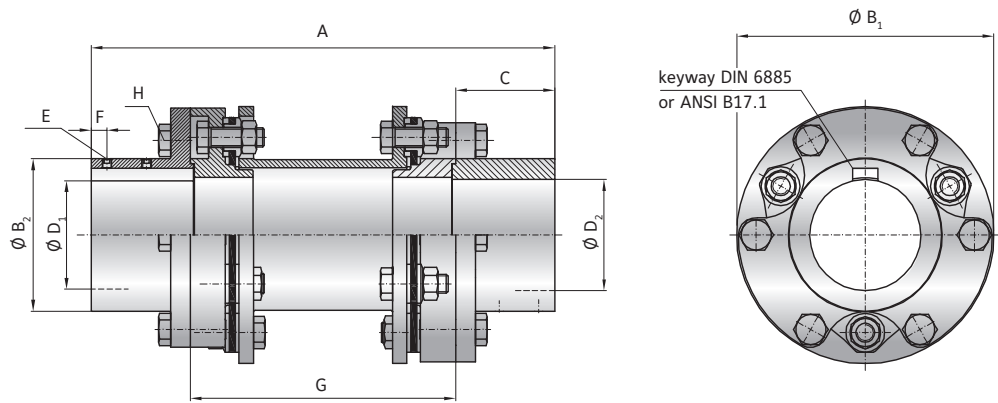

MODEL LPAI | SIZE 500 - 12000

| SIZE | | 500 | | 800 | | 2500 | | 5000 | | 8000 | | 12000 | |
|---|------------|-------------|--------|-------------|--------|--------------|--------|-------------|--------|-------------|--------|-------------|--|
| Power rating (kW/100 rpm) | P_{KN} | 5 | | 8 | | 26.2 | | 52 | | 84 | | 126 | |
| Rated torque (Nm) | T_{KN} | 500 | | 800 | | 2,500 | | 5,000 | | 8,000 | | 12,000 | |
| Maximum torque (Nm) | T_{Kmax} | 1,000 | | 1,600 | | 5,000 | | 10,000 | | 16,000 | | 24,000 | |
| Overall length (mm) | A | 217 | 268 | 237 | 288 | 330 | 381 | 358 | 409 | 429 | 479 | | |
| Outside diameter (mm) | B_1 | 116 | | 142 | | 190 | | 231 | | 298 | | 324 | |
| Hub diameter (mm) | B_2 | 71 | | 84 | | 102 | | 130 | | 160 | | 192 | |
| Hub fit length (mm) | C | 45 | | 55 | | 75 | | 90 | | 100 | | 125 | |
| Bore diameter available from \emptyset to \emptyset H7 (mm) | $D_{1/2}$ | 23 - 50 | | 25 - 60 | | 31 - 75 | | 39 - 95 | | 50 - 115 | | 70 - 140 | |
| Set screw (DIN 916) | E | 2 x 1/4"-20 | | 2 x 1/4"-20 | | 2 x 5/16"-18 | | 2 x 3/8"-16 | | 2 x 1/2"-13 | | 2 x 1/2"-13 | |
| Screw location (mm) | F | 7 | | 10 | | 14 | | 15 | | 15 | | 20 | |
| Spacer length (mm) | G | 127/5" | 178/7" | 127/5" | 178/7" | 178/7" | 229/9" | 178/7" | 229/9" | 229/9" | 229/9" | 229/9" | |
| Assembly screw (ISO 4017) Tensioning nut (DIN 4032) | H | 5/16"-18 | | 3/8"-16 | | 5/8"-11 | | 3/4"-10 | | 1"-8 | | 1"-8 | |
| Tightening torque (Nm) | | 38 | | 68 | | 320 | | 595 | | 1,100 | | 1,100 | |
| Moment of inertia** (10 ⁻³ kgm ²) | | 8.3 | 8.8 | 21 | 22.3 | 85 | 87 | 248 | 254 | 890 | 1,344 | | |
| Material | | steel | | steel | | steel | | steel | | steel | | steel | |
| Weight** (kg) | | 5.3 | 5.7 | 9.1 | 9.6 | 20.8 | 21.6 | 38.9 | 40 | 82.3 | 104 | | |
| Axial \pm (mm) | | 0.75 | | 1 | | 1.3 | | 1.5 | | 1.7 | | 2 | |
| Lateral \pm (mm) | | 1 | 1.5 | 0.9 | 1.4 | 1.3 | 1.8 | 1.1 | 1.6 | 1.3 | 1.3 | 1.3 | |
| Angular \pm (degree) | | 1° | | 1° | | 1° | | 1° | | 1° | | 1° | |
| Max. speed (1/min.) | | 7,600 | | 6,400 | | 5,300 | | 3,900 | | 3,100 | | 2,500 | |
| Max. speed (balanced)*** (1/min.) | | 18,800 | | 15,100 | | 12,800 | | 9,800 | | 8,100 | | 6,200 | |

** at maximum bore diameter | *** higher speeds on request

| ORDERING EXAMPLE | LPAI | 800 | 237 | 25.4 | 50.8 | XX |
|---|------|-----|-----|------|------|----|
| Model | ● | | | | | |
| Size | | ● | | | | |
| Overall length (mm) | | | ● | | | |
| Bore diameter \emptyset D1 H7 | | | | ● | | |
| Bore diameter \emptyset D2 H7 | | | | | ● | |
| <p>Special designation only (e.g. special bore diameter tolerances, balancing, etc.). Contact R+W for more information.</p> | | | | | | |
| <p>For custom features place an XX at the end of the part number and describe the special requirements (e.g. LPA / 800 / 237 / 25.4 / 50.8 / XX - balanced to 15,000 rpm)</p> | | | | | | |

DISC PACK COUPLINGS
LP

LPA

LPAI

API 610 / API 671 MORE INFORMATION

DEFINITION OF TERMS / GENERAL INFORMATION

- ▶ API is the American Petroleum Institute
- ▶ API 610 and 671 seek to harmonize the technical requirements of pump and compressor systems in the American oil and gas industry, and are used worldwide
- ▶ Couplings built in accordance with API 671 must meet stricter requirements than API 610

REQUIREMENTS FOR COUPLINGS

API 610

- ▶ Design according to service factor of at least 1.0 (unless otherwise specified)
- ▶ Anti-flail safety required to prevent the spacer from being thrown in the event of disc pack rupture
- ▶ Spacer length of at least 5"
- ▶ Balance requirements vary by speed (contact R+W)

API 671

- ▶ Design according to service factor of at least 1.5 (unless otherwise specified)
- ▶ Anti-flail safety required to prevent the spacer from being thrown in the event of disc pack rupture
- ▶ Match-weighted screws with documentation for future replacement
- ▶ Balance requirements vary by speed (contact R+W)

INFORMATION REQUIRED FOR DESIGN

- ▶ Drive power or nominal / peak application torque
- ▶ Rotational speed
- ▶ Bore diameters
- ▶ Keyway standards or sizes
- ▶ Distance between shaft ends (DBSE)
- ▶ Ambient temperature
- ▶ Balance grade (if different from AGMA Class 9)

Special designs are available on request!

SAMPLE DESIGN LPA 2500 API 610

| Customer | Order number | Quote number | Drawing number |
|----------|--------------|--------------|----------------|
| | | | |

| Characteristic | Unit | Value |
|-----------------------------|-------|-------|
| Drive power | KW | 300 |
| Speed | 1/min | 1900 |
| Torque | Nm | 1508 |
| Service factor | | 1.66 |
| Rated torque | Nm | 2500 |
| Distance between shaft ends | mm | 260 |
| Ambient temperature | °C | 40 |

| Dynamic balancing | |
|-------------------|-------|
| Balance quality | G 6.3 |
| Procedure | |
| Component balance | |


Balance grade AGMA Class 9

Coupling qualifies for operating conditions

Coupling Type / Size / Overall length (mm)

LPA / 2500 / 402

| Characteristic | Unit | Value |
|---------------------------|-----------------------------------|-------|
| Rated torque | Nm | 2500 |
| Maximum torque | Nm | 5000 |
| Moment of inertia | 10 ⁻³ kgm ² | 88.4 |
| Approximate weight | kg | 22 |
| Max. axial misalignment | mm | 1.3 |
| Max. angular misalignment | degree | 1 |
| Max. lateral misalignment | mm | 2 |
| Max. allowable speed | 1/min. | 12800 |
| Overall length A | mm | 402 |
| Outside diameter AD | mm | 190 |
| Hub diameter B | mm | 102 |
| Hub fit length C | mm | 75 |
| Spacer length G | mm | 250 |

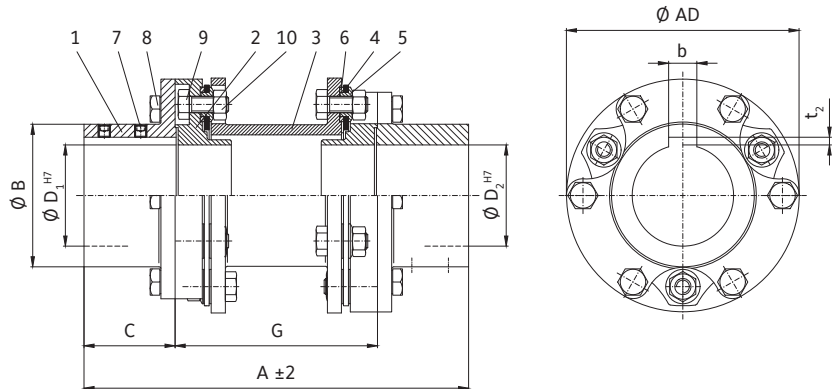

| Driving side | | | | | |
|----------------|-------------|------|----------------|-----|------|
| Hub | mm | Tol. | keyw. | mm | Tol. |
| D ₁ | 65 | H7 | b | 18 | JS9 |
| Style | Cylindrical | | t ₂ | 4.4 | |

| Driven side | | | | | |
|----------------|-------------|------|----------------|-----|------|
| Hub | mm | Tol. | keyw. | mm | Tol. |
| D ₂ | 65 | H7 | b | 18 | JS9 |
| Style | Cylindrical | | t ₂ | 4.4 | |

| Keyway |
|------------|
| DIN 6885-1 |

| Item | Quantity | Description | Standard | Part designation | Material |
|------|----------|----------------|----------|------------------|----------------------|
| 1 | 2 | Keyway hub | - | 820124 | 16MnCr5 (1.7131) |
| 2 | 2 | Guard ring | - | 820254 | 16MnCr5 (1.7131) |
| 3 | 1 | Spacer | - | 820321 | 16MnCr5 (1.7131) |
| 4 | 12 | Flexible disc | - | 820008 | X12CrNi17 7 (1.4310) |
| 5 | 12 | Sleeve | - | 820508 | 42CrMo4+QT |
| 6 | 12 | Bushing | - | 820408 | 42CrMo4+QT |
| 7 | 4 | Set screw | ISO 4029 | M8 | - |
| 8 | 12 | Assembly screw | ISO 4017 | M16x35 - 12.9 | - |
| 9 | 12 | Assembly screw | ISO 4017 | M16x40 - 12.9 | - |
| 10 | 12 | Tensioning nut | ISO 4032 | M16 -12 | - |

Surface protection: oiled



INTELLIGENT COUPLING WITH INTEGRAL SENSOR TECHNOLOGY 350 – 50,000 Nm



NEW

PROPERTIES

FEATURES

- ▶ recording of various performance characteristics
- ▶ measurement accuracy within <1% (torque)
- ▶ amplifier on board
- ▶ evaluation directly on integral chip
- ▶ wireless transmission directly to mobile device or PC (with gateway)
- ▶ data export in CSV

MEASUREMENTS TAKEN

- ▶ speed ▶ vibration
- ▶ torque ▶ optional axial force

DESIGN

- ▶ spacer with integral sensor technology
- ▶ coupling properties remain unchanged (see previous pages)
- ▶ custom configurations on request

SPECIFICATIONS

- ▶ Bluetooth Low Energy
- ▶ magnetic charging port
- ▶ sampling rate of 500 Hz
- ▶ transmission rate of up to 500 Hz
- ▶ speed up to 3000 rpm

POWER SUPPLY

Battery power

- ▶ no wiring necessary
- ▶ easy installation
- ▶ for use with mobile app

Inductive power

- ▶ for fixed installations
- ▶ continuous and uninterrupted measurement (24/7 operation)

COUPLING MODELS AVAILABLE WITH SENSOR UNIT

LP2



- ▶ with keyway mounting
- ▶ positive drive connection
- ▶ easy installation

LP3



- ▶ with conical clamping ring hubs
- ▶ frictional shaft connection
- ▶ zero backlash torque transmission in reversing applications

LP5



- ▶ with clamping hubs
- ▶ frictional shaft connection
- ▶ zero backlash torque transmission in reversing applications
- ▶ easy installation

LPH



- ▶ with fully split clamping hubs
- ▶ frictional shaft connection
- ▶ zero backlash torque transmission in reversing applications
- ▶ lateral mounting

SPECIAL OPTIONS

- ▶ e.g. with flange connections
- ▶ or fully customized




INTELLIGENT COUPLING WITH INTEGRAL SENSOR TECHNOLOGY 350 – 50,000 Nm

DATA COLLECTION



GATEWAY

- ▶ connection to PC via USB port
- ▶ PLC or cloud solutions via 8 analog outputs (-10 to 10 V)
- ▶ 4 digital outputs for programmable status updates
- ▶ SMA connector for external antennas

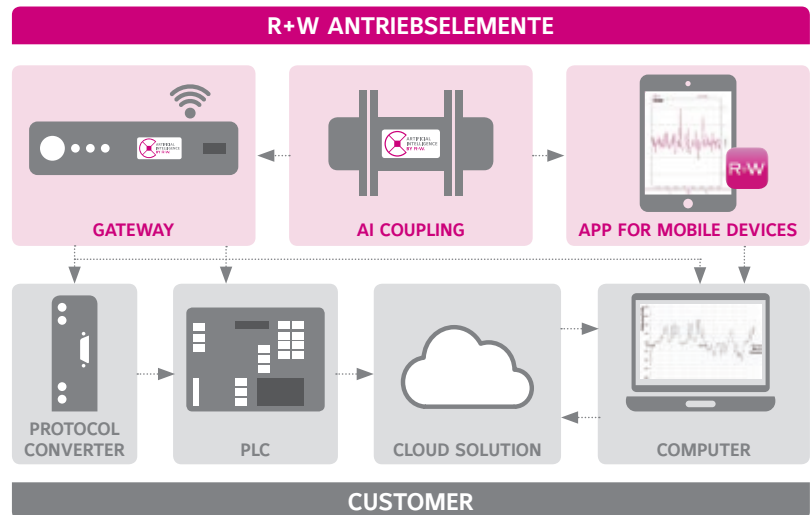

DISC PACK COUPLINGS
LP

R+W APP

- ▶ display of all measurement variables
- ▶ min / max and average values
- ▶ tare function
- ▶ various chart types
- ▶ detailed measurement curves
- ▶ intuitive gesture control
- ▶ retains data for further analysis
- ▶ export in CSV format

Requirements:

- ▶ Android tablet or smartphone
- ▶ version 6.0 or higher
- ▶ minimum 30 MB free space
- ▶ Bluetooth 4.0 or higher





OPTIONS / SPECIAL SOLUTIONS / HIGHER TORQUES

TORSIONALLY STIFF DISC PACK COUPLINGS - FURTHER INFORMATION



WITH CLAMPING HUB

- ▶ easy installation
- ▶ zero backlash torque transmission
- ▶ customer specified length available
- ▶ dual flex design
- ▶ keyway optional on request



WITH FULLY SPLIT CLAMPING HUB

- ▶ easy installation and removal
- ▶ zero backlash torque transmission
- ▶ customer specified length available
- ▶ dual flex design
- ▶ keyway optional on request



WITH CONICAL CLAMPING RING HUB AND FLANGE MOUNTING FOR CONNECTION TO TORQUE TRANSDUCERS


- ▶ high torsional stiffness
- ▶ high clamping pressure
- ▶ zero backlash torque transmission



WITH INTEGRAL COOLANT DELIVERY PIPE


- ▶ spacer: carbon fiber, aluminum or steel
- ▶ for high speeds
- ▶ customer specified length available
- ▶ dual flex design

TORSIONALLY STIFF DISC PACK COUPLINGS - FURTHER INFORMATION




WITH BRAKE DISC

- ▶ brake disc according to customer requirements
- ▶ single or dual flex
- ▶ with keyway mounting, conical clamping rings, clamping hubs, fully split clamping hubs or flange mounting



WITH VERTICAL SUPPORT

- ▶ for vertical installations
- ▶ with keyway mounting, conical clamping rings, clamping hubs, fully split clamping hubs or flange mounting



WITH ELECTRICAL ISOLATING

- ▶ single or dual flex
- ▶ with keyway mounting, conical clamping rings, clamping hubs, fully split clamping hubs or flange mounting

HIGHER TORQUES ON REQUEST





CROWNED GEAR COUPLINGS

1,900 – 2,080,000 Nm

GENERAL INFORMATION ABOUT R+W CROWNED GEAR COUPLINGS:

FIT CLEARANCE

Overall shaft / hub clearance of 0.01 - 0.05 mm

TEMPERATURE RANGE



-30 to +100° C; higher temperatures on request

CROWNED GEAR COUPLINGS

1,900 – 2,080,000 Nm

MODEL

FEATURES

| | | | |
|-------------------|---|---|-----------------------|
| <p>BZ1</p> |  | <p>with keyway mounting or cylindrical bore for interference fit from 1,900 - 2,080,000 Nm</p> <ul style="list-style-type: none"> ▶ high power density ▶ very low backlash ▶ economically priced ▶ low maintenance due to special crowned tooth design | <p>Page 96 - 97</p> |
| <p>BZA</p> |  | <p>with keyway mounting or cylindrical bore for interference fit from 1,900 - 2,080,000 Nm</p> <ul style="list-style-type: none"> ▶ for spanning larger shaft distances ▶ high power density ▶ very low backlash ▶ low maintenance due to special crowned tooth design | <p>Page 98 - 99</p> |
| <p>BZ</p> | <p>Options / Special Solutions</p> | | <p>Page 100 - 101</p> |

GENERAL INFORMATION


CROWNED GEAR COUPLINGS

FUNCTION OF THE GEAR COUPLING


The precise integration of the coupling hub and intermediate flange allow for low backlash and highly rigid torque transmission, while compensating for lateral, axial and

angular shaft misalignment. The crowned geometry of the gearing allows for a long life, even without the presence of misalignment.

Axial misalignment

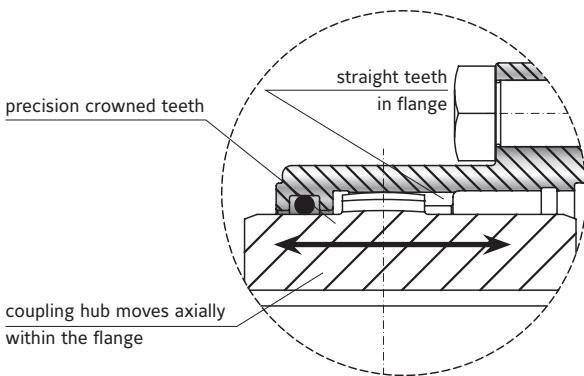

Angular and lateral misalignment

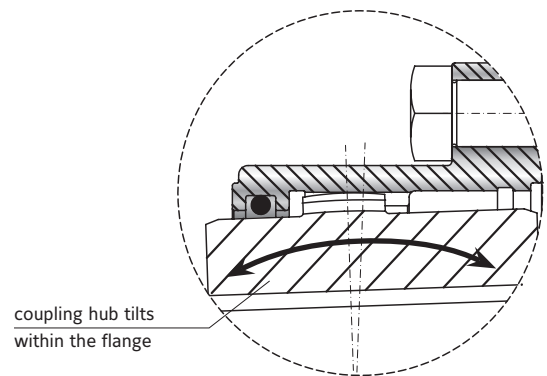


APPROVED LUBRICANTS

► **Note:** Proper lubrication is very important to the service life of the coupling. An optional additional seal may be included in order to extend lubrication intervals.

High performance grease is recommended.

| Normal speed and loads | | High speed and loads | |
|------------------------|-------------------------------|----------------------|----------------------|
| Castrol | Impervia MDX | Caltex | Coupling Grease |
| Esso | Fibrax 370 | Klüber | Klüberplex GE 11-680 |
| Klüber | Klüberplex GE 11-680 | Mobil | Mobilgrease XTC |
| Mobil | Mobilux EPO | Shell | Albida GC1 |
| Shell | Alvania grease EP R-O or ER 1 | Texaco | Coupling Grease |
| Total | Specis EPG | | |

MAINTENANCE AND LUBRICATION

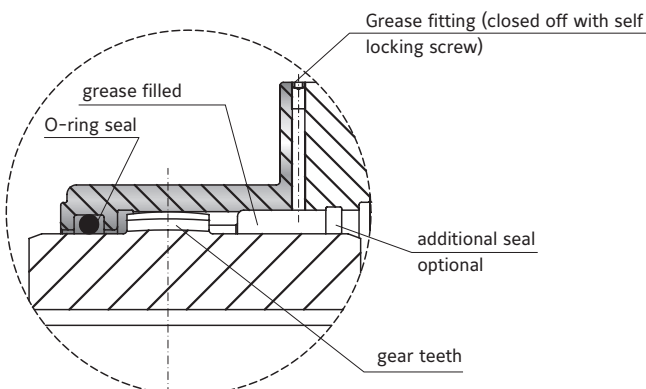

BZ1

WITH KEYWAY MOUNTING

1,900 - 480,000 Nm



PROPERTIES

MATERIAL

Coupling from high strength steel


DESIGN

Hubs with keyway mounting or high precision cylindrical bore for

interference fitting.

Optional DIN 916 set screw for locking down onto shaft key.

Size 450 and up with axial threads in hubs.

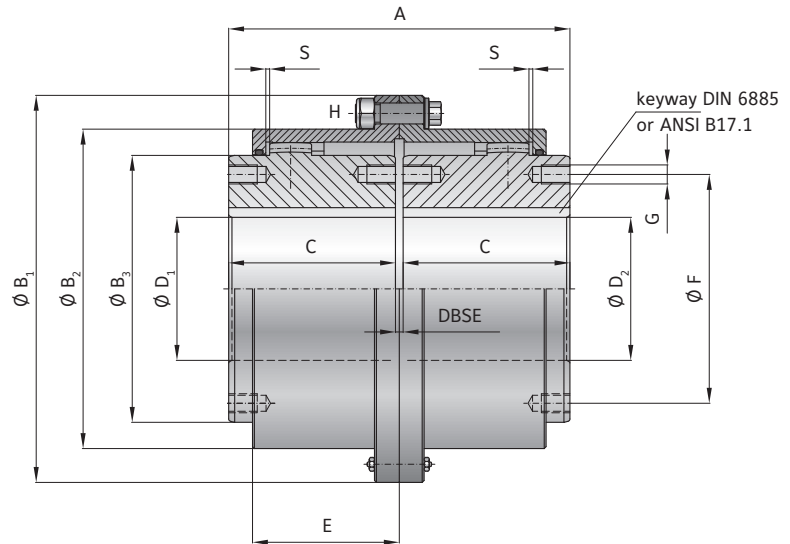

MODEL BZ1 | SIZE 10 - 2000

| SIZE | | | 10 | 25 | 50 | 100 | 150 | 200 | 300 | 450 | 600 | 800 | 1500 | 2000 |
|---|----------------------------|------------|---------|---------|---------|---------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| Rated torque | (kNm) | T_{KN} | 1.9 | 2.9 | 5.7 | 9 | 14.5 | 22 | 34 | 45 | 70 | 85 | 150 | 200 |
| Max. torque | (kNm) | T_{Kmax} | 4.2 | 6.8 | 14 | 21.5 | 35 | 54 | 83 | 110 | 170 | 205 | 360 | 480 |
| Installed length | (mm) | A | 89 | 103 | 127 | 157 | 185 | 216 | 246 | 278 | 308 | 358 | 388 | 450 |
| Outside diameter | (mm) | B_1 | 111 | 142 | 168 | 200 | 225 | 265 | 300 | 330 | 370 | 406 | 438 | 505 |
| Flange diameter | (mm) | B_2 | 82.5 | 104.6 | 130.5 | 158.4 | 183.4 | 211.5 | 245.5 | 275.5 | 307 | 335 | 367 | 423 |
| Hub diameter | (mm) | B_3 | 68 | 86 | 105 | 132 | 151 | 179 | 209.5 | 234 | 255 | 280 | 306 | 356 |
| Hub fit length | (mm) | C | 43 | 50 | 62 | 76 | 90 | 105 | 120 | 135 | 150 | 175 | 190 | 220 |
| Max bore diameter H7 with 1 / 2 keyways* | (mm) | $D_{1/2}$ | 48 / 52 | 62 / 62 | 72 / 78 | 90 / 98 | 105 / 112 | 122 / 132 | 144 / 156 | 160 / 174 | 175 / 190 | 192 / 210 | 210 / 233 | 245 / 280 |
| Bore diameters from ϕ to ϕ H7 with interference fit | (mm) | $D_{1/2}$ | 12-52 | 18-62 | 30-78 | 32-98 | 42-112 | 45-132 | 50-156 | 60-174 | 70-190 | 90-210 | 110-233 | 120-280 |
| Distance between shaft ends | (mm) | DBSE | 3 | 3 | 3 | 5 | 5 | 6 | 8 | 8 | 8 | 8 | 8 | 10 |
| Hub length | (mm) | E | 39 | 46 | 59 | 78.5 | 92.5 | 108 | 123 | 139 | 154 | 179 | 194 | 225 |
| Hole circle diameter | (mm) | ϕF | 61 | 73 | 91 | 115 | 132 | 154 | 180 | 204 | 220 | 240 | 268 | 316 |
| Thread size | | G | M5 | M6 | M8 | M10 | M12 | M12 | M16 | M16 | M20 | M20 | M24 | M24 |
| Bolt | | H | M8 | M10 | M10 | M12 | M12 | M16 | M16 | M16 | M18 | M22 | M22 | M24 |
| Tightening torque | (Nm) | | 18 | 36 | 36 | 65 | 65 | 150 | 150 | 150 | 220 | 400 | 400 | 520 |
| Moment of inertia at Dmax | (10^{-3}kgm^2) | | 3.9 | 11.6 | 28.7 | 70.6 | 135.3 | 326.7 | 605.6 | 1021 | 1745.5 | 2963 | 4147.2 | 7982 |
| Weight at Dmax | (kg) | | 2.5 | 4.8 | 8.4 | 14.2 | 21.4 | 36.0 | 51.5 | 71 | 99 | 144 | 165 | 234.5 |
| Max speed | (1/min) | | 6000 | 4550 | 4000 | 3900 | 3700 | 3550 | 3000 | 2750 | 2420 | 2270 | 1950 | 1730 |
| Axial misalignment | (mm) | S | 1.5 | 1.5 | 1.5 | 2.5 | 2.5 | 3 | 4 | 4 | 4 | 4 | 4 | 5 |
| Angular misalignment | (Degree) | | 2x0.35 | 2x0.35 | 2x0.35 | 2x0.35 | 2x0.35 | 2x0.35 | 2x0.35 | 2x0.35 | 2x0.35 | 2x0.35 | 2x0.35 | 2x0.35 |

* Larger maximum bore possible with 2 keyways, due to increased stress distribution versus wall thickness.

| ORDERING EXAMPLE | BZ1 | 50 | 60 | 50 | XX |
|--|-----|----|----|----|----|
| Model | ● | | | | |
| Size | | ● | | | |
| Bore ϕ D1 H7 | | | ● | | |
| Bore ϕ D2 H7 | | | | ● | |
| Special designation only (e.g. special bore tolerance). | | | | | |
| For custom features place an XX at the end of the part number and describe the special requirements (e.g. BZ1 / 50 / 60 / 50 / XX) | | | | | |

BZ1

WITH KEYWAY MOUNTING

290,000 – 2,080,000 Nm



NEW

PROPERTIES


MATERIAL

Coupling from high strength steel

DESIGN

Hubs with keyway mounting or high precision cylindrical bore for interference fitting.

Optional DIN 916 set screw for locking down onto shaft key.

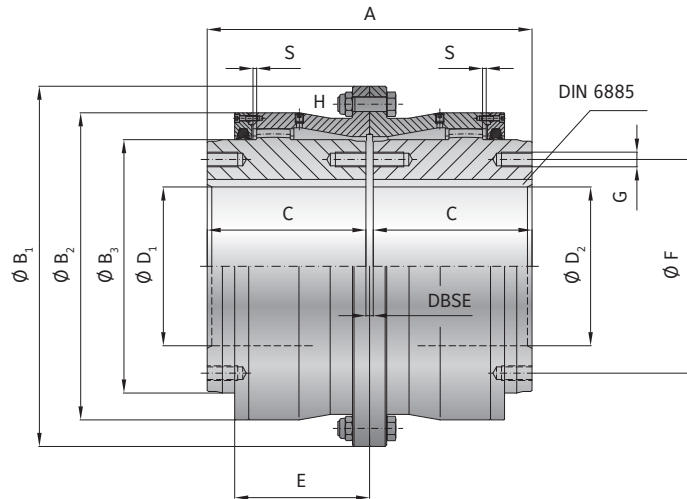

MODEL BZ1 | SIZE 3000 - 10000

| SIZE | | | 3000 | 4000 | 5000 | 7000 | 8000 | 10000 |
|---|----------------------------|------------|---------|---------|---------|---------|---------|---------|
| Rated torque | (kNm) | T_{KN} | 290 | 402 | 518 | 693 | 882 | 1040 |
| Max. torque | (kNm) | T_{Kmax} | 580 | 804 | 1036 | 1386 | 1764 | 2080 |
| Installed length | (mm) | A | 532 | 592 | 652 | 712 | 772 | 820 |
| Outside diameter | (mm) | B_1 | 590 | 639 | 702 | 769 | 834 | 894 |
| Flange diameter | (mm) | B_2 | 503 | 553 | 597 | 657 | 722 | 763 |
| Hub diameter | (mm) | B_3 | 415 | 464 | 490 | 545 | 620 | 660 |
| Hub fit length | (mm) | C | 260 | 290 | 320 | 350 | 380 | 400 |
| Bore diameter H7 | (mm) | $D_{1/2}$ | 160-325 | 180-370 | 200-400 | 200-430 | 230-475 | 250-510 |
| Bore diameters from ϕ to ϕ H7 with interference fit | (mm) | $D_{1/2}$ | 160-325 | 180-370 | 200-400 | 200-430 | 230-475 | 250-510 |
| Distance between shaft ends | (mm) | DBSE | 12 | 12 | 12 | 12 | 12 | 20 |
| Hub length | (mm) | E | 221 | 245.5 | 262 | 280 | 292 | 315 |
| Hole circle diameter | (mm) | ϕF | 350 | 400 | 430 | 490 | 560 | 580 |
| Thread size | | G | M24 | M24 | M30 | M30 | M24 | M36 |
| Bolt | | H | M24 | M24 | M30 | M30 | M30 | M36 |
| Tightening torque | (Nm) | | 670 | 670 | 1250 | 1250 | 1250 | 2170 |
| Moment of inertia at Dmax | (10^{-3}kgm^2) | | 18781 | 28323 | 44986 | 71329 | 113616 | 150801 |
| Weight at Dmax | (kg) | | 406 | 503 | 670 | 904 | 1201 | 1403 |
| Max speed | (1/min) | | 1100 | 990 | 890 | 785 | 700 | 645 |
| Axial misalignment | (mm) | S | 6 | 6 | 6 | 6 | 6 | 10 |
| Angular misalignment | (Degree) | | 2x0.35 | 2x0.35 | 2x0.35 | 2x0.35 | 2x0.35 | 2x0.35 |

CROWNED GEAR COUPLINGS BZ

| ORDERING EXAMPLE | BZ1 | 5000 | 210 | 390 | XX |
|--|-----|------|-----|-----|----|
| Model | ● | | | | |
| Size | | ● | | | |
| Bore ϕ D1 H7 | | | ● | | |
| Bore ϕ D2 H7 | | | | ● | |
| Special designation only (e.g. special bore tolerance). | | | | | |
| For custom features place an XX at the end of the part number and describe the special requirements (e.g. BZ1 / 5000 / 210 / 390 / XX) | | | | | |

BZA

WITH KEYWAY MOUNTING

1,900 – 480,000 Nm

**NEW**

PROPERTIES

MATERIAL


► Coupling from high strength steel

DESIGN

Hub with keyway connection or cylindrical bore for shrink disc.

Optional set screw for keyway DIN 916.

Customer specified intermediate length also available.

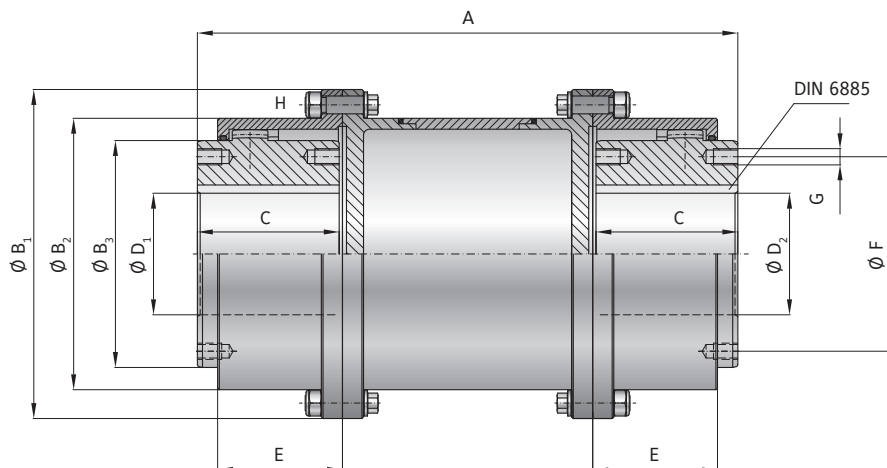

MODEL BZA | SIZE 10 – 2000

| SIZE | | 10 | 25 | 50 | 100 | 150 | 200 | 300 | 450 | 600 | 800 | 1500 | 2000 |
|--|------------|---------|---------|---------|---------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| Rated torque (kNm) | T_{KN} | 1.9 | 2.9 | 5.7 | 9 | 14.5 | 22 | 34 | 45 | 70 | 85 | 150 | 200 |
| Max. torque (kNm) | T_{Kmax} | 4.2 | 6.8 | 14 | 21.5 | 35 | 54 | 83 | 110 | 170 | 205 | 360 | 480 |
| Installed length (mm) | A | 89 | 103 | 127 | 157 | 185 | 216 | 246 | 278 | 308 | 358 | 388 | 450 |
| Outside diameter (mm) | B_1 | 111 | 142 | 168 | 200 | 225 | 265 | 300 | 330 | 370 | 406 | 438 | 505 |
| Flange diameter (mm) | B_2 | 82.5 | 104.6 | 130.5 | 158.4 | 183.4 | 211.5 | 245.5 | 275.5 | 307 | 335 | 367 | 423 |
| Hub diameter (mm) | B_3 | 68 | 86 | 105 | 132 | 151 | 179 | 209.5 | 234 | 255 | 280 | 306 | 356 |
| Hub fit length (mm) | C | 43 | 50 | 62 | 76 | 90 | 105 | 120 | 135 | 150 | 175 | 190 | 220 |
| Max bore diameter H7 with 1 / 2 keyways* (mm) | $D_{1/2}$ | 48 / 52 | 62 / 62 | 72 / 78 | 90 / 98 | 105 / 112 | 122 / 132 | 144 / 156 | 160 / 174 | 175 / 190 | 192 / 210 | 210 / 233 | 245 / 280 |
| Bore diameters from ϕ to ϕ H7 with interference fit (mm) | $D_{1/2}$ | 12-52 | 18-62 | 30-78 | 32-98 | 42-112 | 45-132 | 50-156 | 60-174 | 70-190 | 90-210 | 110-233 | 120-280 |
| Hub length (mm) | E | 39 | 46 | 59 | 78.5 | 92.5 | 108 | 123 | 139 | 154 | 179 | 194 | 225 |
| Hole circle diameter (mm) | F | 61 | 73 | 91 | 115 | 132 | 154 | 180 | 204 | 220 | 240 | 268 | 316 |
| Thread size | G | M5 | M6 | M8 | M10 | M12 | M12 | M16 | M16 | M20 | M20 | M24 | M24 |
| Bolt | H | M8 | M10 | M10 | M12 | M12 | M16 | M16 | M16 | M18 | M22 | M22 | M24 |
| Tightening torque (Nm) | H | 18 | 36 | 36 | 65 | 65 | 150 | 150 | 150 | 220 | 400 | 400 | 520 |
| Axial misalignment (mm) | S | 1.5 | 1.5 | 1.5 | 2.5 | 2.5 | 3 | 4 | 4 | 4 | 4 | 4 | 5 |
| Angular misalignment (Degree) | | 2×0.35 | 2×0.35 | 2×0.35 | 2×0.35 | 2×0.35 | 2×0.35 | 2×0.35 | 2×0.35 | 2×0.35 | 2×0.35 | 2×0.35 | 2×0.35 |

* Larger maximum bore possible with 2 keyways, due to increased stress distribution versus wall thickness.

| ORDERING EXAMPLE | BZA | 50 | 1200 | 60 | 50 | XX |
|-------------------|-----|----|------|----|----|----|
| Model | ● | | | | | |
| Size | | ● | | | | |
| Overall length mm | | | ● | | | |
| Bore ϕ D1 H7 | | | | ● | | |
| Bore ϕ D2 H7 | | | | | ● | |

Special designation only (e.g. special bore tolerance).

For custom features place an XX at the end of the part number and describe the special requirements (e.g. BZA / 50 / 1200 / 60 / 50 / XX)

BZA

WITH KEYWAY MOUNTING

290,000 – 2,080,000 Nm

**NEW**


PROPERTIES

MATERIAL

► Coupling from high strength steel

DESIGN

Hub with keyway connection or cylindrical bore for shrink disc. Optional set screw for keyway DIN 916. Customer specified intermediate length also available.

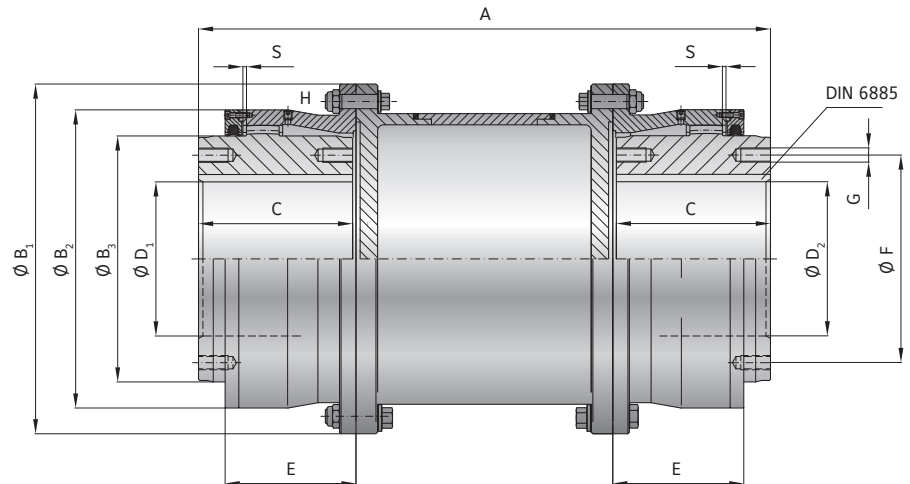

MODEL BZA | SIZE 3000 - 10000

| SIZE | | | 3000 | 4000 | 5000 | 7000 | 8000 | 10000 |
|---|----------|------------|---------|---------|---------|---------|---------|---------|
| Rated torque | (kNm) | T_{KN} | 290 | 402 | 518 | 693 | 882 | 1040 |
| Max. torque | (kNm) | T_{Kmax} | 580 | 804 | 1036 | 1386 | 1764 | 2080 |
| Installed length | (mm) | A | 532 | 592 | 652 | 712 | 772 | 820 |
| Outside diameter | (mm) | B_1 | 590 | 639 | 702 | 769 | 834 | 894 |
| Flange diameter | (mm) | B_2 | 503 | 553 | 597 | 657 | 722 | 763 |
| Hub diameter | (mm) | B_3 | 415 | 464 | 490 | 545 | 620 | 660 |
| Hub fit length | (mm) | C | 260 | 290 | 320 | 350 | 380 | 400 |
| Bore diameter H7 | (mm) | $D_{1/2}$ | 160-325 | 180-370 | 200-400 | 200-430 | 230-475 | 250-510 |
| Bore diameters from ϕ to ϕ H7 with interference fit | (mm) | $D_{1/2}$ | 160-325 | 180-370 | 200-400 | 200-430 | 230-475 | 250-510 |
| Hub length | (mm) | E | 221 | 245.5 | 262 | 280 | 292 | 315 |
| Hole circle diameter | (mm) | F | 350 | 400 | 430 | 490 | 560 | 580 |
| Thread | | G | M24 | M24 | M30 | M30 | M24 | M36 |
| Bolt | | H | M24 | M24 | M30 | M30 | M30 | M36 |
| Tightening torque | (Nm) | | 670 | 670 | 1250 | 1250 | 1250 | 2170 |
| Axial misalignment | (mm) | S | 6 | 6 | 6 | 6 | 6 | 10 |
| Angular misalignment | (Degree) | | 2×0.35 | 2×0.35 | 2×0.35 | 2×0.35 | 2×0.35 | 2×0.35 |


CROWNED GEAR
COUPLINGS BZ

| ORDERING EXAMPLE | BZA | 3000 | 1200 | 160 | 280 | XX |
|-------------------|-----|------|------|-----|-----|----|
| Model | ● | | | | | |
| Size | | ● | | | | |
| Overall length mm | | | ● | | | |
| Bore ϕ D1 H7 | | | | ● | | |
| Bore ϕ D2 H7 | | | | | ● | |

Special designation only
(e.g. special bore tolerance).


For custom features place an XX at the end of the part number and describe the special requirements (e.g. BZA / 3000 / 1200 / 160 / 280 / XX)

FLEXIBLE GEAR COUPLINGS - FURTHER POSSIBILITIES

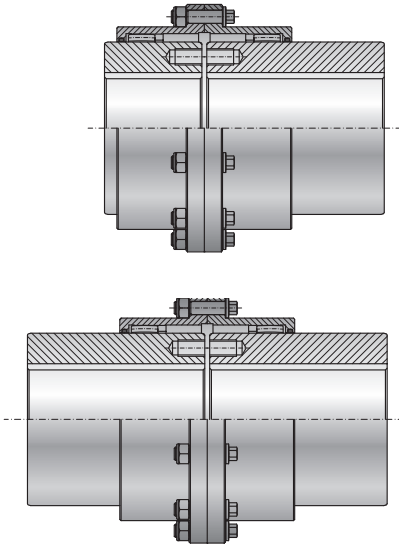


WITH EXTENDED HUB ON ONE OR BOTH ENDS

- ▶ Hub length is customizable
- ▶ Easy replacement of existing gear couplings
- ▶ Optimal utilization of available space

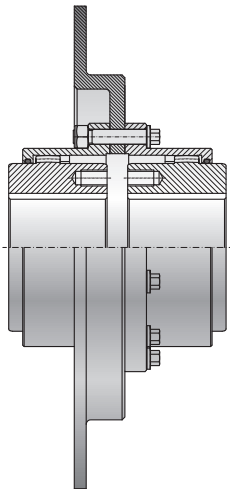

WITH BRAKE DISC

- ▶ custom dimensions available
- ▶ use for holding or emergency stopping

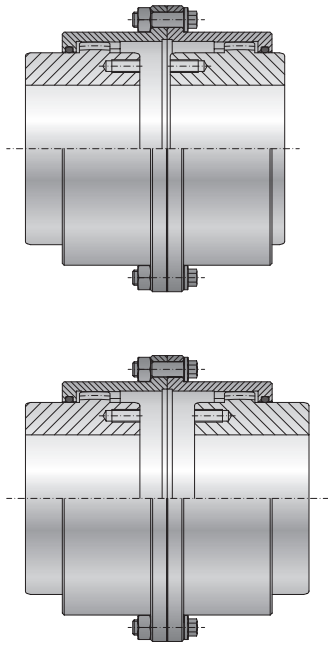


WITH REVERSED HUB ON ONE OR BOTH ENDS

- ▶ for minor increases in the distance between shaft ends
- ▶ optimized torque transfer with best shaft engagement
- ▶ longer life





BACKLASH FREE, TORSIONALLY STIFF METALLIC BELLOWS COUPLINGS 10,000- 100,000 Nm



GENERAL INFORMATION ABOUT R+W BELLOWS COUPLINGS:



SERVICE LIFE

R+W bellows couplings are fatigue resistant and wear free for an infinite service life, as long as the technical limits are not exceeded.

FIT CLEARANCE

Overall shaft / hub clearance of 0.03 - 0.08 mm

TEMPERATURE RANGE

-40 to +300° C

SPECIAL SOLUTIONS




Various materials, tolerances, dimensions and performance ratings available for custom applications on request.

ATEX (Optional)

For use in hazardous areas available upon request.



TORSIONALLY STIFF METALLIC BELLOWS COUPLINGS 10,000 – 100,000 Nm

| MODEL | | FEATURES | |
|------------|---|---|----------|
| BX1 |  | with flange mounting from 10,000 - 100,000 Nm ▶ for customer specific applications | Page 105 |
| BX4 |  | with simple keyway mounting from 10,000 - 100,000 Nm ▶ low backlash keyway connection ▶ compact, simple design | Page 106 |
| BX6 |  | with conical clamping ring from 10,000 - 100,000 Nm ▶ backlash free conical clamping ▶ high shaft clamping pressure | Page 107 |

BX1

WITH FLANGE MOUNTING

10,000 - 100,000 Nm



PROPERTIES

FEATURES


- ▶ compact, simple design
- ▶ high misalignment compensation
- ▶ integral support system (size 25 and up)

MATERIAL

- ▶ **Hubs:** steel
- ▶ **Bellows:** highly flexible high grade stainless steel

DESIGN

Both ends with flanged hubs
 Spacer between bellows
 (optional variable length)
 (size 10 without spacer)
 welded bellows-hub connection

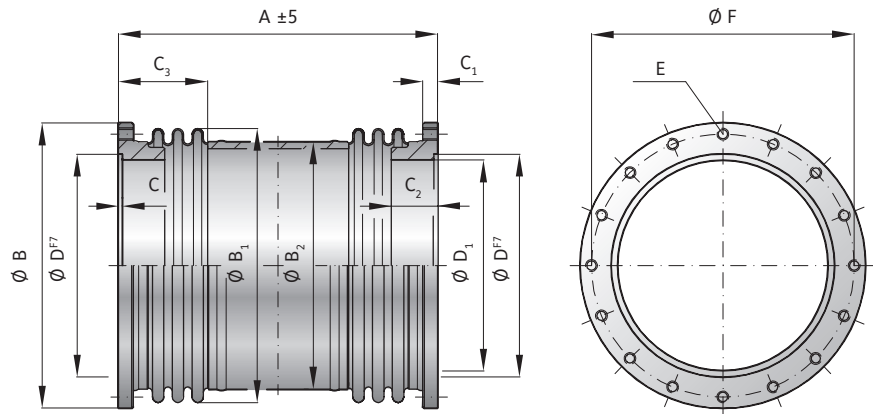

MODEL BX1 | SIZE 10 - 100

| SIZE | | | 10 | 25 | 50 | 75 | 100 |
|--|--------------------------------|------------|---------|---------|---------|---------|---------|
| Rated torque | (KNm) | T_{KN} | 10 | 25 | 50 | 75 | 100 |
| Maximum torque | (KNm) | T_{Kmax} | 15 | 38 | 75 | 113 | 150 |
| Overall length | (mm) | $A \pm 5$ | 125 | 380 | 450 | 580 | 640 |
| Outside diameter of flange | (mm) | B | 310 | 336 | 398 | 449 | 545 |
| Outside diameter of bellows ± 2 | (mm) | B_1 | 300 | 323 | 370 | 412w | 520 |
| Outside diameter of tube | (mm) | B_2 | - | 273 | 324 | 360 | 460 |
| Fit length $+0.5$ | (mm) | $C^{+0.5}$ | 4 | 5 | 6 | 10 | 15 |
| Thread depth | (mm) | C_1 | 15 | 25 | 30 | 36 | 36 |
| Hub length | (mm) | C_2 | 24 | 81 | 80 | 103 | 120 |
| Bellows body length $+3$ | (mm) | C_3 | - | 121 | 133 | 165 | 165 |
| Centering diameter F 7 | (mm) | D | 265 | 260 | 310 | 350 | 440 |
| Hub diameter $+0.3$ | (mm) | D_1 | 250 | 240 | 285 | 317 | 390 |
| Fastening threads* | | | 20x M12 | 24x M16 | 24x M20 | 20x M24 | 24x M24 |
| Tightening torque of the fastening screws (screw grade 10.9) | (Nm) | E | 120 | 300 | 580 | 1000 | 1000 |
| Bolt circle diameter ± 0.4 | (mm) | F | 290 | 304 | 361 | 404 | 500 |
| Moment of inertia | (10^{-3} kgm ²) | J_{ges} | 101 | 548 | 1185 | 2725 | 7900 |
| Approximate weight | (kg) | | 8.3 | 27.8 | 43.7 | 80 | 151 |
| Axial | \pm (mm) | Max. value | 3 | 5 | 6 | 7 | 8 |
| Lateral | \pm (mm) | | 0.4 | 2.2 | 2.5 | 3 | 3.5 |
| Angular | \pm (degree) | | 1.5 | 1 | 1 | 1 | 1 |
| Torsional stiffness coupling | (10^3 Nm/rad) | | 20,000 | 9,000 | 15,500 | 23,000 | 35,000 |
| Axial spring stiffness bellows | (N/mm) | | 985 | 3000 | 4300 | 3900 | 2800 |
| Lateral spring stiffness bellows | (KN/mm) | | 21 | 133 | 207 | 175 | 219 |

*drilling pattern between hub 1 and hub 2 not aligned as standard

| ORDERING EXAMPLE | BX1 | 50 | XX |
|----------------------------|-----|----|---|
| Model | ● | | Special designation only (e.g. stainless steel hubs) |
| Size / torque rating (KNm) | | ● | |

For custom features place an XX at the end of the part number and describe the special requirements (e.g. BX1 / 50 / XX)

BX4

WITH SIMPLE KEYWAY MOUNTING

10,000 – 100,000 Nm



PROPERTIES

FEATURES


- ▶ compact, simple design
- ▶ high misalignment compensation
- ▶ integral support system (size 25 and up)

MATERIAL

- ▶ **Hubs:** steel
- ▶ **Bellows:** highly flexible high grade stainless steel

DESIGN

Both sides with removable coupling hubs, including keyway (splines optional)
 Spacer between bellows (optional variable length) (size 10 without spacer)
 welded bellows-hub connection

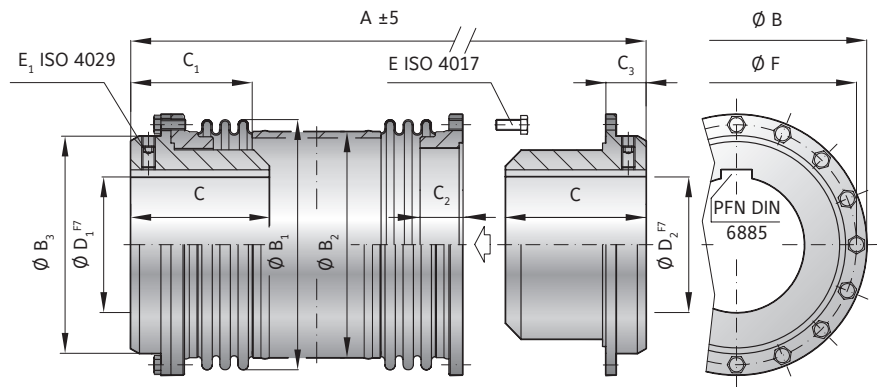

MODEL BX4 | SIZE 10 – 100

| SIZE | | | 10 | 25 | 50 | 75 | 100 |
|--|-------------|------------|----------------|----------------|----------------|-----------------|-----------------|
| Rated torque (KNm) | T_{KN} | | 10 | 25 | 50 | 75 | 100 |
| Maximum torque (KNm) | T_{Kmax} | | 15 | 38 | 75 | 113 | 150 |
| Overall length (mm) | $A_{\pm 5}$ | | 210 | 480 | 590 | 760 | 840 |
| Outside diameter of flange (mm) | B | | 310 | 336 | 398 | 449 | 545 |
| Outside diameter of bellows ± 2 (mm) | B_1 | | 300 | 323 | 370 | 412 | 520 |
| Outside diameter of tube (mm) | B_2 | | - | 273 | 324 | 360 | 460 |
| Hub diameter (mm) | B_3 | | 255 | 260 | 310 | 350 | 440 |
| Fit length (mm) | C | | 95 | 130 | 200 | 240 | 280 |
| Length ± 3 (mm) | C_1 | | - | 170 | 200 | 257 | 260 |
| Hub length (mm) | C_2 | | 24 | 81 | 80 | 103 | 120 |
| Distance (mm) | C_3 | | 42 | 49 | 70 | 90 | 100 |
| Inside diameter possible from \emptyset to $\emptyset F7$ (mm) | D_1/D_2 | | 50 – 170 | 60 – 170 | 80 – 200 | 100 – 230 | 120 – 280 |
| Fastening screw ISO 4017 / Tightening torque (Nm) | E | | 20 x M12 / 120 | 24 x M16 / 300 | 24 x M20 / 580 | 20 x M24 / 1000 | 24 x M24 / 1000 |
| Fastening screw ISO 4029 / Tightening torque (Nm) | E_1 | | M12 / 100 | M16 / 220 | M20 / 450 | M24 / 800 | M24 / 800 |
| Bolt circle diameter ± 0.4 (mm) | F | | 290 | 304 | 361 | 404 | 500 |
| Moment of inertia (10^{-3} kgm ²) | J_{ges} | | 492 | 1272 | 3270 | 6754 | 19350 |
| Approximate weight (kg) | | | 44.7 | 85 | 164 | 260 | 477 |
| Axial \pm (mm) | | Max. value | 3 | 5 | 6 | 7 | 8 |
| Lateral \pm (mm) | 0.4 | | 2.2 | 2.5 | 3 | 3.5 | |
| Angular \pm (degree) | 1.5 | | 1 | 1 | 1 | 1 | |
| Torsional stiffness coupling (10^3 Nm/rad) | | | 20,000 | 9,000 | 15,500 | 23,000 | 35,000 |

MAXIMUM TRANSMITTABLE TORQUE OF KEYWAY CONNECTION

Data is in KNm. These values relate to metric DIN 6885 keyway dimensions with 100% contact through the hub.

| Serie | Ø 60 | Ø 80 | Ø 100 | Ø 120 | Ø 140 | Ø 160 | Ø 170 | Ø 180 | Ø 200 | Ø 220 | Ø 230 | Ø 240 | Ø 260 | Ø 280 |
|-------|------|------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| 10 | x | x | x | x | x | x | x | x | x | x | x | x | x | x |
| 25 | 7 | 12 | 18 | 26 | 34 | 44 | 46 | x | x | x | x | x | x | x |
| 50 | x | 19 | 28 | 40 | 52 | 67 | 71 | 84 | 94 | x | x | x | x | x |
| 75 | x | x | 34 | 47 | 62 | 81 | 85 | 101 | 112 | 136 | 142 | x | x | x |
| 100 | x | x | x | 55 | 74 | 94 | 100 | 118 | 131 | 159 | 166 | 189 | 205 | 220 |

BX6

WITH REMOVABLE CONICAL CLAMPING RING HUB 10,000 - 100,000 Nm



PROPERTIES

FEATURES

- ▶ compact, simple design
- ▶ high misalignment compensation
- ▶ integral support (size 25 and up)

MATERIAL


- ▶ **Hubs:** steel
- ▶ **Bellows:** highly flexible high grade stainless steel

DESIGN

Both sides with removable clamping hubs including conical clamping ring system.

Spacer between bellows (optional variable length) (size 10 without spacer)

welded bellows-hub connection

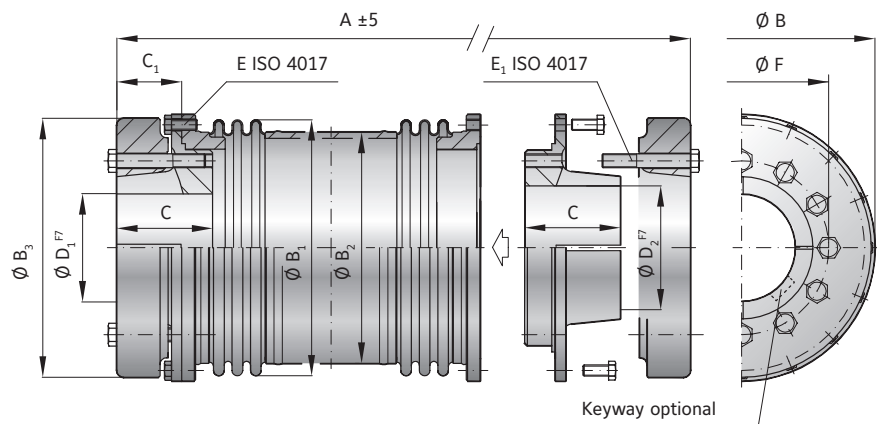

MODEL BX6 | SIZE 10 - 100

| SIZE | | | 10 | 25 | 50 | 75 | 100 |
|--|-------------|------------|----------|----------|-----------|-----------|-----------|
| Rated torque (KNm) | T_{KN} | | 10 | 25 | 50 | 75 | 100 |
| Maximum torque (KNm) | T_{Kmax} | | 15 | 38 | 75 | 113 | 150 |
| Overall length (mm) | $A_{\pm 5}$ | | 235 | 530 | 650 | 840 | 940 |
| Outside diameter of flange (mm) | B | | 310 | 336 | 398 | 449 | 545 |
| Outside diameter of bellows ± 2 (mm) | B_1 | | 300 | 323 | 370 | 412 | 520 |
| Outside diameter of tube (mm) | B_2 | | - | 273 | 324 | 360 | 460 |
| Diameter of clamping ring (mm) | B_3 | | 300 | 310 | 380 | 420 | 530 |
| Fit length (mm) | C | | 90 | 110 | 140 | 170 | 200 |
| Length (mm) | C_1 | | 55 | 74 | 99 | 130 | 150 |
| Inside diameter possible from \emptyset to \emptyset F7 (mm) | D_1/D_2 | | 70 - 170 | 80 - 170 | 100 - 200 | 130 - 230 | 150 - 280 |
| Fastening screw ISO 4017 for mounting flange (mm) | E | | 20 x M12 | 24 x M16 | 24 x M20 | 20 x M24 | 24 x M24 |
| Tightening torque (Nm) | | | 120 | 300 | 580 | 1000 | 1000 |
| Fastening screw ISO 4017 for conical clamping ring (mm) | E_1 | | 8 x M16 | 12 x M16 | 12 x M20 | 16 x M20 | 12 x M24 |
| Tightening torque (Nm) | | | 200 | 250 | 300 | 350 | 600 |
| Bolt circle diameter ± 0.4 (mm) | F | | 210 | 220 | 250 | 290 | 360 |
| Moment of inertia (10^{-3} kgm ²) | J_{ges} | | 828 | 1535 | 3799 | 8277 | 24876 |
| Approximate weight (kg) | | | 60 | 93 | 168 | 280 | 550 |
| Axial \pm (mm) | | Max. value | 3 | 5 | 6 | 7 | 8 |
| Lateral \pm (mm) | 0.4 | | 2.2 | 2.5 | 3 | 3.5 | |
| Angular \pm (degree) | 1.5 | | 1 | 1 | 1 | 1 | |
| Torsional stiffness coupling (10^3 Nm/rad) | | | 20,000 | 9,000 | 15,500 | 23,000 | 35,000 |

| ORDERING EXAMPLE | BX4 BX6 | 50 | 120 | 200 | XX |
|---|-----------|----|-----|-----|----|
| Model | ● | | | | |
| Size / torque rating (KNm) | | ● | | | |
| Bore D1 F7 | | | ● | | |
| Bore D2 F7 | | | | ● | |
| Special designation only (e.g. stainless steel hubs) | | | | | |
| For custom features place an XX at the end of the part number and describe the special requirements (e.g. BX4 / 50 / 117.48 / 127 / XX; XX = 700 mm overall length) | | | | | |

BELLOWS COUPLING BX



EK**EZ**

BACKLASH FREE SERVOMAX® ELASTIC JAW COUPLINGS 1,950 – 25,000 Nm



GENERAL INFORMATION ABOUT R+W ELASTOMER COUPLINGS:



SERVICE LIFE

When properly selected, handled, and installed, these couplings are maintenance free with infinite service life.

ATEX (Optional)

For use in hazardous areas available upon request.

SPECIAL SOLUTIONS





Various materials, tolerances, dimensions and performance ratings available for custom applications on request.

FIT CLEARANCE

Overall shaft / hub clearance of 0.01 - 0.05 mm






BACKLASH FREE SERVOMAX® ELASTIC JAW COUPLINGS 1,950 – 25,000 Nm

| MODEL | | FEATURES | |
|------------|---|---|----------|
| EK1 |  | with simple keyway mounting from 1,950 - 25,000 Nm <ul style="list-style-type: none">▶ economically priced version▶ modifiable to customer specific dimensions and features | Page 112 |
| EKH |  | with fully split clamping hubs from 1,950 - 25,000 Nm <ul style="list-style-type: none">▶ easy installation and removal▶ allows for lateral mounting | Page 113 |
| EK6 |  | with conical clamping ring from 1,950 - 25,000 Nm <ul style="list-style-type: none">▶ highly concentric design▶ high clamping pressure on shafts▶ hubs mount axially▶ in case a housing will be used, no access holes are necessary | Page 114 |
| EZ2 |  | with fully split clamping hubs from 1,950 - 25,000 Nm <ul style="list-style-type: none">▶ standard lengths of up to 4 meters▶ no intermediate support bearing necessary▶ lateral installation and removal without disturbing adjacent equipment | Page 115 |

GENERAL INFORMATION

R+W ELASTIC JAW COUPLINGS

SHAFT MISALIGNMENT




FUNCTION

The equalizing element of the EK coupling is the elastomer insert. It transmits torque without backlash or vibration. The elastomer insert defines the characteristics of the entire drive system.


Backlash is eliminated by the press fit of the elastomer into the hubs. Through variation of the Shore hardness of the elastomer insert, the coupling system can be optimized for the ideal torsional characteristics.

SIZE 2500 - 9500


THE COUPLING INCLUDES 5X ELASTOMER SEGMENTS




Shore hardness 98 Sh A



Shore hardness 64 Sh D



Shore hardness 65 Sh D



Shore hardness 64 Sh D

DESCRIPTION OF THE ELASTOMER TYPES

| Type | Shore hardness | Color | Material | Relative damping (Ψ) | Temperature range | Features |
|------|----------------|-------|----------|-----------------------------|-------------------|--------------------------|
| A | 98 Sh A | red | TPU | 0.4 - 0.5 | -30°C to +100°C | high damping |
| B | 64 Sh D | green | TPU | 0.3 - 0.45 | -30°C to +120°C | high torsional stiffness |
| D* | 65 Sh D | black | TPU | 0.3 - 0.45 | -10°C to +70°C | electrically conductive |
| E | 64 Sh D | beige | Hytrell | 0.3 - 0.45 | -50°C to +150°C | temperature resistant |

* The electrical conductivity of the elastomer material is to prevent the electrostatic charging of the elastomer coupling system, to reduce the risk of sparking in operation. ATEX technical data is available upon request.

The values of the relative damping were determined at 10 Hz and +20° C.

SIZES EK

| SIZE* | | 2500 | | 4500 | | 9500 | |
|--------------------------------------|-------------|--------|--------|--------|--------|---------|---------|
| Type (elastomer insert) | | A | B | A | B | A | B |
| Static torsional stiffness (Nm/rad) | C_T | 87600 | 109000 | 167000 | 372000 | 590000 | 670000 |
| Dynamic torsional stiffness (Nm/rad) | C_{Tdyn} | 175000 | 216000 | 337000 | 743000 | 1180000 | 1340000 |
| lateral misalignment (mm) | Max. values | 0.5 | 0.3 | 0.5 | 0.3 | 0.6 | 0.4 |
| angular misalignment (Degree) | | 1.5 | 1 | 1.5 | 1 | 1.5 | 1 |
| axial misalignment (mm) | | ±3 | | ±4 | | ±5 | |

Static torsional stiffness at 50% T_{KN}

Dynamic torsional stiffness at T_{KN}

* Note: The technical values for elastomer inserts D and E correspond to the values for B, due to the identical Shore hardness.

EK1

WITH KEYWAY MOUNTING

1,950 - 25,000 Nm



PROPERTIES

FEATURES



- ▶ press fit design
- ▶ readily modified for custom dimensions
- ▶ low backlash (keyway)

MATERIAL

- ▶ **Hubs:** GGG40
- ▶ **Elastomer:** wear resistant thermally stable TPU

DESIGN

Two concentrically machined hubs with curved jaws, keyways, and set screws. 5x elastomer segments press fit for zero backlash; standard versions are electrically isolating.

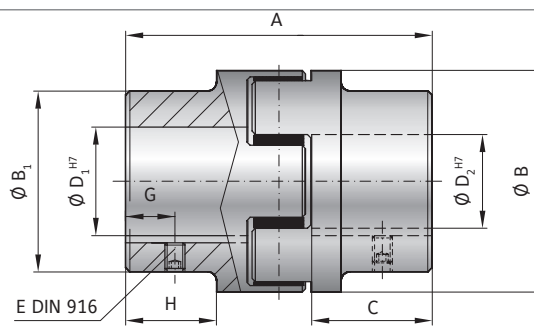

MODEL EK1 | SIZE 2500 - 9500

| SIZE | | 2500 | | 4500 | | 9500 | |
|--|--------------------------------|---|------|-----------|-------|-----------|-------|
| Type (Elastomer insert) | | A | B | A | B | A | B |
| Rated torque (Nm) | T_{KN} | 1950 | 2450 | 5000 | 6200 | 10000 | 12500 |
| Max. torque (Nm) | T_{Kmax} | 3900 | 4900 | 10000 | 12400 | 20000 | 25000 |
| Overall length (mm) | A | 213 | | 272 | | 341 | |
| Outside diameter (mm) | B/B ₁ | 160 / 154 | | 225 / 190 | | 290 / 240 | |
| Mounting length (mm) | C | 88 | | 113 | | 142 | |
| Inside diameter (pilot bored) (mm) | D _v | 30 | | 40 | | 50 | |
| Inside diameter range H7 (mm) | D _{1/2} | 30 - 95 | | 40 - 130 | | 50 - 170 | |
| Inside diameter of elastomer (mm) | D _e | 80 | | 111 | | 145 | |
| Set screws (DIN 916) | E | see table (depending on bore ϕ)** | | | | | |
| Distance (mm) | G | 25 | | 30 | | 40 | |
| Possible shortening length (mm) | H | 69 | | 89 | | 110 | |
| Moment of inertia per hub (10 ⁻³ kgm ²) | J ₁ /J ₂ | 40 | | 147 | | 480 | |
| Approx. weight (kg) | | 12,5 | | 25 | | 53 | |
| Speed standard (min ⁻¹) | | 3,500 | | 3,000 | | 2,000 | |
| Speed balanced (10 ³ min ⁻¹) | | 10 | 10 | 8 | 8 | 6,5 | 6,5 |

For information on shaft misalignment, torsional stiffness, and other details about the elastomer inserts see page 97.

| ** Set screw | ORDERING EXAMPLE | EK1 | 2500 | A | 50.8 | 80 | XX |
|--|-----------------------|-----|------|---|------|----|---|
| ϕ 12.1 - 30 M5 | Model | ● | | | | | Special designation only (e.g. special bore tolerance). |
| ϕ 30.1 - 58 M8 | Size | | ● | | | | |
| ϕ 58.1 - 95 M10 | Elastomer insert type | | | ● | | | |
| ϕ 95.1 - 130 M12 | Bore D1 H7 | | | | ● | | |
| ϕ 130.1 - 170 M16 | Bore D2 H7 | | | | | ● | |
| For custom features place an XX at the end of the part number and describe the special requirements (e.g. EK1 / 2500 / A / 50.8 / 80 / XX; XX = stainless steel) | | | | | | | |

WITH FULLY SPLIT CLAMPING HUB 1,950 - 25,000 Nm



PROPERTIES

FEATURES

- ▶ lateral mounting
- ▶ easy installation and removal
- ▶ allows for pre-alignment of shafts



MATERIAL

- ▶ **Hubs:** GGG40
- ▶ **Elastomer:** wear resistant thermally stable TPU

DESIGN

Two concentrically machined, fully split hubs with curved jaws and clamping screws. 5x elastomer segments press fit for zero backlash; standard versions are electrically isolating.

ORDERING EXAMPLE
see page 98

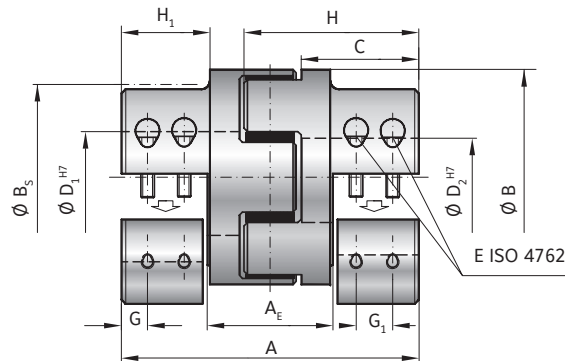

elastomer insert type A / B

MODEL EKH | SIZE 2500 - 9500

| SIZE | | | 2500 | | 4500 | | 9500 | |
|---|------------|--|----------|------|----------|-------|-----------|-------|
| Type (Elastomer insert) | | | A | B | A | B | A | B |
| Rated torque (Nm) | T_{KN} | | 1950 | 2450 | 5000 | 6200 | 10000 | 12500 |
| Max. torque* (Nm) | T_{Kmax} | | 3900 | 4900 | 10000 | 12400 | 20000 | 25000 |
| Overall length (mm) | A | | 213 | | 272 | | 341 | |
| Length of center section (mm) | A_E | | 78 | | 104 | | 131 | |
| Outside diameter (mm) | B | | 160 | | 225 | | 290 | |
| Outside diameter with screw head (mm) | B_5 | | 156 | | 199 | | 243 | |
| Mounting length (mm) | C | | 85 | | 113 | | 140 | |
| Inside diameter range H7 (mm) | $D_{1/2}$ | | 35 - 90 | | 40 - 120 | | 50 - 140 | |
| Inside diameter of elastomer (mm) | D_E | | 80 | | 111 | | 145 | |
| Clamping screw (ISO 4762) | | | 8 × M16 | | 8 × M20 | | 8 × M24 | |
| Tightening torque of the clamping screw (Nm) | E | | 300 | | 600 | | 1100 | |
| Distance between centers (mm) | F | | 57 | | 75 | | 90 | |
| Distance (mm) | G/ G_1 | | 36 | | 24 / 41 | | 30 / 48 | |
| Hub length (mm) | H/ H_1 | | 120 / 69 | | 154 / 89 | | 193 / 110 | |
| Moment of inertia per hub (10^{-3} kgm^2) | J_1/J_2 | | 40 | | 147 | | 480 | |
| Approx. weight (kg) | | | 12.5 | | 25 | | 53 | |
| Speed standard (min^{-1}) | | | 3,000 | | 3,500 | | 2,000 | |
| Speed balanced (10^2 min^{-1}) | | | 10 | 10 | 8 | 8 | 6.5 | 6.5 |

For information on shaft misalignment, torsional stiffness, and other details about the elastomer inserts see page 97.

** Maximum transmittable torque of the clamping hub depends on the bore diameter

| Size | Ø 35 | Ø 45 | Ø 50 | Ø 55 | Ø 60 | Ø 65 | Ø 70 | Ø 75 | Ø 80 | Ø 90 | Ø 120 | Ø 140 |
|------|------|------|------|------|------|------|------|------|------|------|-------|-------|
| 2500 | 1400 | 1800 | 2000 | 2250 | 2500 | 2700 | 2900 | 3100 | 3300 | 3700 | | |
| 4500 | | 2400 | 2600 | 2900 | 3100 | 3400 | 3600 | 3900 | 4100 | 4700 | 6200 | |
| 9500 | | | 5000 | 5500 | 6000 | 6500 | 7000 | 7500 | 8000 | 9000 | 12000 | 14000 |

Higher torques possible with keyway.

EK6

WITH CONICAL CLAMPING RING

1,950 - 25,000 Nm



PROPERTIES

FEATURES


- ▶ high clamping pressure
- ▶ self centering on shaft
- ▶ very high concentricity

MATERIAL

- ▶ **Hubs:** GGG40
- ▶ **Elastomer:** wear resistant thermally stable TPU

DESIGN

Two concentrically machined hubs with curved jaws and conical clamping rings. 5x elastomer segments press fit for zero backlash; standard versions are electrically isolating.

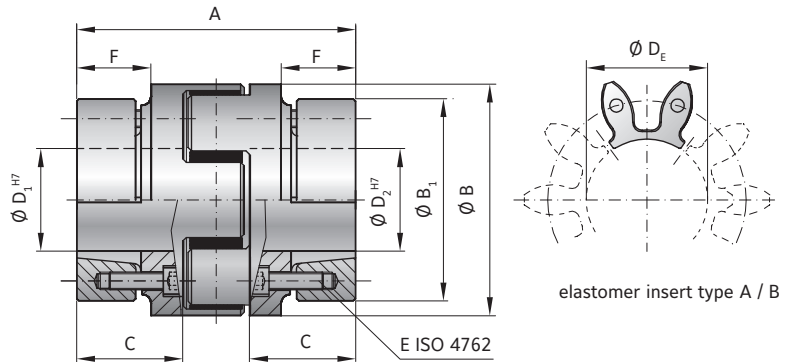

MODEL EK6 | SIZE 2500 - 9500

| SIZE | | 2500 | | 4500 | | 9500 | |
|---|------------|-----------|------|-----------|-------|----------|-------|
| Type (Elastomer insert) | | A | B | A | B | A | B |
| Rated torque (Nm) | T_{KN} | 1950 | 2450 | 5000 | 6200 | 10000 | 12500 |
| Max. torque (Nm) | T_{Kmax} | 3900 | 4900 | 10000 | 12400 | 20000 | 25000 |
| Overall length (mm) | A | 177 | | 227 | | 282 | |
| Outside diameter (mm) | B/B_1 | 160 / 159 | | 225 / 208 | | 285 | |
| Mounting length (mm) | C | 70 | | 90 | | 112 | |
| Inside diameter range H7 (mm) | $D_{1/2}$ | 40 - 95 | | 50 - 130 | | 60 - 170 | |
| Inside diameter of elastomer (mm) | D_E | 80 | | 111 | | 145 | |
| Clamping screw (ISO 4762) | | 10x M10 | | 10x M12 | | 10x M16 | |
| Tightening torque of the clamping screw (Nm) | E | 60 | | 100 | | 160 | |
| Distance (mm) | F | 51 | | 66 | | 80 | |
| Moment of inertia per hub (10^{-3} kgm^2) | J_1/J_2 | 31.7 | | 135.7 | | 469.2 | |
| Approx. weight (kg) | | 15 | | 35 | | 73 | |
| Speed standard (min^{-1}) | | 3,500 | | 3,000 | | 2,000 | |
| Speed balanced (10^3 min^{-1}) | | 10 | 10 | 8 | 8 | 6.5 | 6.5 |

For information on shaft misalignment, torsional stiffness, and other details about the elastomer inserts see page 97.

| ORDERING EXAMPLE | EK6 / EKH | 2500 | A | 50.8 | 80 | XX |
|-----------------------|-----------|------|---|------|----|---|
| Model | ● | | | | | Special designation only (e.g. special bore tolerance). |
| Size | | ● | | | | |
| Elastomer insert type | | | ● | | | |
| Bore D1 H7 | | | | ● | | |
| Bore D2 H7 | | | | | ● | |

For custom features place an XX at the end of the part number and describe the special requirements (e.g. EK6 / 2500 / A / 50.8 / 80 / XX; XX = stainless steel)

EZ2

WITH FULLY SPLIT CLAMPING HUB

1,950 - 25,000 Nm

PROPERTIES



FEATURES


- ▶ easy installation and removal
- ▶ standard lengths up to 4 meters
- ▶ no intermediate support bearings required

MATERIAL

- ▶ **Hubs:** GGG40
- ▶ **Intermediate tube:** steel, optional CFK tube on request
- ▶ **Elastomer insert:** wear resistant, thermally stable TPU

DESIGN

Two fully split clamping hubs with concave driving jaws and four clamping screws. Both coupling bodies are firmly connected to a highly straight and laterally stiff intermediate tube. Elastomer consists of five separate segments. The elastomer insert makes the coupling axially mountable, backlash free, and electrically isolating.

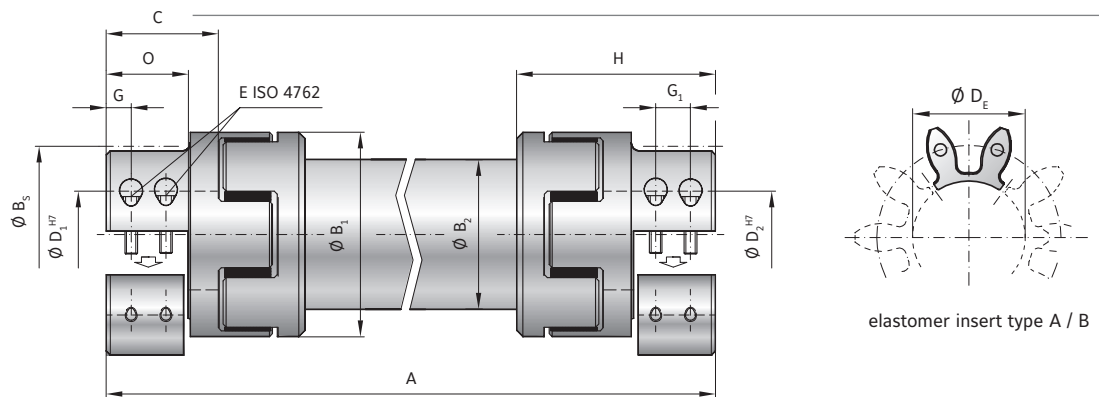

MODEL EZ2 | SIZE 2500 - 9500

| SIZE | 2500 | | 4500 | | 9500 | | |
|---|--------------|------------|---------|------------|---------|------------|---------|
| | A | B | A | B | A | B | |
| Type (Elastomer insert) | | | | | | | |
| Rated torque (Nm) | T_{KN} | 1950 | 2450 | 5000 | 6200 | 10000 | 12500 |
| Maximum torque* (Nm) | T_{Kmax} | 3900 | 4900 | 10000 | 12400 | 20000 | 25000 |
| Overall length (mm) | A | 460 - 4000 | | 580 - 4000 | | 710 - 4000 | |
| Outer diameter hub (mm) | B_1 | 160 | | 225 | | 290 | |
| Outer diameter tube (mm) | B_2 | 150 | | 175 | | 220 | |
| Outer diameter with screwhead (mm) | B_3 | 155 | | 199 | | 243 | |
| Fit length (mm) | C | 88 | | 110 | | 140 | |
| Inside diameter range from \emptyset to \emptyset H7 (mm) | $D_{1/2}$ | 35 - 90 | | 40 - 120 | | 50 - 140 | |
| Max. inside diameter (Elastomer insert) (mm) | D_E | 80 | | 111 | | 145 | |
| Mounting screw ISO 4762 | E | 8 x M16 | | 8 x M20 | | 8 x M24 | |
| Tightening torque (Nm) | | 300 | | 600 | | 980 | |
| Distance between centers (mm) | F | 57 | | 75 | | 90 | |
| Distance (mm) | G/ G_1 | 18 / 30 | | 24 / 41 | | 30 / 48 | |
| Hub length (mm) | H | 142 | | 181 | | 229 | |
| Moment of inertia per hub (10^{-3} kgm ²) | J_1/J_2 | 30 | | 140 | | 450 | |
| Inertia of tube per meter (10^{-3} kgm ²) | J_3 | 360 | | 750 | | 1.800 | |
| Combined dynamic torsional stiffness of the inserts (Nm/rad) | C_{Tdyn}^E | 87,500 | 108,000 | 168,500 | 371,500 | 590,000 | 670,000 |
| Torsional stiffness of tube per meter (Nm/rad) | C_T^{ZWR} | 950,000 | | 2,200,200 | | 5,500,000 | |
| Shaft average value (mm) | N | 108 | | 137 | | 171 | |
| Length (mm) | O | 67 | | 85 | | 105 | |

* Maximum transmittable torque of the clamping hub depends on the bore diameter - see page 99.

| ORDERING EXAMPLE | EZ2 | 2500 | 1200 | A | 50.8 | 80 | XX |
|---|-----|------|------|---|------|----|---|
| Model | ● | | | | | | Special designation only (e.g. special bore tolerance). |
| Size | | ● | | | | | |
| Overall length | | | ● | | | | |
| Elastomer insert type | | | | ● | | | |
| Bore \emptyset D1 H7 | | | | | ● | | |
| Bore \emptyset D2 H7 | | | | | | ● | |
| For custom features place an XX at the end of the part number and describe the special requirements (e.g. EZ2 / 2500 / 1200 / A / 50.8 / 80 / XX; XX = stainless steel) | | | | | | | |



ATEX

**FOR USE IN
HAZARDOUS AREAS**



FOR USE IN HAZARDOUS AREA INDUSTRIAL COUPLINGS

MARKING EXAMPLE

Based on the ATEX markings the product can be certified for suitability under certain conditions.

| | | | | | | | |
|--|--|-----------------|----------|-----------------|---|----------------------------------|---------------------|
| | | II | 2G | Ex h | IIA T6 | Gb | X |
| | | II | 2D | Ex h | IIIA T85°C | DB | X |
| | | Equipment group | Category | Protection type | Explosion subgroup / Temperature class / max. surface temperature | Equipment protection level (EPL) | Additional features |

| Equipment group | Approval type |
|-----------------|-------------------------------------|
| I | Approved for underground operation |
| II | Approved for all other applications |

| Category | Approved for zone | Zone description |
|----------|-------------------|---|
| 1G | 0 | Area in which an explosive atmosphere consisting of a mixture of air and flammable gases, vapors, or mists is present continuously, frequently or for long periods of time. |
| 2G | 1 | Area in which the potential exists for an explosive mixture of air and flammable gases, vapors or mists to occur. |
| 3G | 2 | Area in which the potential for an explosive mixture of air and flammable gases, vapors, or mists to occur is unlikely and only for a brief duration. |
| 1D | 20 | Area with the same conditions as zone 0, with powder or dust. |
| 2D | 21 | Area with the same conditions as zone 1, with powder or dust. |
| 3D | 22 | Area with the same conditions as zone 2, with powder or dust. |

| Protection type | Definition |
|-----------------|--|
| Ex h | Design safety level: ignition hazard is avoided by the product design. |

Example classification by occurring gases, mists and vapors according to temperature class and explosion group

| Temperature class / max. surface temperature | IIA | IIB (includes IIA) | IIC (includes IIA + IIB) |
|--|---|-----------------------------------|--------------------------|
| T1 / 450°C | Acetone, Ammonia, Methane, ... | City gas (gas lamp) | Hydrogen |
| T2 / 300°C | Ethyl alcohol, n-butane, cyclohexane, ... | Ethylene, Ethylene oxide | Ethine (acetylene) |
| T3 / 200°C | Gasoline, diesel, heating oil, ... | ethylene glycol, hydrogen sulfide | |
| T4 / 135°C | Acetaldehyde | ethyl ether | |
| T5 / 100°C | | | |
| T6 / 85°C | | | Carbon disulphide |

MARKING EXAMPLE

| Equipment protection level according to IEC 60079 | Importance |
|---|----------------------------|
| Ga | Very high protection level |
| Gb | High protection level |
| Gc | Extended protection level |
| Da | Very high protection level |
| Db | High protection level |
| Dc | Extended protection level |

| Additional mark | Importance |
|-----------------|--|
| X | special operating conditions (from description) |
| U | Part is a component. Conformity must be declared after installation in a device. |

GENERAL INFORMATION

The use of devices and components in potentially explosive atmospheres areas is governed by the European directives 2014/34/EU (ATEX). According to this they are with CE and receive an EU declaration of conformity as a device. The presented products are non-electrical equipment of category 2.

According to directive 2014/34/EU each delivery of an ATEX coupling requires the inclusion of special installation and operating manuals and the EU declaration of conformity issued by the manufacturer. All necessary values and specifications for installation and operation can be found in these documents.

In accordance with the Machinery Directive 2006/42/EC and the guideline for the application of the Machinery Directive 2006/42/EC of the European Commission For Enterprise and Industry, 2nd edition June 2010, editor Ian Fraser, R+W couplings are components and therefore not a machine or an incomplete machine. As a component within the meaning

of the Machinery Directive, R+W couplings are not to be marked with a CE marking, receive neither CE declaration of conformity nor installation and no serial number, and is therefore not covered by the Machinery Directive.

All models of BX, LP, EK and ST are available with ATEX certification on request. The Model BZ coupling is not intended for use in potentially explosive atmospheres.

All R+W ATEX couplings are designed for use in general suitable for industry (device group II). The operation is in the explosion endangered zones 1 and 2 (category 2G) and 21 and 22 (category 2D).

Product specific information about ATEX certified couplings, such as temperature class, are available on request.

All statements made about ATEX conforming products are based on our present knowledge and experience. R+W reserves the right to change technical specifications.